


# **TEM** 2020



On | Off and everything in between



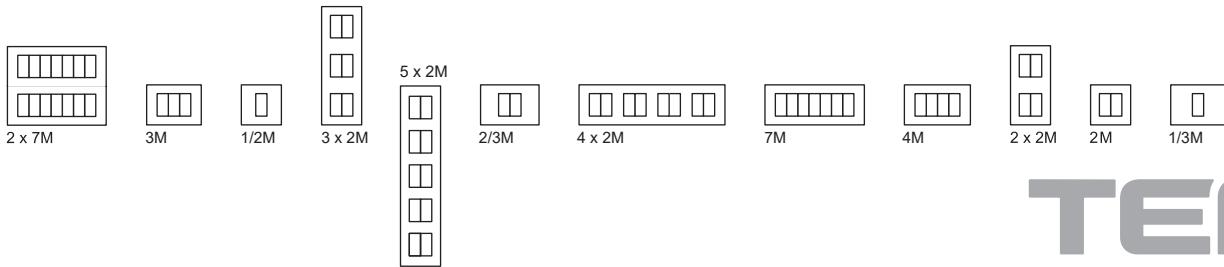

**TEM**

# Dobrodošli u obitelj M O D U L

## Welcome to the M O D U L family

Proširujemo i usavršavamo modernu obitelj Modul sklopki za sve vrste prostorija.

We are expanding and perfecting the modern Modul switch family for all types of rooms.

discovering new insights  
otkrivanje novih saznanja



# MODUL

Dizajnerske linije Pure, Line i Soft odražavaju modern, sofisticiran i neovisan životni stil. U širokoj paleti boja, uzoraka i oblika možete odabrati sklopke i utičnice koje će pristajati željenoj atmosferi i ugodaju.

The Pure, Line and Soft design lines reflect a modern, sophisticated and independent lifestyle. You can choose from a wide and rich selection of colours, patterns and shapes to alter the appearance of your switches and sockets so that they fit the desired atmosphere and mood.

PURE

prirodni materijali  
natural materials

drvo  
wood  
metal  
staklo  
metal  
glass



line



soft



ravne linije  
straight lines



meke linije  
soft lines



PURE






# predivan život wonderful living

Iz čistoće i neokaljanosti novonastalog svijeta dolazi priča linije Pure. Dodir prirodnih motiva prošaran je sofisticiranim ukusom za linije i oblik i isprepleten nitima najnovije tehnologije.

From the cleanliness and purity of a new-born world stems the story of the Pure line. The touch of natural motifs is intertwined with a sophisticated taste for lines and form and interwoven with threads of state-of-the-art technology.



PURE

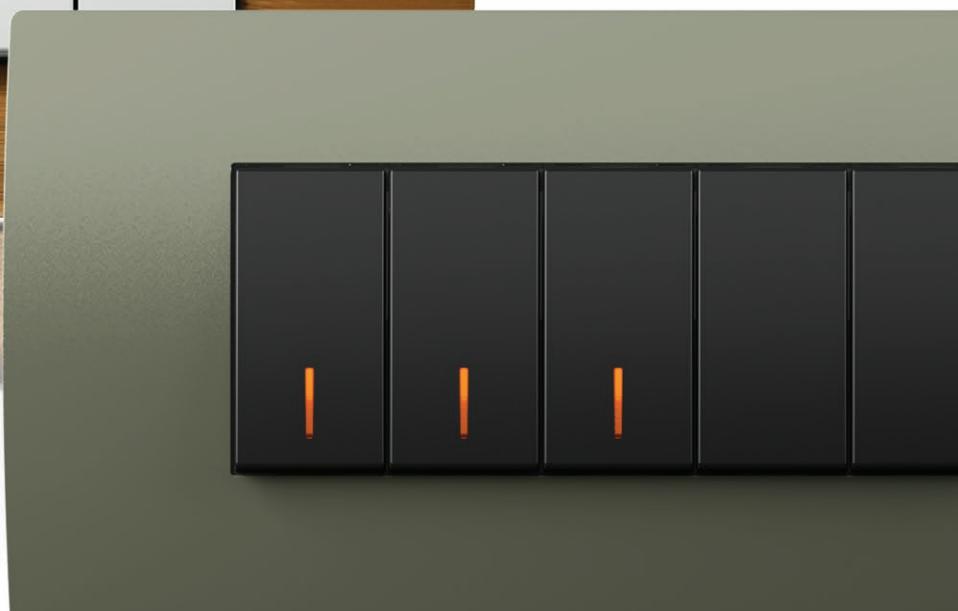




## osjetiti prirodu feeling of nature

Linija Pure sklopki ističe se svojim prirodnim materijalima: metalom, drvom i stakлом. Njezin jedinstveni dizajn ima posebnu draž. Upečatljiv, no ipak nenametljiv. Zrači senzualnošću, sofisticiranošću, visokim standardima te, naravno, čistoćom.

The Pure switch line is distinguished by its natural materials: metal, wood and glass. Its unique design gives it a special touch. It is striking yet unobtrusive. It radiates sensuality, sophistication, high standards and, of course, cleanliness.




4 x 2M

3M




2/3M



7M



4M



2 x 2M



2M



1/3M

line










# harmonija ravnih linija harmony of straight lines





Pripremite se za elegantno savršenstvo ravnih oblika. Isprobajte sjajne površine koje se poigravaju s modernim elementima vaše sobe. Samo za vas smo uključili smo „Soft Touch”, pretvarajući svaki dodir u jedinstveno iskustvo.

Prepare for the elegant perfection of straight shapes. Try brilliant surfaces that gently play with modern elements of your room. We have incorporated “Soft Touch” technology especially for you, turning every touch into a unique experience.



~~line~~





## moderan dizajn modern design

Čiste, ravne linije čine svevremenski dizajn. Savršeno ravan profil i ergonomija laganog dodira daju zapanjujuće elegantan izgled iz svih kutova.

Its straight, smooth lines make for a timeless design.  
Its perfectly straight, sleek profile and soft-touch ergonomics give it an amazingly elegant appearance from all angles.

soft



# mekoća u vašem domu softness in your home


Neka okrugli oblici i meki prijelazi unesu  
mekoću u vaš dom.

Let the rounded shapes and soft transitions  
bring softness into your home.



soft




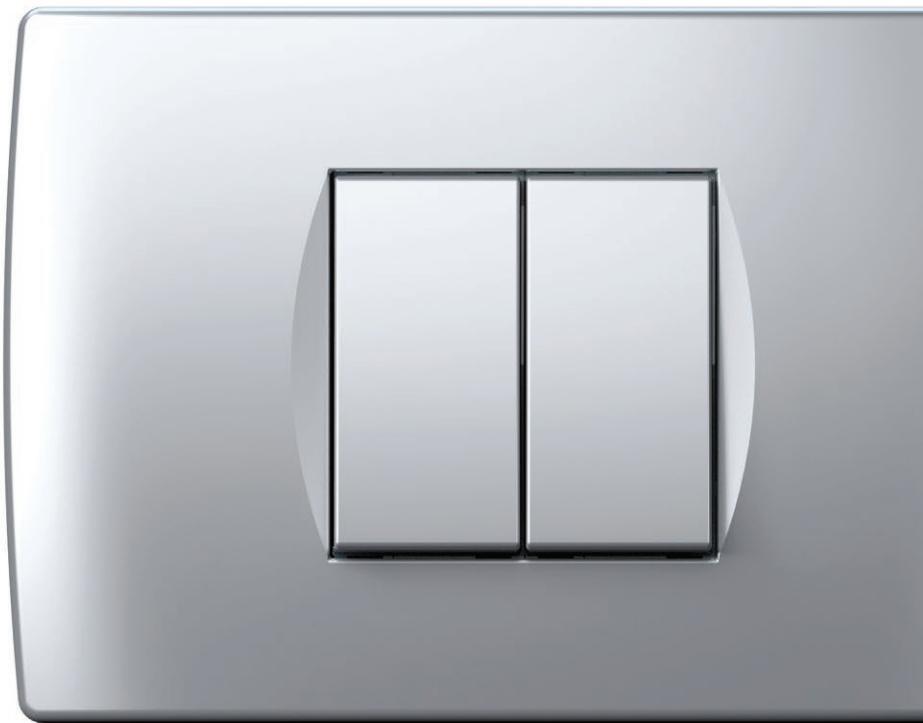

# toplina doma a warm home

Savršeno meke linije zaokružene suptilnim odabirom boja i posebnim premazima za poseban dodir.

Perfectly soft shapes rounded off by a subtle selection of colours and special coatings for a special touch.

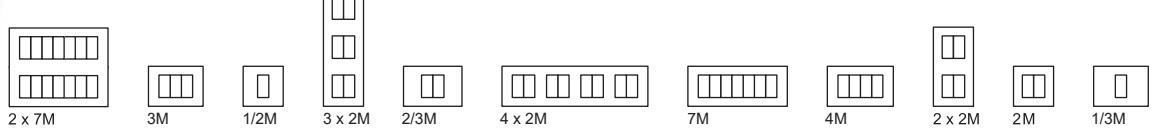



# antracit anthracite

Dodajemo dva doživljaja boja ANTRACIT i TITAN. Oba mogu zadovoljiti Vaš profinjen ukus i nadopuniti detalje prostora po Vašoj mjeri. Savršeni za harmoničnu nadogradnju Vašeg modernog, trendovskog stana.

We are adding two colour experiences to our range – ANTHRACITE and TITANIUM. They both satisfy our customer's sophisticated sense of style and complement the details of spaces according to their wishes. Now you can upgrade your modern apartment in harmony.

trendi boje  
trendy colours

19



titan  
titanium

# multifunktionalnost

## multifunctionality



## estetika

### aesthetics


Za Vas smo pripremili veće okvire koji omogućuju multifunktionalno upravljanje s jednog mesta te su dostupni u linijama LINE, SOFT i PURE. Kod prirodnih materijala okvira to ponavljanje još više dolazi do izražaja na visokoj estetskoj razini.

We have created larger cover plates for you that allow you to manage multiple functions from one spot. They are available in the LINE, SOFT and PURE design ranges. The cover plates, which are made from natural materials, utilise the repetition of design elements to elevate them to a high aesthetic level.



# univerzalni zatamnjivač

## universal dimmer



prilagodljiva  
jačina  
osvjetljenja

adjustable  
light  
intensity

odabir  
boje  
osvjetljenja

choosing  
illumination  
colour

U tami Touch postaje nježno meko ambijentalno svjetlo koje označava mjesto sklopke i nježno osvjetjava. Obilježava mjesto sklopke i nježno osvjetjava mjesto. Možete birati između osam različitih boja nježnog svjetla i prilagoditi jačinu ovisno o vašem raspoloženju.

In the dark Touch becomes a tender soft ambient light. It marks the spot of a switch and gently illuminates a place. You can choose among eight different colours of tender light and adapt its brightness according to your mood.

**TOUCH.**<sup>®</sup>

# svjetlo kakvo nije viđeno prije light as never seen before

Prigušeno svjetlo stvara mirnu, senzualnu i romantičnu atmosferu. To je osobina romantičnih mesta i mirnih večernjih sati provedenih u domu ili na poslu. Uključivanje je meko i produženo. Ne samo da produžuje vijek trajanja žarulje, već mijenja tamu u svjetlo na sporiji i znatno ugodniji nacin. Touch vam omogućava zatamnjivanje svjetla bilo gdje, neovisno o vrsti žarulje.

A dimmed light makes peaceful, sensual and romantic atmosphere. It is a trade mark of romantic places and quiet late evening hours spent at home or at work. Switching is soft and extended. It does not only prolong the lamp life expectancy, but also changes darkness into light in a slower and much more pleasant way. Touch enables you to dim the light anywhere, regardless of the type of lamps.



# multimedija

## multimedia



### sve na jednome mjestu

### everything in one place

Vaša je kuća središte vašeg života. Brojni uređaji koje koristite zahtijevaju niz konektora i utičnica. Stvorite vlastito multimedijalno središte, koje će vam omogućiti povezivanje i korištenje brojnih komponenti, sve na jednom mjestu.

Your house is the centre of your life. The multitude of devices you use requires a number of connectors and sockets. Create your own multimedia centre, one that will allow you to connect and use a multiple number of different components in one place.



# inovativna kontrola temperature

## innovative temperature controller

Povećajte vlastitu udobnost kontroliranjem temperature u vašim životnim i radnim prostorijama tijekom svih godišnjih doba uz pomoć pametnog termostata. Omogućava vam upravljanje uređajima za grijanje i hlađenje, a ima i eko funkciju.

Make yourself comfortable by controlling the temperature in your living and working rooms during all seasons with a smart thermostat. It allows you to control heating and cooling devices and features an eco-function.

udobnost u vašem prostoru  
comfort in your room

27



# prikladnost korištenja convenience of use



## TOUCHLESS-bez dodira

Beskontaktna sklopka dopušta vam uživanje u modernom životnom stilu, omogućujući uključivanje i isključivanje svjetla bez potrebe za fizičkim dodirom. Ta je mogućnost vrlo korisna kada imate pune ruke ili uprljane jer možete postići željene osvjetljenje bez nepotrebnog napora.

The touchless switch allows you to enjoy a modern lifestyle, enabling the turning on and off of your lights, without the need for physical interaction. This option is very useful when you find yourself with your hands full, or dirty, as you can achieve the desired lighting without undue fuss.



# moderno osvjetljenje

modern illumination





# 3D lampa

## 3D lamp

Užurbani tempo života izlaže vas konstantnom bombardiranju obiljem informacija. 3D lampe u boji pružaju elegantno rješenje za putokaze. Grafička rješenja možemo prilagoditi vašim željama.

The rapid pace of life means you are constantly being bombarded with a plenty of information. 3D colour lamp provide an elegant solution for information and direction signs. We can make graphics according to your wishes.



# BIOPASS – otključavanje bez ključeva

## BIOPASS – keyless unlocking

BIOPASS je nova generacija sklopki za otključavanje bez ključeva. Udružuje naprednu tehnologiju prepoznavanja otiska prstiju i brzog otvaranja ulaznih vrata.

Samo položite svoj prst na sklopku Biopass i vrata vašeg doma ili ureda otvorit će se. Tako jednostavno i tako vrlo sigurno. Upravljanje je jednostavno s pomoću mobilne aplikacije.

BIOPASS is the new generation of switches for keyless unlocking. It combines advanced fingerprint recognition technology with quick front door opening.

Simply put your finger on the Biopass switch and the doors to your home or office will open. It is so easy to use and incredibly secure. You can manage it effortlessly via the mobile app.

poboljšana sigurnost  
improved security

33



# individualnost individuality




## načinite po svojem make it your own

Budite drugačiji. Načinite sklopku po svojem ukusu. Možete odabratizmeđu različitih boja okvira te ih za vas možemo ukrasiti prilagođenim grafičkim rješenjima ili znakovima. Odaberite boju osvjetljenja koja odgovara ambijentu vašeg prostora.

Be different. Make a switch according to your taste. You can choose between different frame colours and we can decorate them for you with custom graphics or signs. Choose a illumination colour that suits the ambience of your room.




prikladno za javnu uporabu  
suitable for public use

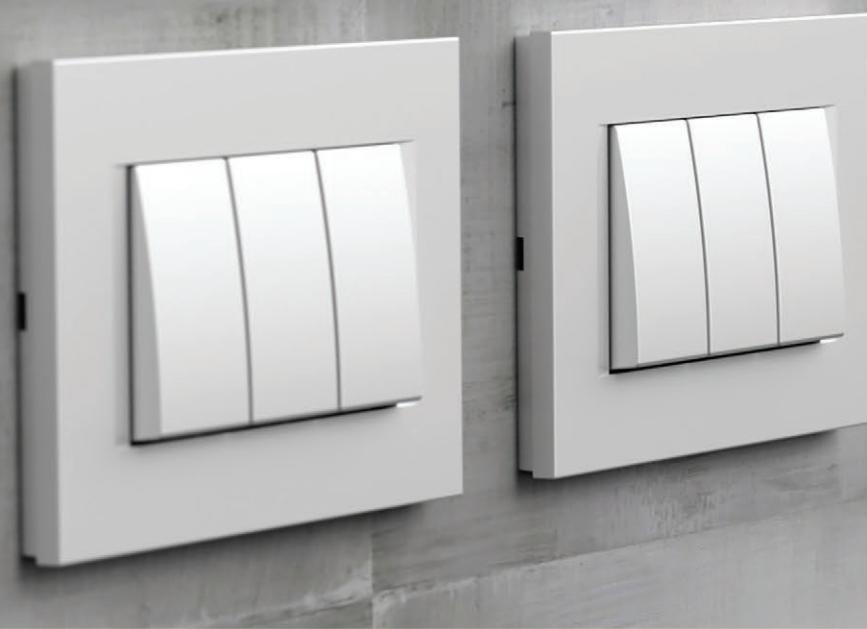

## kvaliteta i izdržljivost quality and durability

Kvalitetni i izdržljivi materijali jamče dug životni vijek modularnih sklopki i utičnica MODUL. Zbog toga je ovaj sustav prikladan za ugradnju i bezbržnu uporabu u javnim ustanovama, poslovnim zgradama, turističkim objektima, trgovačkim centrima, školama i sportskim objektima. Moguće ga je prilagoditi modernoj arhitekturi, ali i klasičnim interijerima.

Quality and durable materials ensure the long lifetime of the MODUL modular switches and sockets. The system is suitable for mounting and carefree use in public facilities, business premises, tourist accommodation, shopping centres, schools and sports facilities. It fits perfectly in both modern architecture and classical interiors.

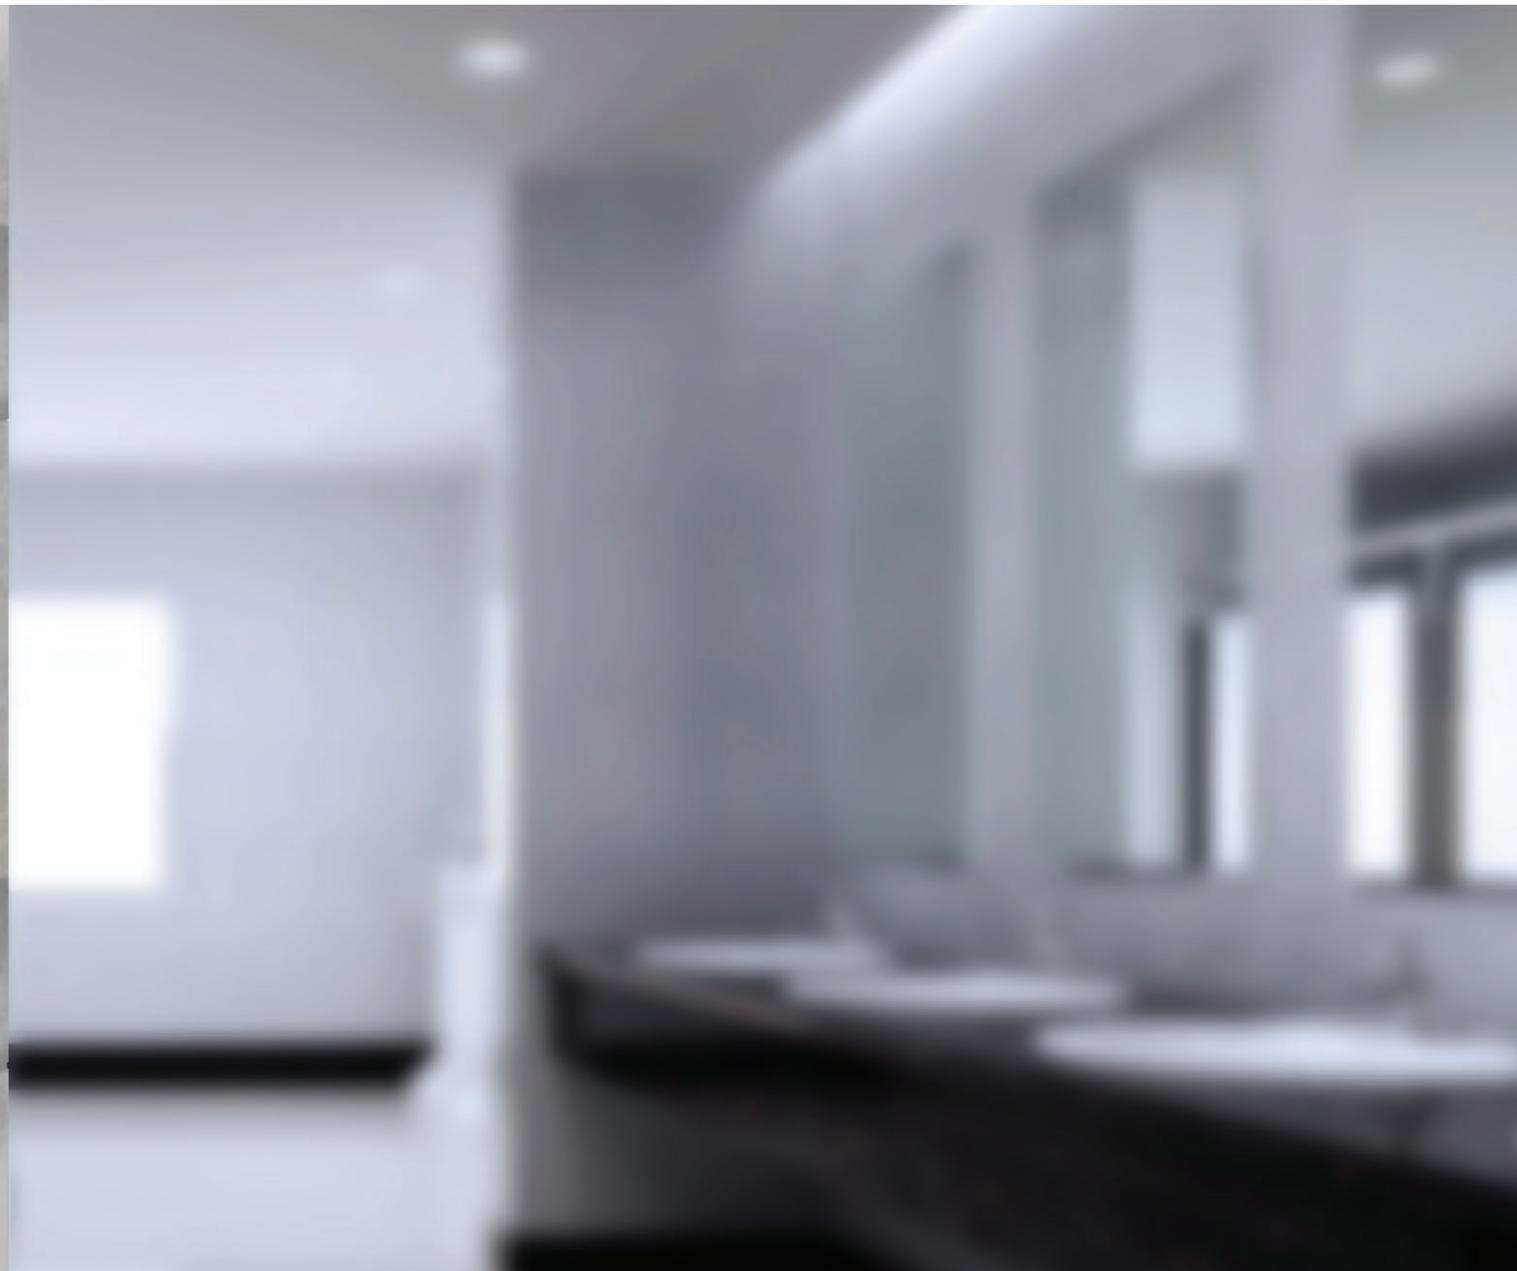



# snažni USB punjači powerful USB chargers

Uz pomoć snažnih USB punjača Modul moći ćete brzo i jednostavno napuniti pametne telefone, tablet računala i ostale e-uređaje putem standardnog USB priključka. Dostupni su u veličinama 1M i 2M. Savršeni su za korištenje, kako u privatnim, tako i u javnim prostorijama.

The powerful Modul USB chargers enable the fast and simple charging of your smartphones, tablets and other electronic devices via a standard USB connection. They are available in 1M and 2M sizes and are perfect for use in private and public rooms.

brzo punjenje  
fast charging



# moderno radno okružje

a modern working environment






# estetski aluminijski kanali aesthetic aluminium trunkings

Pobrinite se za uređenost uredskih, školskih i radnih prostorija. Riješite se vidljivih kabela i nepraktičnih produžnih kabela. Elegantni aluminijski kanali modernog izgleda nude mnogo prostora za električne instalacije. Sklopke, utičnice i komunikacijski priključci brzo su dostupni i pri ruci tamo gdje su vam potrebni. Možete ih jednostavno zamjenjivati ili naknadno dodati nove. Stvorite si ugodno i funkcionalno okružje.

Organise your office, school and work areas. Forget visible cables and unpractical extensions. The elegant and modern aluminium trunkings offer plenty of space for electrical installations. Switches, sockets and communication elements are easily accessible and available in the right place to be used. They can be easily adapted or upgraded. Arrange a pleasant and functional environment for yourself.


# modularnost

## modularity

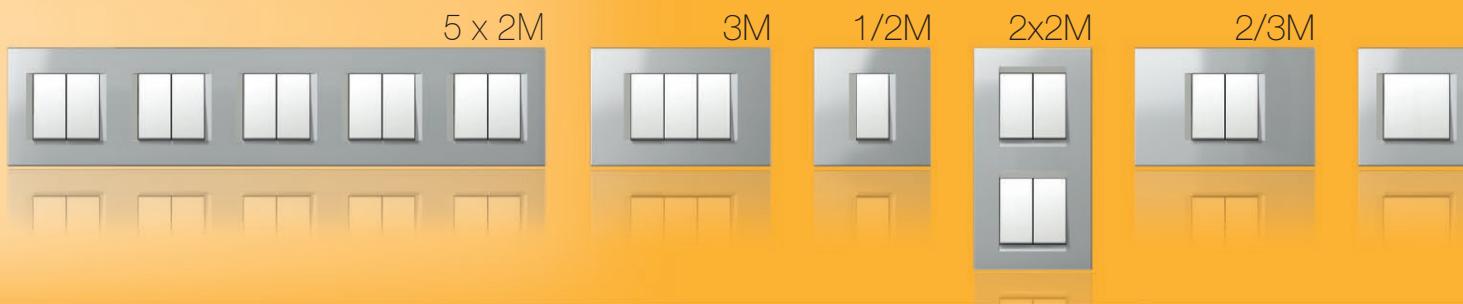

Dizajnirali smo sveobuhvatan sustav koji krase raznoliki elementi, omogućavajući vam kreiranje bilo koje konfiguracije po vašim željama. Osnovni elementi sustava su modularni te mogu biti kombinirani horizontalno ili vertikalno.

We have designed a comprehensive system that features a variety of elements, allowing you to create any configuration you wish. The basic elements of the system are modular and can be combined horizontally or vertically.

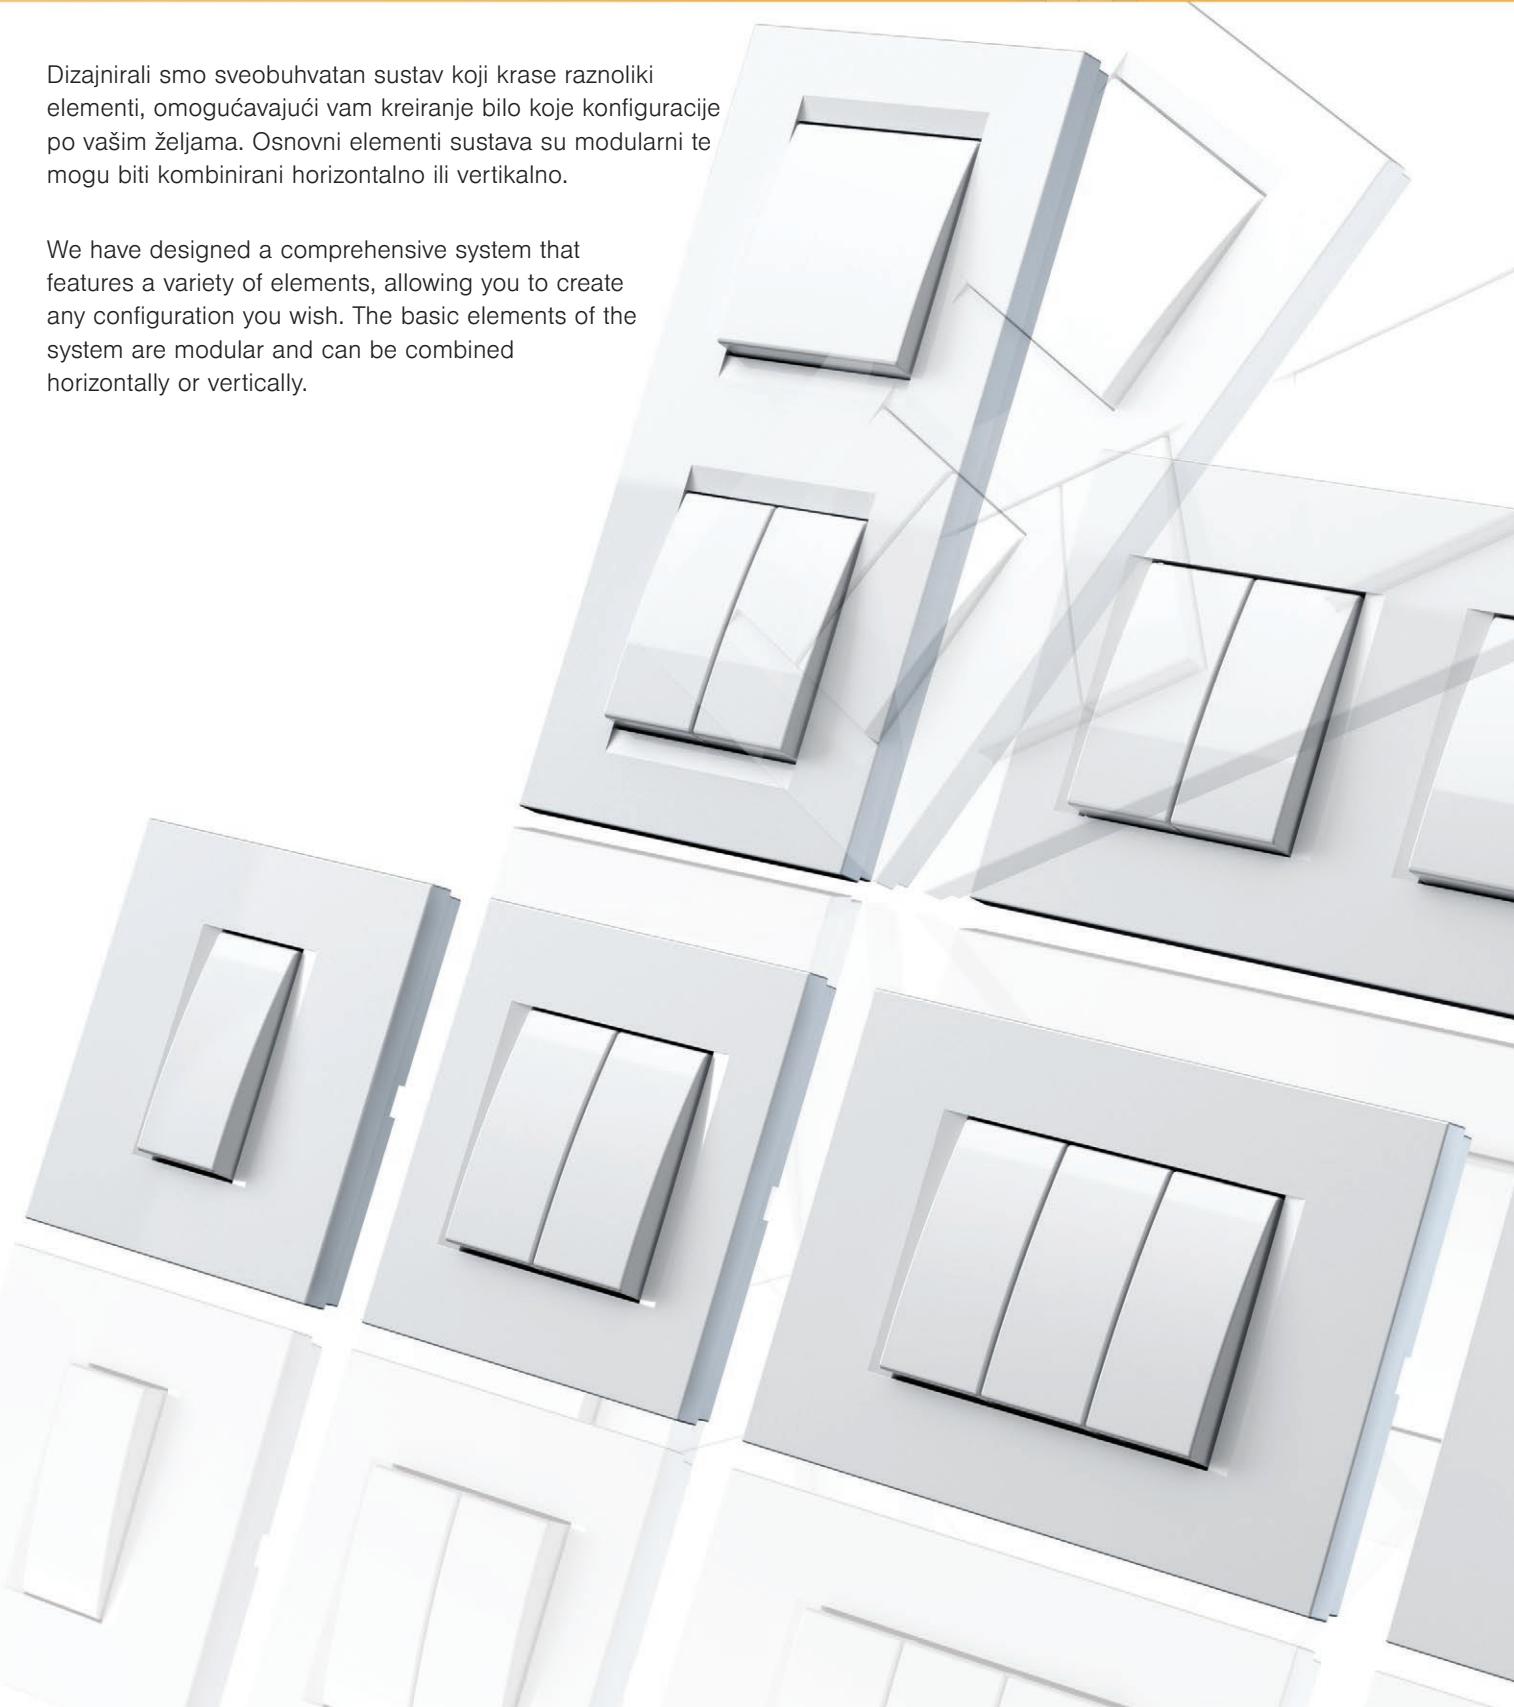



$$1M = \boxed{\text{---}}$$

$$2M = \boxed{\text{---}} \quad \boxed{\text{---}} = \boxed{\text{---}}$$

# univerzalnost

## universality

Sustav krasi sveobuhvatan izbor elemenata te jednostavnost ugradnje.  
Setovi sklopki mogu biti postavljeni na različite načine, neovisno o tome  
je li kutija okrugla ili pravokutna, izdvojena ili u nizu.

The system features a comprehensive selection of elements and is  
easy to install. Switch sets can be positioned in many different ways,  
regardless of whether the box is round or rectangular, individual or  
serial.



[modulmanager.tem.si](http://modulmanager.tem.si)






Iskušajte „ModulManager“ alat koji će vam  
pomoći da sastavite onu kombinaciju koju  
želite.

Try out the “ModulManager” tool,  
which will help you put together  
any combination you want.

## rješenja za 4 sklopke

solutions for 4 switches

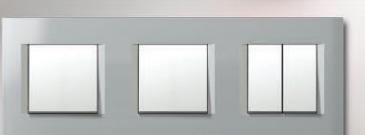1/2M	○ ○ ○ ○	
2M	○ ○ ○ ○	
2M	○ ○	
1/3M	□ □ □ □	
2/3M	○ ○ ○ ○	
2/3M	○ ○	
4M	□	
2x2M	○○	
2x2M	○○ ○○	
4x2M	○○○○	
3x2M	○○○○	

# MODUL MANAGER

jednostavno i brzo / easy and fast



Download on the  
App Store

ANDROID APP ON  
Google play



# konfigurator sklopki i utičnica configurator of switches and sockets

Modul manager vam omogućuje potpunu i brzu izradu popisa prekidača na gradilištu ili u kućnom naslonjaču. Za vas smo pripremili jedinstveni način naručivanja koji je praktičan i brz. Omogućeno vam je kreiranje boja prekidača i oblika okvira kako biste ih prilagodili vašem prostoru ili zahtjevu kupca. Isprobajte našu aplikaciju, potreban vam je samo mobilni telefon, tablet ili računalo i <http://modulmanager.tem.si>.

The Modul Manager allows you to perform a complete and quick inventory of switches from the building site itself or from the comfort of your own home. We have prepared a unique ordering method, which is both practical and quick. You can select the colours of the switches, as well as the shape of the frames, meaning you can tailor them to your space or the client's demands. Why not try us out? All you need is a smartphone, a tablet, or a computer and <http://modulmanager.tem.si>.

# funkcionalnost

## functionality

Modul je razvijen za one koji cijene pomno dizajniran proizvod. Sustav zauzima manje prostora jer bilo koja kombinacija funkcijskih elemenata može biti ugrađena u isti okvir. Prikladan je za nove i obnovljene građevine.

The Modul was developed for those who can appreciate a thoughtfully designed product. The system takes up less space, as any combination of function elements can be fitted inside the same cover plate. It is suitable for new, as well as renovated buildings.



Modul Soft je dostupan i s antibakterijskim rješenjem AB.

The Modul Soft is also available in an antibacterial solution AW.

dekorativni okviri  
decorative cover plates



funkcijski elementi  
function elements




# jednostavnost

## simplicity


Funkcionalni elementi jednostavno se ugrađuju u nosač. Rješenje „klik-in, klik-out“ koje smo za vas osmisili smanjiće vrijeme ugradnje. Kontakti spojeva lako su dostupni s prednje strane.

The function elements are easily fitted inside the mounting frame. The “klik-in, klik-out” solution we have developed for you will reduce installation time. The connection contacts are easily accessible from the front.

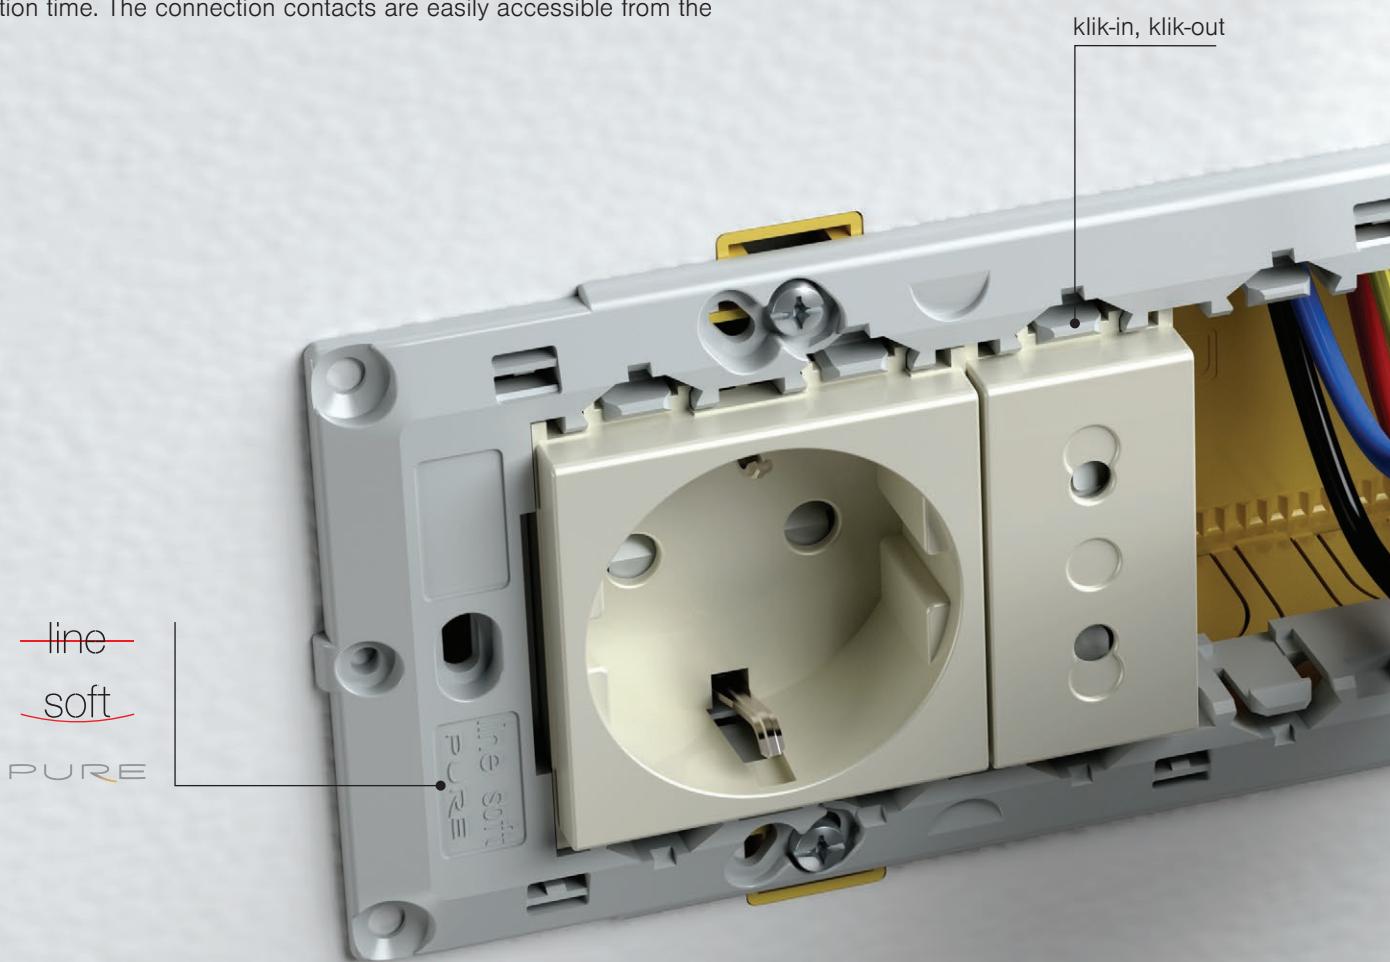



„klik-out“ – brzo i jednostavno, bez potrebe za vijcima.

“klik-out” - simple and quick, no screws necessary.



Pravokutne kutije imaju više mesta za žice spajanja.

Rectangular boxes have more space for connection wires.

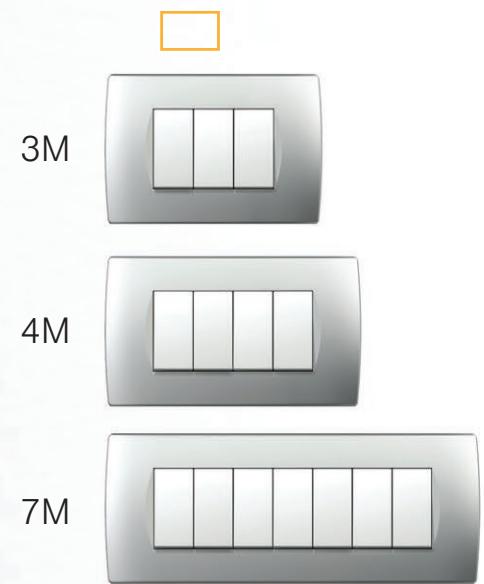
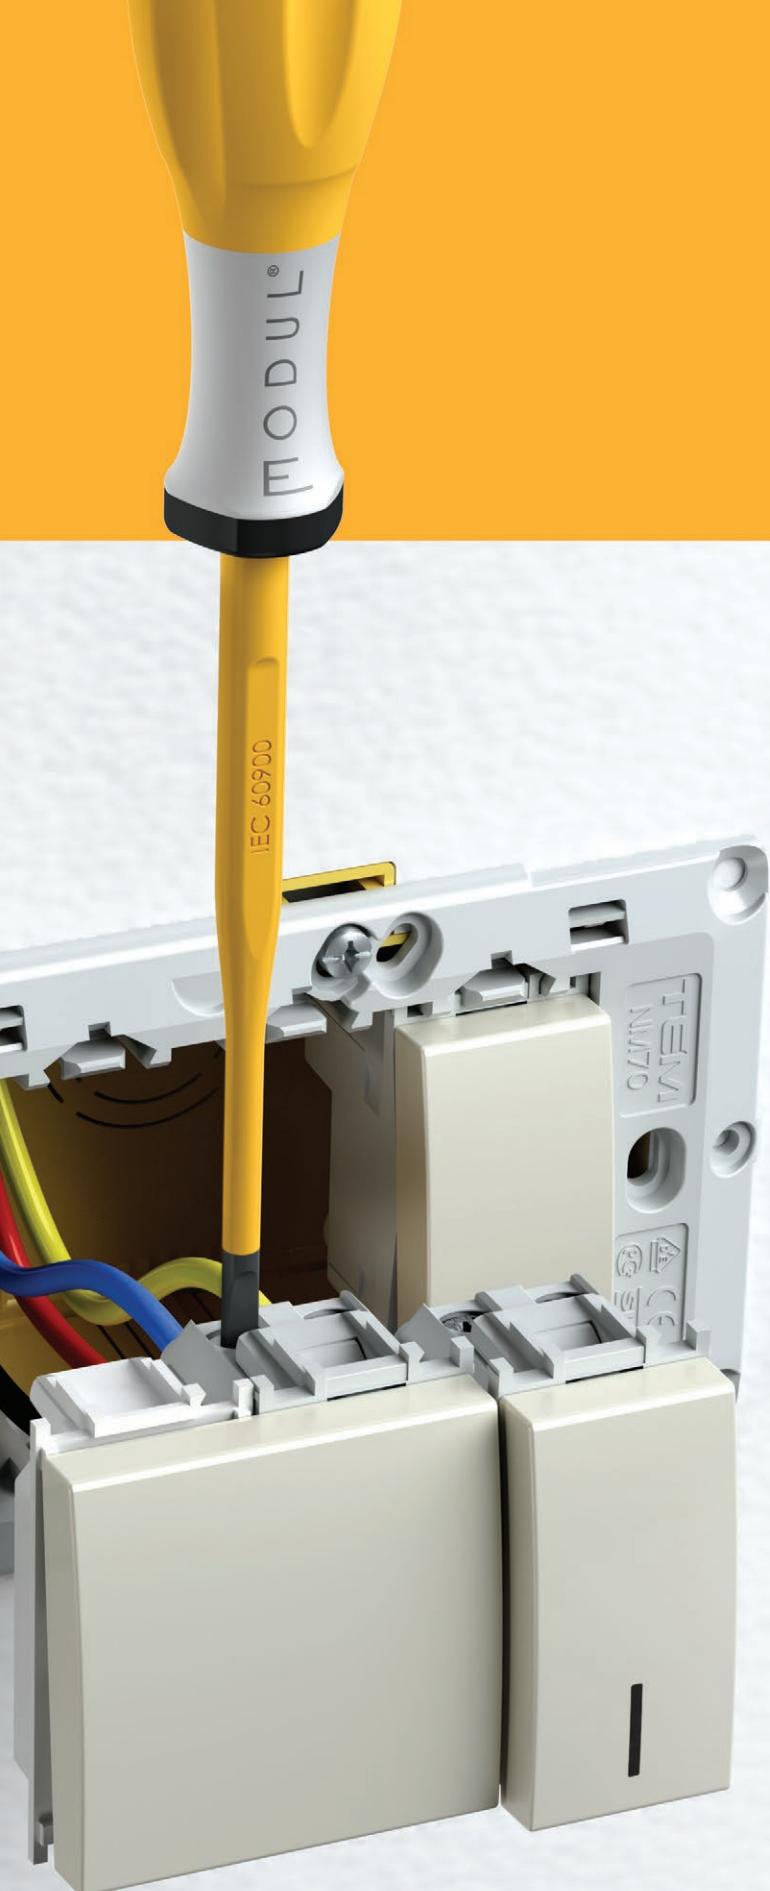


# kombiniranje

## combinability


Modul pruža brojne mogućnosti, čak i s okruglim kutijama. Možete ih kombinirati horizontalno ili vertikalno, zasebno ili u grupama. Metalni ugradbeni okvir osigurava izvrsnu stabilnost, čak i s grubim korištenjem, te je prikladan za sve okvire.

The Modul enables a many possibilities even with round boxes. You can combine them horizontally or vertically, individually or in groups. The metal mounting frame ensures excellent stability even with rough use and is suitable for any decorative cover plates.

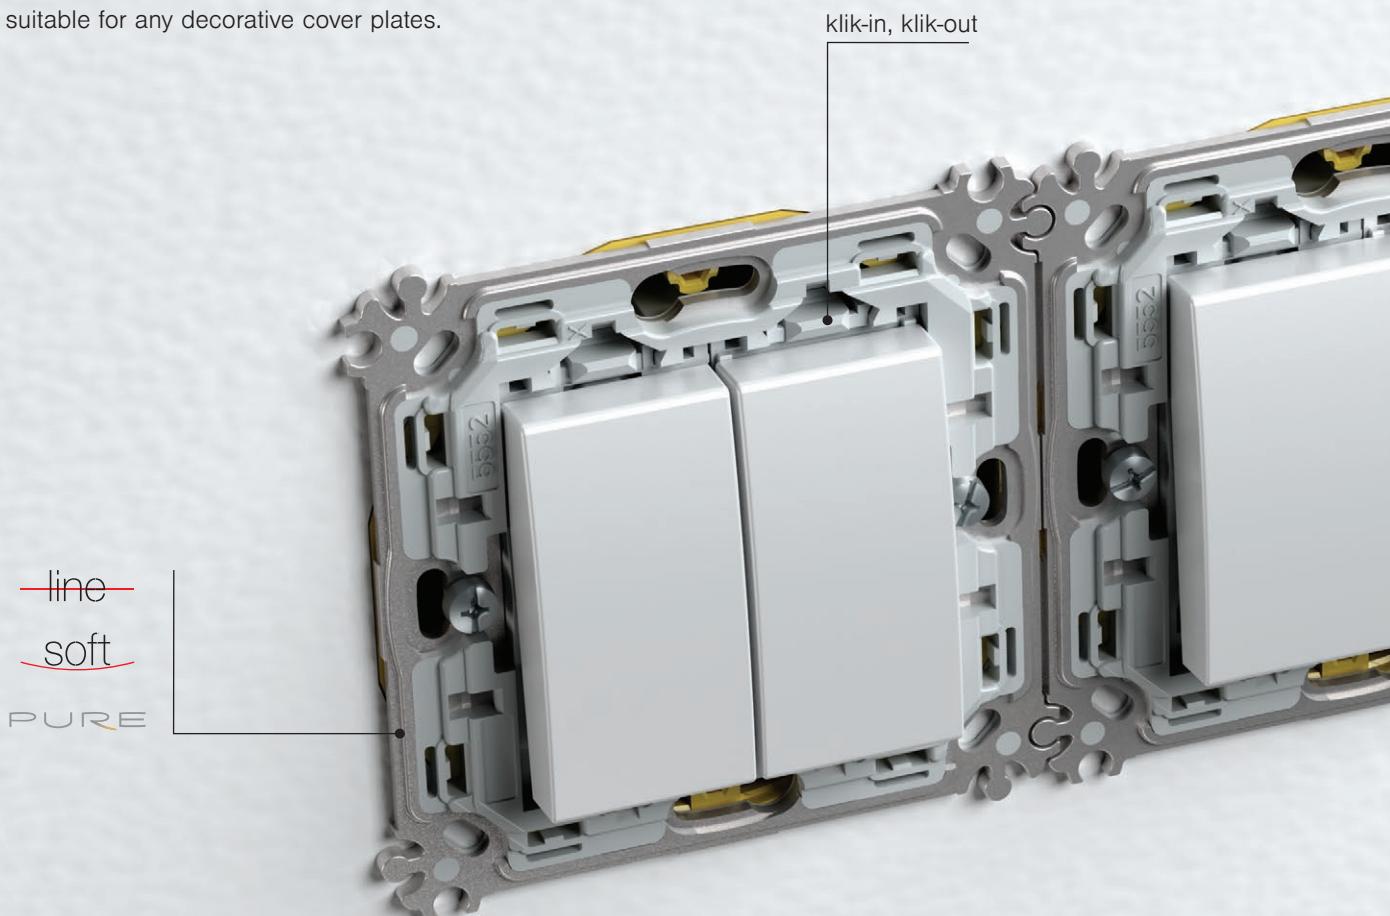



Isti okvir može biti postavljen horizontalno ili vertikalno.

The same cover plate can be positioned horizontally or vertically.



Ugradbeni okvir može biti pričvršćen vijcima ili zupčastim spojevima.

Mounting frames can be fixed with screws or claws.

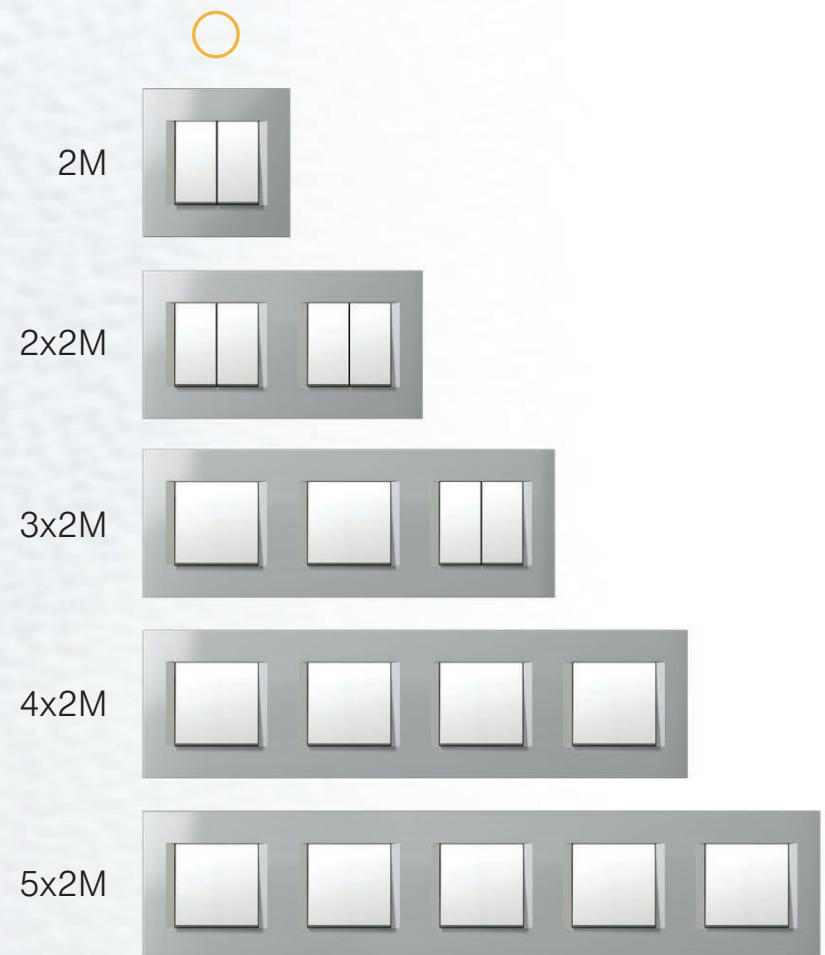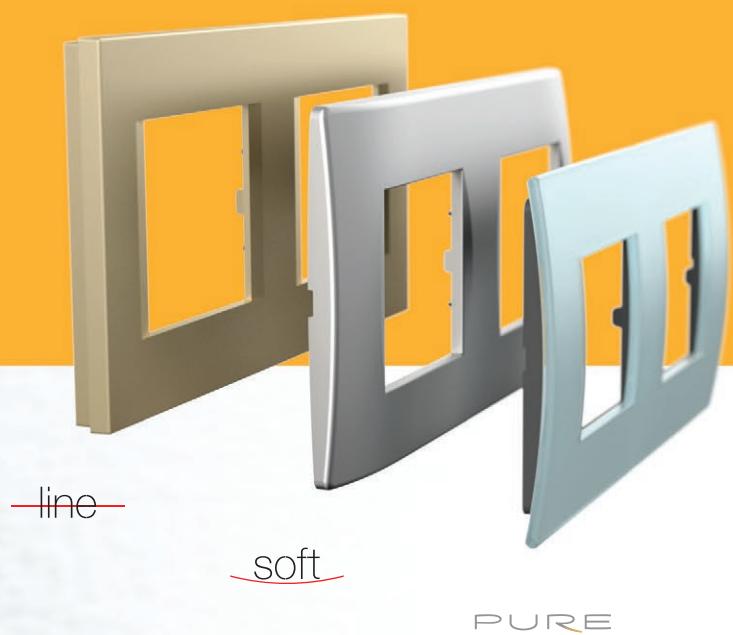

2M ugradbeni okviri lako se spajaju u grupe.

2M mounting frames are easily joined into groups.

# univerzalnost

## universality



2M



line



soft



PURE




2 x 2M




3 x 2M




2M




2 x 2M




3 x 2M



4 x 2M




5 x 2M




Sustav je univerzalan te se može ugraditi i u okrugle i u pravokutne kutije.

The system is universal and can be fitted in both round and rectangular boxes.

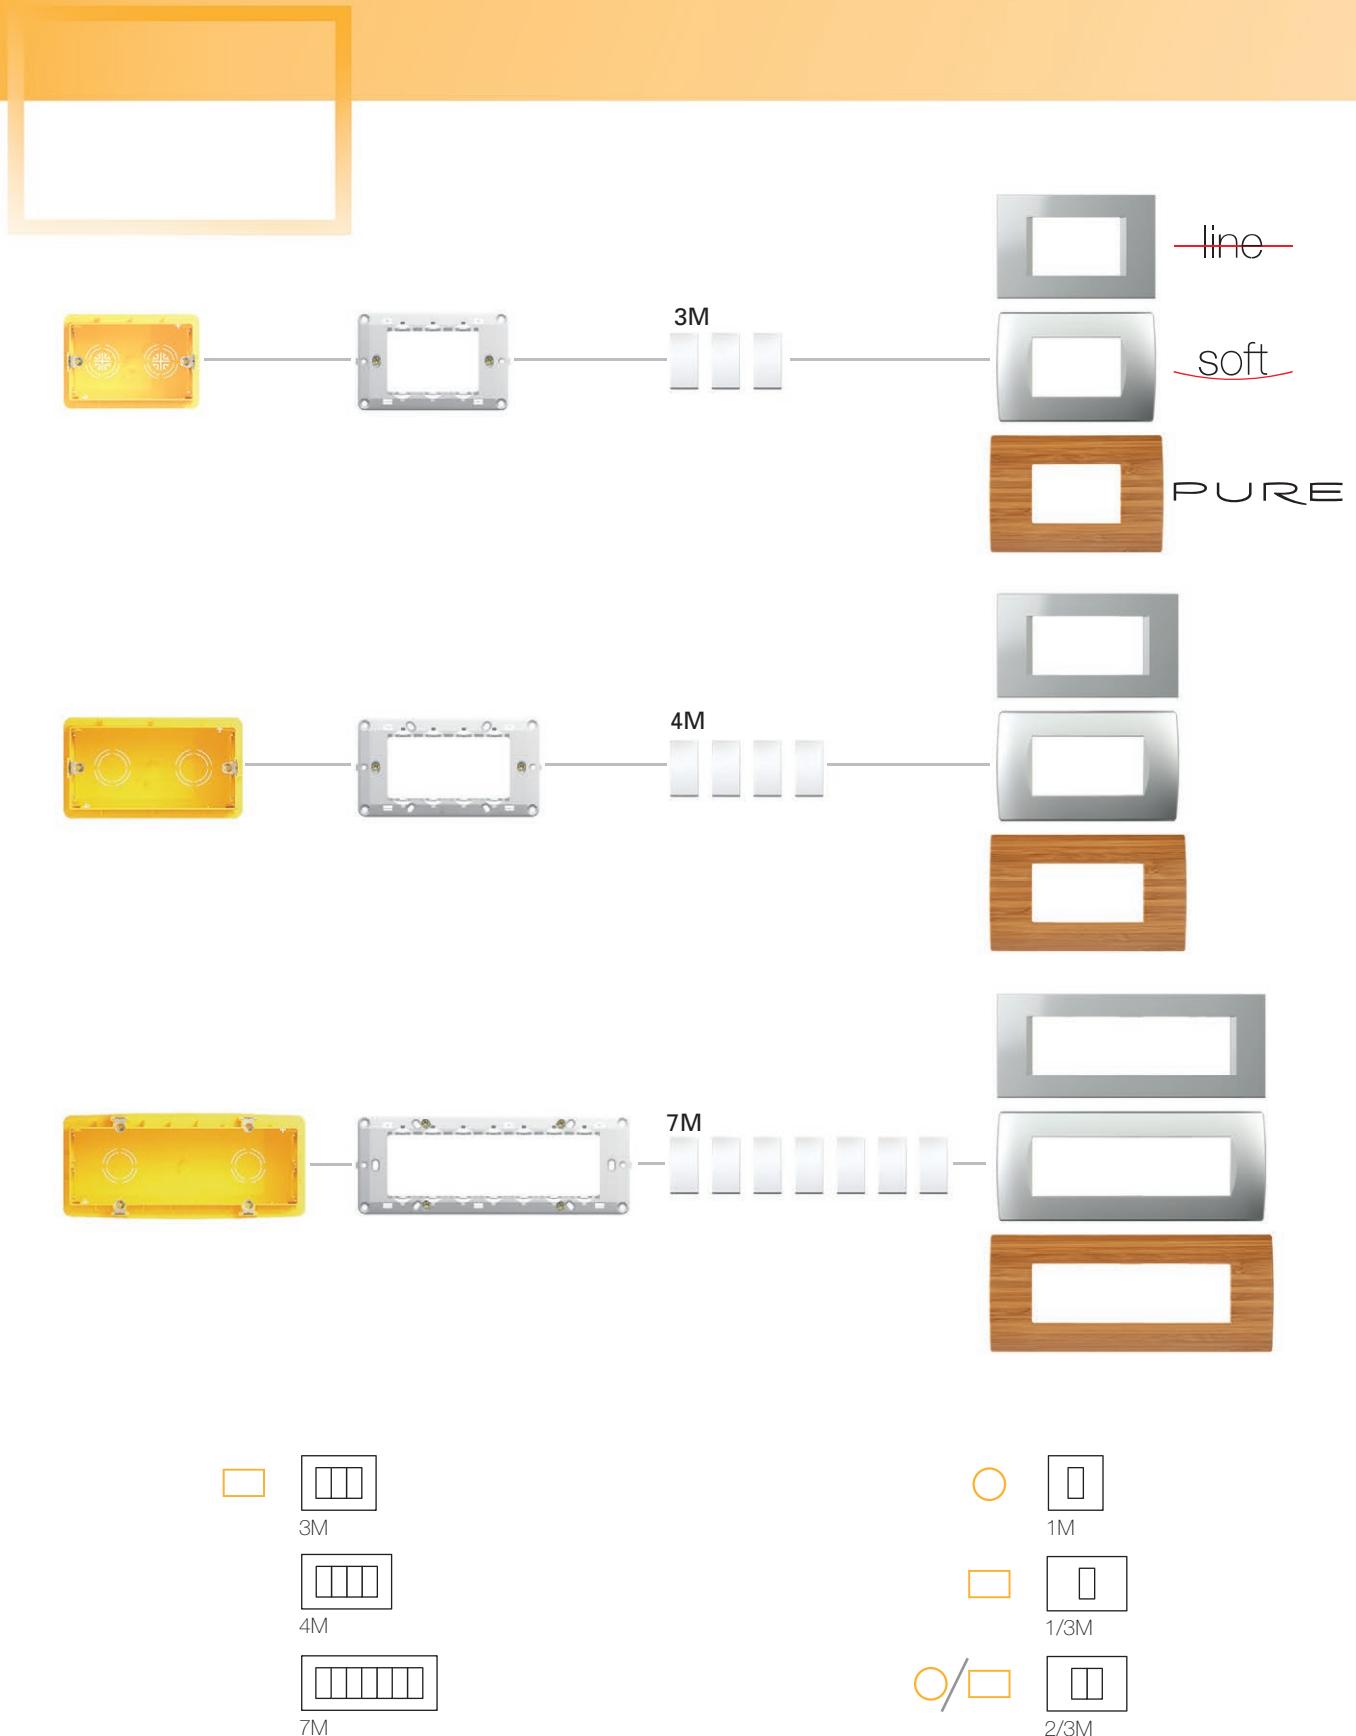

# funkcijski elementi

## function elements

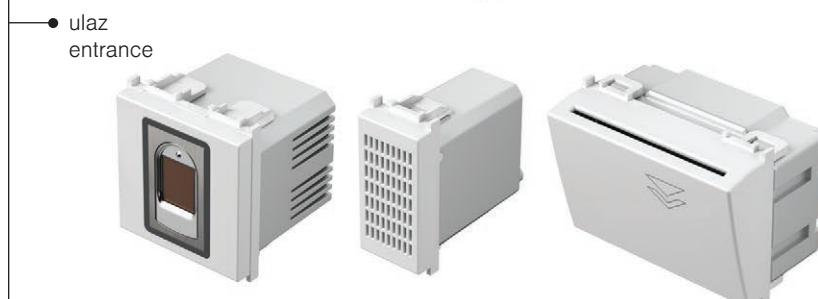

MODUL



Pouzdano spajanje kod korištenja  
žica različitih debljina.

Reliable connection even when  
different size of wires are used.



Dugotrajnost sklopki te usklađenost s  
međunarodnim standardima.

Long-life of switches and adequacy  
to the international standards.

Dizajnirali smo široku paletu funkcijskih elemenata za Modul obitelj.  
Možete ih koristiti za dizajniranje jednostavnih i složenih instalacija.

We have designed a wide selection of function element for the Modul family. You can use them to design both simple and complex installations.



Sve su uticnice opremljene sigurnosnim sklopovima koji osiguravaju zaštitu od kontakta s naponom.

All the sockets are equipped with a safety shutters assuring the protection to live contacts.



Sklopka je vrlo pouzdana zahvaljujući srebrnim zakovicama kontakata.

The switch is highly reliable via its silver rivets contacts.

# jedinstven raspon iskoristivosti

## unique range of usability

Modul Soft AW  
antibakterijsko rješenje  
antibacterial solution



M O D U L

CUBO IP20

nadžbukna kutija  
surface mounted boxes



CUBO IP55

nadžbukna kutija  
surface mounted boxes




IP44

podžbukna ugradnja  
flush mounted



Opremate li vaš dom, ured ili radionicu? Modul je prikladan kako za stambene, tako i za radne prostore te privatne i javne zgrade. Jedinstven je po tome što sklopke i utičnice mogu biti ugrađene gdje god se za to ukaže potreba.

Are you furnishing your home, office or workshop? The Modul is suitable for living as well as working spaces and both private and public buildings. It is unique in that the switches and sockets can be fitted wherever they are needed.

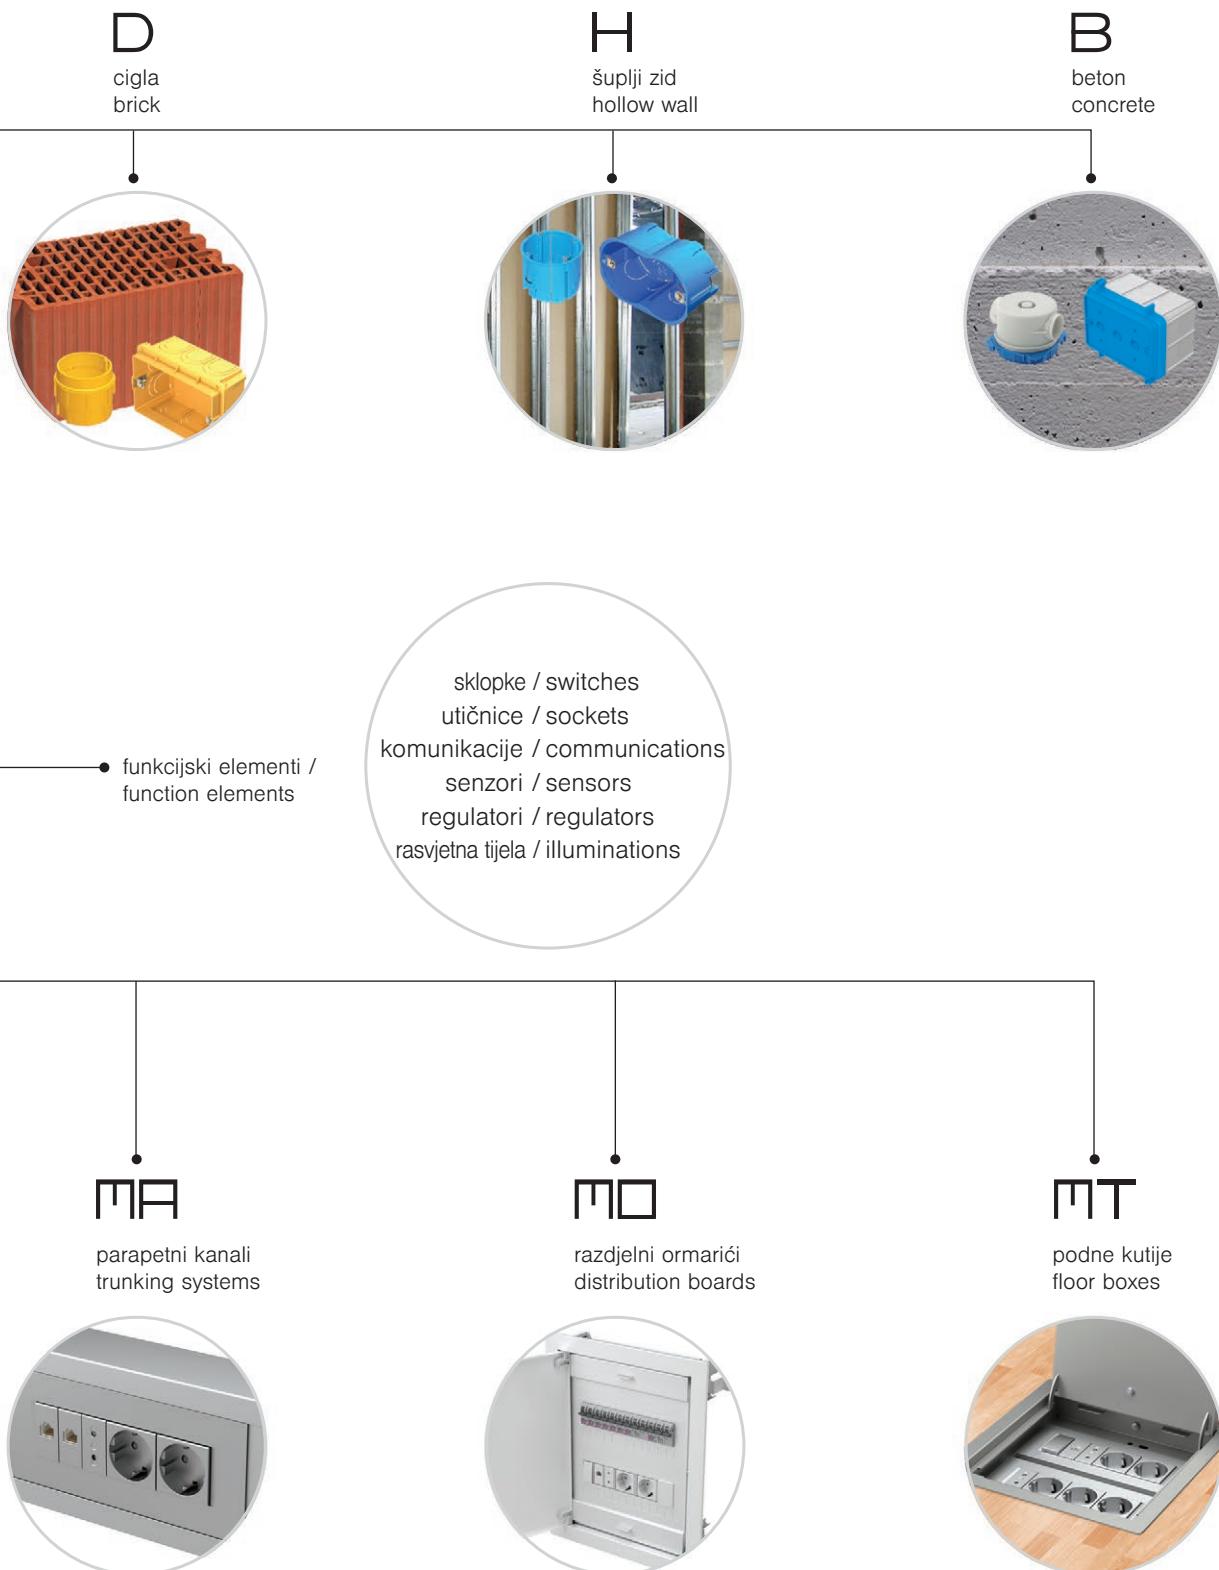


# podžbukna rješenja


## flush mounted solutions

cigla / brick

Modul je prikladan za sve vrste zidova te se može koristiti u konvencionalnim šupljim zidovima ili betonskim konstrukcijama. Jednostavno se ugrađuje i omogućuje vam kombiniranje pravokutnih ili okruglih kutija na odgovarajućoj udaljenosti. Materijali koji se koriste usklađeni su s visokim standardima.


The Modul is suitable for all wall types and can be used in conventional, hollow wall or concrete constructions. It is easy to install and enables you to combine rectangular or round boxes at the proper distances. The materials used are compliant with high standards.

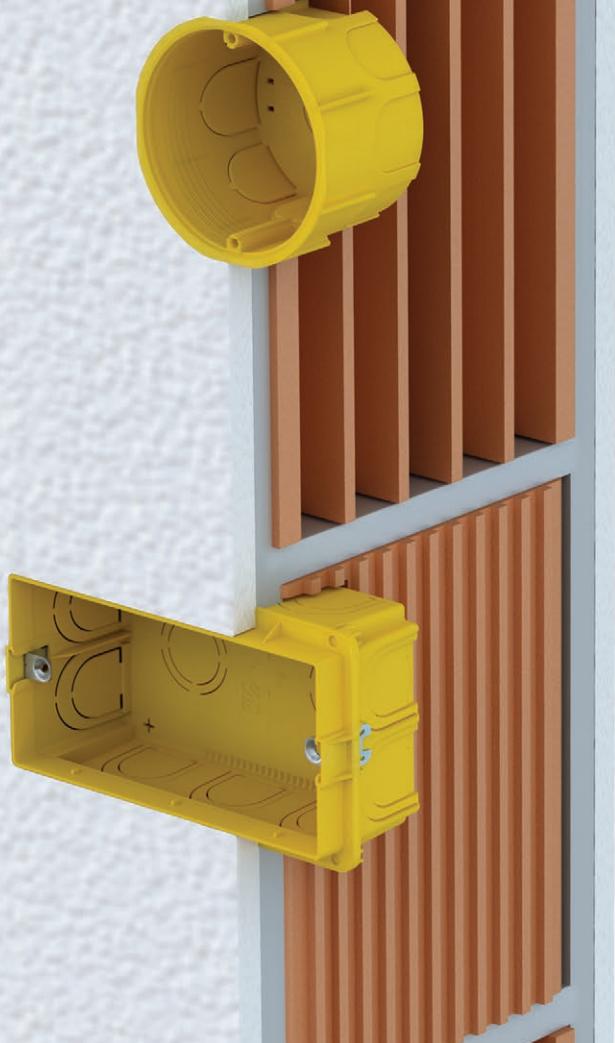

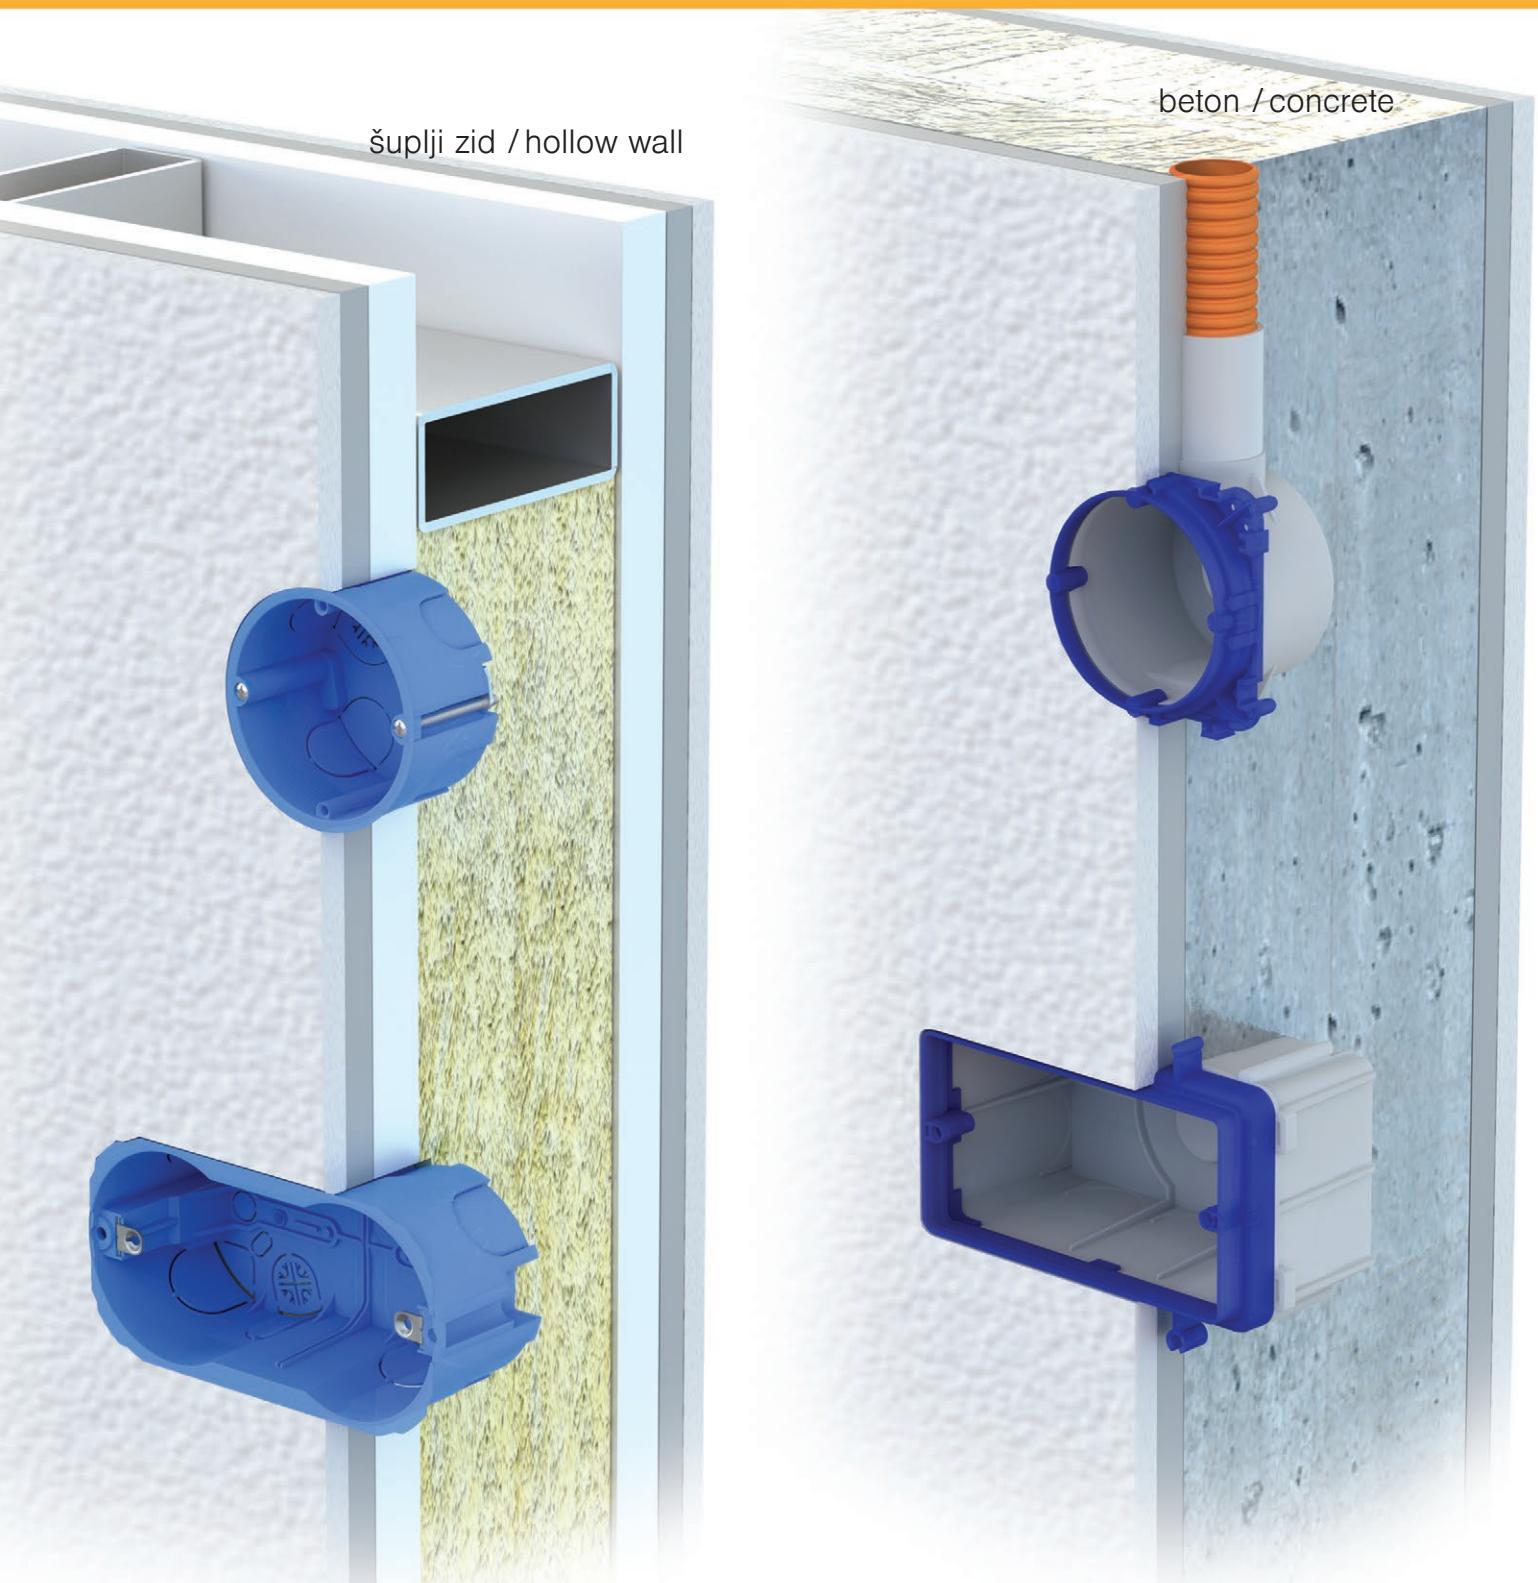

# ostala rješenja

## other solutions

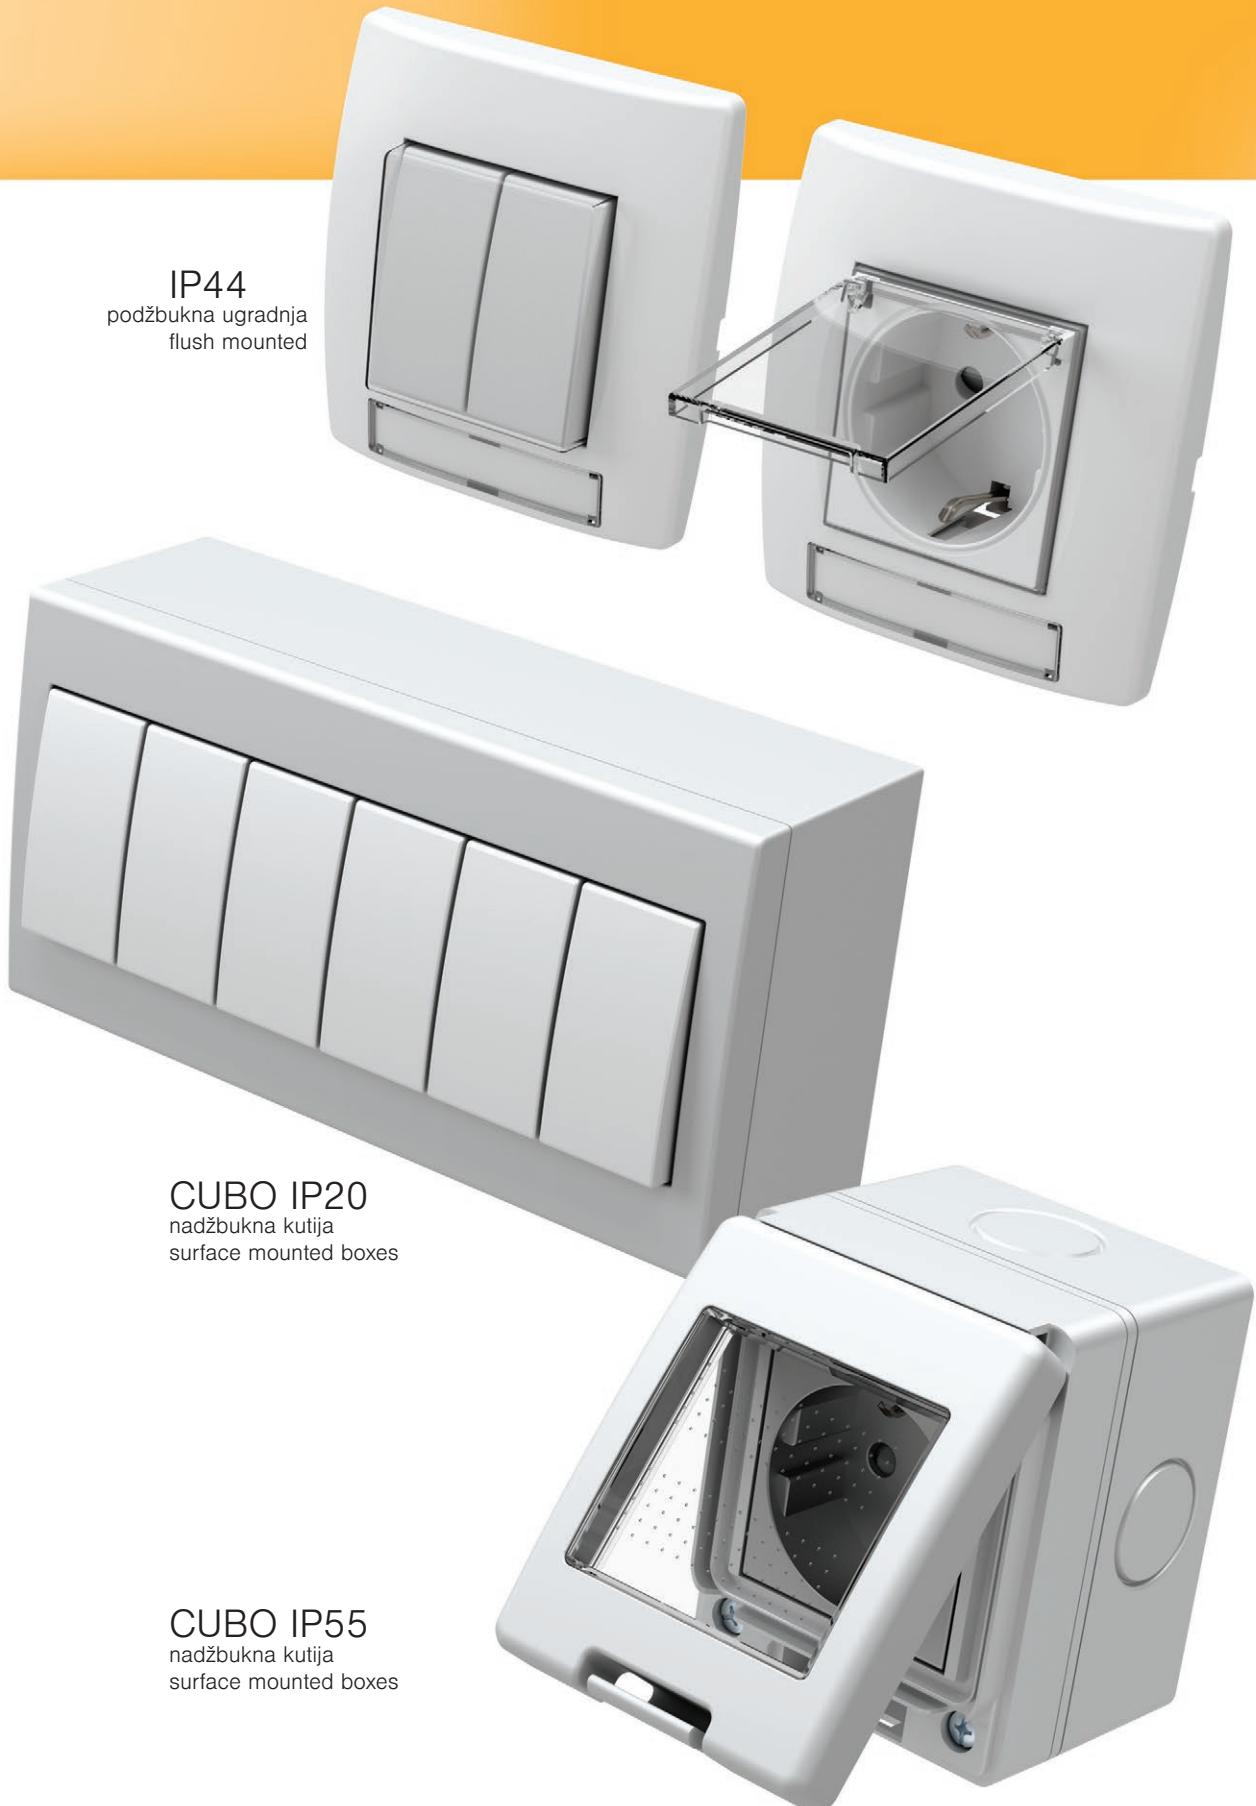

Trebate li rješenje za sklopku ili utičnicu u nadžbuknoj, podžbuknoj ili podnoj varijanti? Modul pruža različita rješenja ugradnje s razlicitim IP zaštitama, za parapetne kanale, razdjelne ormariće ili podne kutije. Odabir je na vama.

Do you need switch or socket in flush, surface or floor solution? The Modul provides different mounting solutions with different IP protections, for trunking systems, distribution boards or floor boxes. The choice is yours.



# tehnički katalog

technical catalogue



## MODUL

— funkcijski elementi  
*function elements*



66

dizajn  
*design*

PURE  
—  
line  
soft



116

kutija  
*boxes*



136

distribucija  
*distribution*



158

## Ekonomik —

## fontana —



182



210

**TEM**



KATALOG /  
CATALOGUE

# MODUL

FUNKCIJSKI ELEMENTI  
FUNCTION ELEMENTS

SKLOPKE SM  
SWITCHES SM 68



TIPKE TM  
BUTTONS TM 73



OSVJETLJENJE IA  
ILLUMINATION IA 76



UTIČNICE VM  
SOCKETS VM 78



KOMUNIKACIJE KM  
COMMUNICATIONS KM 82



DODACI KOMUNIKACIJA KA  
COMMUNICATION ACCESSORIES KA 88



ELEKTRONIKA EM  
ELECTRONICS EM 91



SETOVI CM  
SETS CM 110



ANTIBAKTERIJSKI PROGRAM AW  
ANTIBACTERIAL PROGRAM AW 115

DIZAJN  
DESIGN

OKVIRI PURE OP  
COVER PLATES PURE OP 120



OKVIRI LINE OL  
COVER PLATES LINE OL 124



OKVIRI SOFT OS  
COVER PLATES SOFT OS 128



NOSAČI NM  
MOUNTING FRAMES NM 134




tip type	naziv description	tehnički podaci technical data	veličina size	boja colour	opcijski podaci 1 optional data 1	opcijski podaci 2 optional data 2
SM10	SKLOPKA JEDNOPOLNA SWITCH 1WAY	16AX 250V~	1M	<input type="checkbox"/> PW bijela sjajna polar white	NT neutralna neutral	01
SM11	TIPKALO JEDNOPOLNO PUSH BUTTON 1WAY	16A 250V~	1M	<input checked="" type="checkbox"/> SB crna mat soft touch black		02
SM12	SKLOPKA JEDNOPOLNA SWITCH 1WAY	20A 250V~	1M	<input type="checkbox"/> AT antracit anthracite	IN indikator indicator	03
.	.	.	.	<input type="checkbox"/> ES srebrna mat elox silver		
.	.	.	.	<input type="checkbox"/> IW bež sjajna ivory white		

## SKLOPKA JEDNOPOLNA 16AX 250V~ 1M




SM10




- sklopka bez tipke
- 16AX 250V~, tip SM10
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>

## SWITCH 1WAY 16AX 250V~ 1M




SM11




- tipkalo bez tipke
- 16A 250V~, tip SM11
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>

## PUSH BUTTON 1WAY 16A 250V~ 1M




SM12




- sklopka bez tipke
- 20A 250V~, tip SM12
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>

## SWITCH 1WAY 20A 250V~ 1M




SM20



- sklopka bez tipke
- 16AX 250V~, tip SM20
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- samo u kombinaciji s tipkom TM15


## SWITCH 2POLE 16AX 250V~ 1M



## SWITCHES SM




SM40




SKLOPKA ŽALUZIJSKA 1-0-2 16AX 250V~ 1M

- sklopka bez tipke
  - 16AX 250V~, tip SM40
  - sukladno normi EN 60669-1
  - vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- SWITCH SHUTTERS 1-0-2 16AX 250V~ 1M**
- switch without button
  - 16AX 250V~, type SM40
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>




SM41




TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M

- tipkalo bez tipke
  - 16A 250V~, tip SM41
  - sukladno normi EN 60669-1
  - vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- PUSH BUTTON SHUTTERS 1-0-2 16A 250V~ 1M**
- push button without button
  - 16A 250V~, type SM41
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>




SM60




SKLOPKA IZMJENIČNA 16AX 250V~ 1M

- sklopka bez tipke
  - 16AX 250V~, tip SM60
  - sukladno normi EN 60669-1
  - vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- SWITCH 2WAY 16AX 250V~ 1M**
- switch without button
  - 16AX 250V~, type SM60
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>




SM61



TIPKALO IZMJENIČNO 16A 250V~ 1M


- tipkalo bez tipke
  - 16A 250V~, tip SM61
  - sukladno normi EN 60669-1
  - vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- PUSH BUTTON 2WAY 16A 250V~ 1M**
- push button without button
  - 16A 250V~, type SM61
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>



\* elektronika / electronics






SM70



SKLOPKA KRIŽNA 16AX 250V~ 1M

- sklopka bez tipke
  - 16AX 250V~, tip SM70
  - sukladno normi EN 60669-1
  - vičano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- SWITCH INTERMEDIATE 16AX 250V~ 1M**
- switch without button
  - 16AX 250V~, type SM70
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>

1M = 22,5 x 45  
2M = 45 x 45



PW bijela sjajna  
polar white



SB crna mat  
soft touch black



AT antracit  
anthracite



ES srebrna mat  
elox silver



IW bež sjajna  
ivory white



SM10PW  
 SM10SB  
 SM10AT  
 SM10ES  
 SM10IW

#### SKLOPKA JEDNOPOLNA 16AX 250V~ 1M

- 16AX 250V~, tip SM10
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - zamjenjiva tipka
- SWITCH 1WAY 16AX 250V~ 1M**
- 16AX 250V~, type SM10
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - replaceable button



SM10PWIN  
 SM10SBIN  
 SM10ATIN  
 SM10ESIN  
 SM10IWIN

#### SKLOPKA JEDNOPOLNA 16AX 250V~ 1M \_\_ IN

- IN indikator
  - 16AX 250V~, tip SM10
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - tijanjica nije ugrađena
  - zamjenjiva tipka
- SWITCH 1WAY 16AX 250V~ 1M \_\_ IN**
- IN indicator
  - 16AX 250V~, type SM10
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - lamp is not included
  - replaceable button



SM11PW  
 SM11SB  
 SM11AT  
 SM11ES  
 SM11IW

#### TIPKALO JEDNOPOLNO 16A 250V~ 1M

- 16A 250V~, tip SM11
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - zamjenjiva tipka
- PUSH BUTTON 1WAY 16A 250V~ 1M**
- 16A 250V~, type SM11
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - replaceable button



SM11PWIN01  
 SM11SBIN01  
 SM11ATIN01  
 SM11ESIN01  
 SM11IWIN01

#### TIPKALO JEDNOPOLNO 16A 250V~ 1M \_\_ IN 01

- indikatorsko zvono IN 01
  - 16A 250V~, tip SM11
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - tijanjica nije ugrađena
  - zamjenjiva tipka
- PUSH BUTTON 1WAY 16A 250V~ 1M \_\_ IN 01**
- IN 01 indicator bell
  - 16A 250V~, type SM11
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - lamp is not included
  - replaceable button





- SM11PWINT02
- SM11SBINT02
- SM11ATINT02
- SM11ESINT02
- SM11IWINT02

#### TIPKALO JEDNOPOLNO 16A 250V~ 1M \_\_ IN 02

- svjetlosna indikacija IN 02
- 16A 250V~, tip SM11
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- tijanjica nije ugradena
- zamjenjiva tipka



- SM20PWNT03
- SM20SBNT03
- SM20ATNT03
- SM20ESNT03
- SM20IWNT03

#### SKLOPKA DVOPOLNA 16AX 250V~ 1M \_\_ NT 03

- NT 03 neutralna 0-1
  - 16AX 250V~, tip SM20
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - zamjenjiva tipka
- SWITCH 2POLE 16AX 250V~ 1M \_\_ NT 03**
- NT 03 neutral 0-1
  - 16AX 250V~, type SM20
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - lamp is not included
  - replaceable button



- SM20PWINT02
- SM20SBINT02
- SM20ATINT02
- SM20ESINT02
- SM20IWINT02

#### SKLOPKA DVOPOLNA 16AX 250V~ 1M \_\_ IN

- IN indikator
  - 16AX 250V~, tip SM20
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - tijanjica nije ugradena
  - zamjenjiva tipka
- SWITCH 2POLE 16AX 250V~ 1M \_\_ IN**
- IN indicator
  - 16AX 250V~, type SM20
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - lamp is not included
  - replaceable button



- SM40PWNT10
- SM40SBNT10
- SM40ATNT10
- SM40ESNT10
- SM40IWNT10

#### SKLOPKA ŽALUZIJSKA 1-0-2 16AX 250V~ 1M \_\_ NT 10

- NT 10 neutralna 1-0-2
  - 16AX 250V~, tip SM40
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - zamjenjiva tipka
- SWITCH SHUTTERS 1-0-2 16AX 250V~ 1M \_\_ NT 10**
- NT 10 neutral 1-0-2
  - 16AX 250V~, type SM40
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>
  - replaceable button



- SM41PWNT10
- SM41SBNT10
- SM41ATNT10
- SM41ESNT10
- SM41IWNT10

#### TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M \_\_ NT 10

- NT 10 neutralna 1-0-2
  - 16A 250V~, tip SM41
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - zamjenjiva tipka
- PUSH BUTTON SHUTTERS 1-0-2 16A 250V~ 1M \_\_ NT 10**
- NT 10 neutral 1-0-2
  - 16A 250V~, type SM41
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5mm<sup>2</sup>
  - replaceable button



- SM60PW
- SM60SB
- SM60AT
- SM60ES
- SM60IW

#### SKLOPKA IZMJENIČNA 16AX 250V~ 1M

- 16AX 250V~, tip SM60
  - sukladno normi EN 60669-1
  - vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - zamjenjiva tipka
- SWITCH 2WAY 16AX 250V~ 1M**
- 16AX 250V~, type SM60
  - in accordance with EN 60669-1
  - screw contacts 1.5-2.5 mm<sup>2</sup>
  - replaceable button





- SM61PW
- SM61SB
- SM61AT
- SM61ES
- SM61IW

#### TIPKALO IZMJENIČNO 16A 250V~ 1M

- 16A 250V~, tip SM61
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- zamjenjiva tipka

#### PUSH BUTTON 2WAY 16A 250V~ 1M

- 16A 250V~, type SM61
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- replaceable button



- SM62PWCD
- SM62SBCD
- SM62ATCD
- SM62ESCD
- SM62IWCD

#### TIPKALO IZMJENIČNO S UZICOM 16A 250V~ 1M \_\_ CD

- CD indikator + uzica
- duljina uzice 1,5 m
- 16A 250V~, tip SM62
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>

#### PUSH BUTTON 2WAY WITH CORD 16A 250V~ 1M \_\_ CD

- CD indicator+cord
- cord length 1.5m
- 16A 250V~, type SM62
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>



- SM70PW
- SM70SB
- SM70AT
- SM70ES
- SM70IW

#### SKLOPKA KRIŽNA 16AX 250V~ 1M


- 16AX 250V~, tip SM70
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- zamjenjiva tipka

#### SWITCH INTERMEDIATE 16AX 250V~ 1M


- 16AX 250V~, type SM70
- in accordance with EN 60669-1
- screw contacts 1.5-2.5 mm<sup>2</sup>
- replaceable button



1M = 22,5 x 45  
2M = 45 x 45



## BUTTONS TM



03


TM11

PW

NT

tip type	naziv description	veličina size	boja colour	opcijski podaci 1 optional data 1	opcijski podaci 2 optional data 2
TM11	TIPKA BUTTON	1M	<input type="checkbox"/> PW bijela sjajna polar white	NT neutralna neutral	 01
TM12	TIPKA BUTTON	2M	<input checked="" type="checkbox"/> SB crna mat soft touch black	 IN indikator indicator	 02
TM21	SLIJEPI ELEMENT BLANK	1M	<input checked="" type="checkbox"/> AT antracit anthracite		 03
			<input type="checkbox"/> ES srebrna mat elox silver		
			<input type="checkbox"/> IW bež sjajna ivory white		

## TIPKA 1M

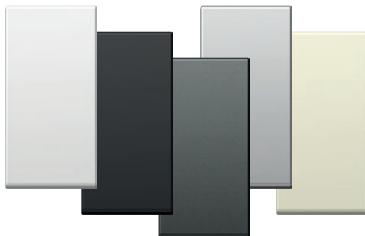

- TM11PW
- TM11SB
- TM11AT
- TM11ES
- TM11IW

- zamjenjiva tipka 1M  
- sukladno normi EN 60669-1

## BUTTON 1M

- replaceable button 1M  
- in accordance with EN 60669-1




- TM11PWIN
- TM11ATIN
- TM11SBIN
- TM11ESIN
- TM11IWIN

- zamjenjiva tipka 1M  
- sukladno normi EN 60669-1

## BUTTON 1M INDIKATOR

- replaceable button 1M  
- in accordance with EN 60669-1

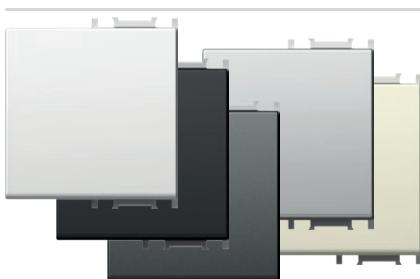


- TM12PW
- TM12SB
- TM12AT
- TM12ES
- TM12IW

- zamjenjiva tipka 2M s nosačem tipke  
- za nadogradnju sklopke ili tipke s veličine 1M na veličinu 2M.  
- sukladno normi EN 60669-1

## BUTTON 2M

- replaceable button 2M with button carrier  
- to upgrade switch or push button from size 1M to size 2M  
- in accordance with EN 60669-1

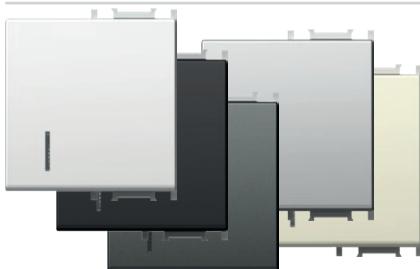


- TM12PWIN
- TM12SBIN
- TM12ATIN
- TM12ESIN
- TM12IWIN

- zamjenjiva tipka 2M s nosačem tipke  
- za nadogradnju sklopke ili tipke s veličine 1M na veličinu 2M.  
- sukladno normi EN 60669-1

## BUTTON 2M INDIKATOR

- replaceable button 2M with button carrier  
- to upgrade switch or push button from size 1M to size 2M  
- in accordance with EN 60669-1



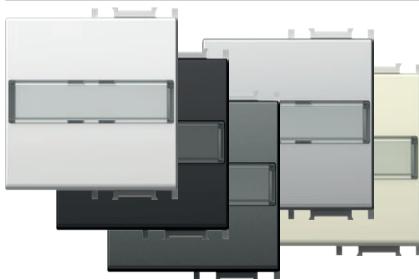


- TM13PWIL
- TM13SBIL
- TM13ATIL
- TM13ESIL
- TM13IWIL

#### TIPKA 2M S NATPISNOM PLOČICOM

- zamjenjiva tipka 2M s nosačem tipke
- upotrebljava se pri nadogradnji sklopke ili tipkala od veličine 1M na veličinu 2M
- sukladno normi EN 60669-1

#### BUTTON 2M WITH INSCRIPTION PLATE

- replaceable button 2M with button carrier
- to upgrade switch or push button from size 1M to size 2M
- in accordance with EN 60669-1

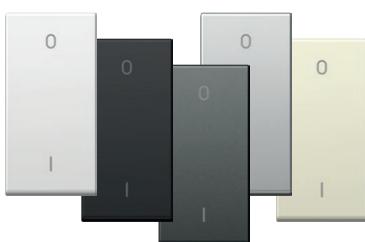


- TM15PW
- TM15SB
- TM15AT
- TM15ES
- TM15IW

#### TIPKA 1M DVOPOLNA

- zamjenjiva tipka 1M
- samo u kombinaciji s mehanizmom SM20
- sukladno normi EN 60669-1

#### BUTTON 1M 2POLE


- replaceable button 1M
- only in combination with mechanism SM20
- in accordance with EN 60669-1

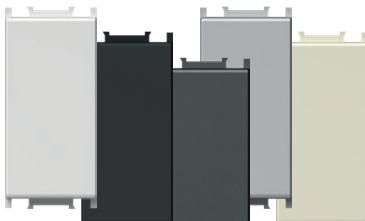

- TM21PW
- TM21SB
- TM21AT
- TM21ES
- TM21IW

#### SLIJEPI ELEMENT 1M

- slijepi element za popunjavanje praznog mesta
- sukladno normi EN 60669-1

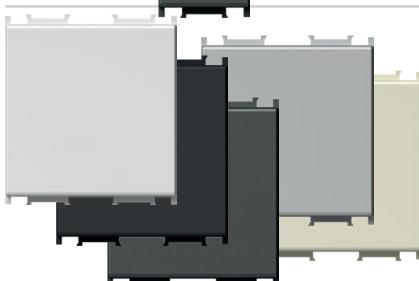


- TM22PW
- TM22SB
- TM22AT
- TM22ES
- TM22IW

#### SLIJEPI ELEMENT 2M

- slijepi element za popunjavanje praznog mesta
- sukladno normi EN 60669-1

#### BLANK 2M

- blank modul to fill up empty spaces
- in accordance with EN 60669-1

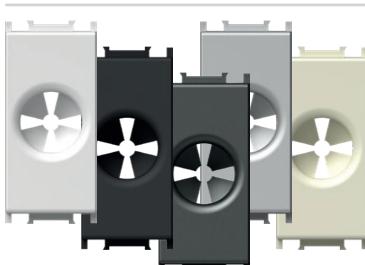

- TM31PW
- TM31SB
- TM31AT
- TM31ES
- TM31IW

#### UVODNICA 1M


- uvodnica za kabel
- sukladno normi EN-60669-1

#### CABLE OUTLET 1M


- outlet for cable
- in accordance with EN-60669-1




1M = 22,5 x 45  
2M = 45 x 45




TM11  
TM15




TM12  
TM13




TM21



TM22



TM31

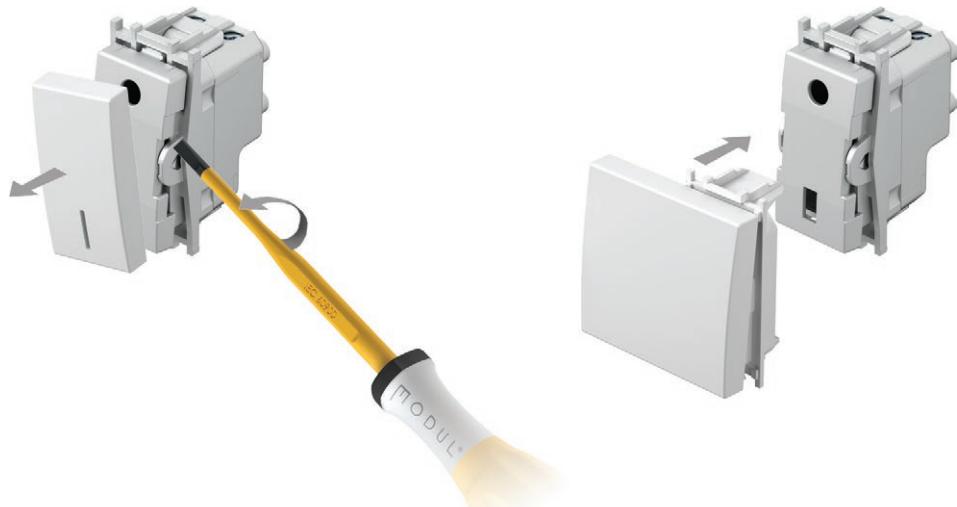

## LASERSKO GRAVIRANJE NA TIPKAMA

- lasersko graviranje proizvoljne grafike na označenome mjestu
- standardni simboli dostupni sa skladišta, ostali na zahtjev

## LASER PRINT ON BUTTONS


- laser print of any graphics on marked locations
- standard symbols from stock, other on request

1M

A
B
C

2M

A	D	G
B	E	H
C	F	I




## SIMBOLI


## SYMBOLS

01	02	03	04	05	06	07	08	09	10	11	12	20	21	22	23
!	!	0	0	!	!	!	!	!	^	^	^	+	-	!	!
24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39
!	!	!	!	A	OFF	ON	+	!	!	!	AC	!	!	!	!
40	41	42	43	44	45	46	47	48							
!	!	!	!	!	!	!	!	!							

## STANDARDNI SIMBOLI

## STANDARD SYMBOLS

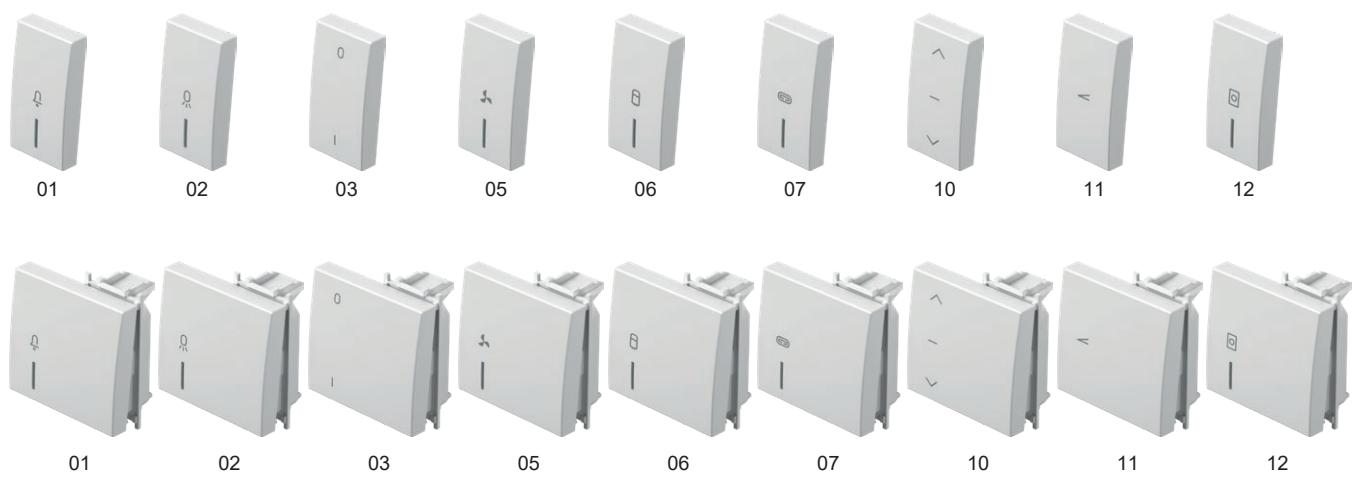

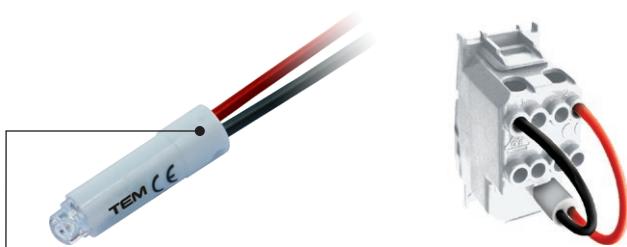

IA20

WH

tip type	naziv description	tehnicički podaci technical data	boja colour
IA10	NEONSKA TINJALICA NEON LAMP	230V~ 0,34W	<input type="checkbox"/> WH bijela white
IA20	LED TINJALICA LED LAMP	230V~ AC/DC 0,40W	<input checked="" type="checkbox"/> BL plava blue
IA21	LED TINJALICA LED LAMP	24V AC/DC 0,20W	<input checked="" type="checkbox"/> RD crvena red
.	.	.	<input checked="" type="checkbox"/> GR zelena green
.	.	.	<input checked="" type="checkbox"/> OR narančasta orange

**NEONSKA TINJALICA 230V~ 0,34W** IA10OR

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**NEON LAMP 230V~ 0,34W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator

 IA20WH  
 IA20GR  
 IA20RD  
 IA20BL
**LED TINJALICA 230V AC/DC 0,40W**

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**LED LAMP 230V AC/DC 0,40W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator

 IA21WH  
 IA21RD
**LED TINJALICA 24V AC/DC 0,20W**

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**LED LAMP 24V AC/DC 0,20W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator

 IA22WH  
 IA22RD
**LED TINJALICA 12V AC/DC 0,10W**

- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke
- u kombinaciji s tipkom s indikatorom

**LED LAMP 12V AC/DC 0,10W**

- for indication, illumination or constant illumination of switch
- in combination with button with indicator




IA50

- RC sklop za uklanjanje smetnji pri radu LED svjetiljki  
 - moguće je usporedno povezati više RC sklopova sa svjetiljkama  
 - 0,1 µF, 100 Ω, 250V~

**RC CIRCUIT 250V~**

- RC circuit to eliminate disturbances in the operation of LED lamps
- parallel connections of more RC circuits with lamps are possible
- 0,1 µF, 100 Ω, 250V~














## ILLUMINATION IA

\* Indikacija /  
Indication


Rasvjetna tijela /  
Illumination


Stalno osvjetljenje /  
Constant illumination

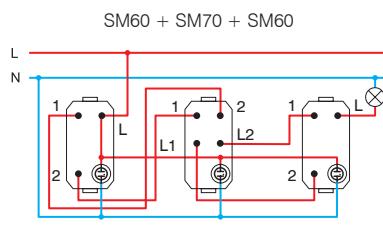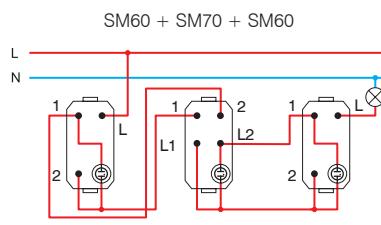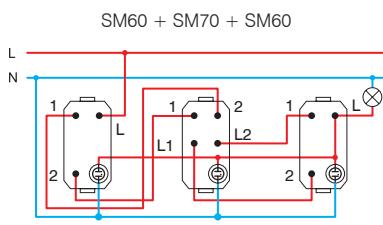

\* spojne shema kompaktne fluorescentne tinjalice (CFL, LED) /  
wiring scheme for energy saving lamps (CFL, LED)

1M = 22,5 x 45  
2M = 45 x 45




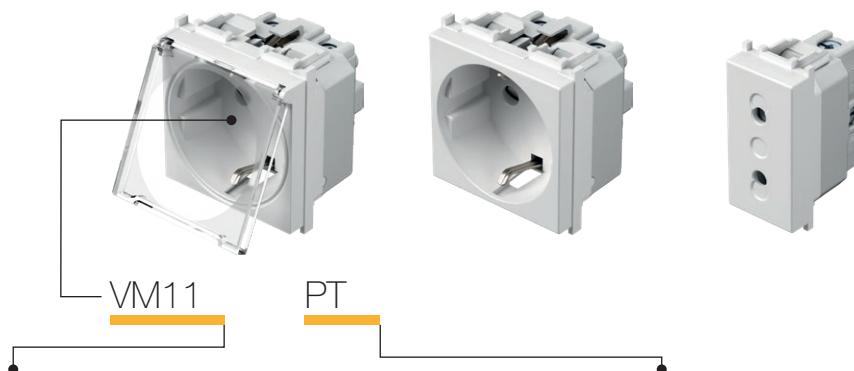

tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
VM10	UTIČNICA ŠUKO+KS SOCKET SCHUKO+KS	2P+E 16A 250V~ 2M		<input type="checkbox"/> PW bijela sjajna polar white <input checked="" type="checkbox"/> PT bijela+prozirna white+transparent <input type="checkbox"/> PP bijela+bijela white+white
VM11	UTIČNICA ŠUKO+KS+POKLOPAC SOCKET SCHUKO+KS+COVER	2P+E 16A 250V~ 2M		<input checked="" type="checkbox"/> SB crna mat soft touch black <input checked="" type="checkbox"/> BT crna+prozirna soft touch black+transparent <input checked="" type="checkbox"/> BB crna+crna soft touch black+black
VM20	UTIČNICA EURO+KS SOCKET EURO+KS	2P 10A 250V~ 1M		<input checked="" type="checkbox"/> AT antracit anthracite <input checked="" type="checkbox"/> AT antracit+prozirna anthracite+transparent <input checked="" type="checkbox"/> AA antracit+antracit anthracite+anthracite
.	.	.		<input checked="" type="checkbox"/> ES srebrna mat elox silver <input checked="" type="checkbox"/> ST srebrna+prozirna silver+transparent <input checked="" type="checkbox"/> SS srebrna+srebrna silver+silver
.	.	.		<input checked="" type="checkbox"/> IW bež sjajna ivory white <input checked="" type="checkbox"/> IT bež+prozirna ivory+transparent <input checked="" type="checkbox"/> II bež+bež ivory+ivory
.	.	.		<input checked="" type="checkbox"/> RD crvena red <input checked="" type="checkbox"/> RT crvena+prozirna red+transparent <input checked="" type="checkbox"/> RR crvena+crvena red+red
.	.	.		<input checked="" type="checkbox"/> GR zelena green <input checked="" type="checkbox"/> GT zelena+prozirna green+transparent <input checked="" type="checkbox"/> GG zelena+zelena green+green
.	.	.		<input checked="" type="checkbox"/> OR narančasta orange <input checked="" type="checkbox"/> OT narančasta+prozirna orange+transparent <input checked="" type="checkbox"/> OO narančasta+narančasta orange+orange



## UTIČNICA ŠUKO+KS 2P+E 16A 250V~ 2M

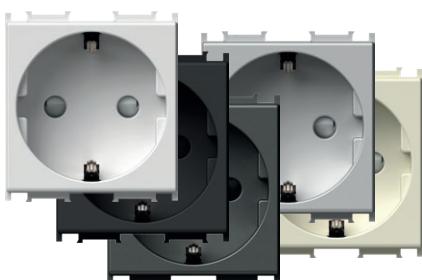


- VM10PW
- VM10SB
- VM10AT
- VM10ES
- VM10IW

- 2P+E šuko  
- 16A 250V~, tip VM10  
- sukladno normama IEC 60884-1, CEE7  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- utičnica s integriranim zaštitom



## SOCKET SCHUKO+KS 2P+E 16A 250V~ 2M

- 2P+E schuko  
- 16A 250V~, type VM10  
- in accordance with IEC 60884-1, CEE7  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- shuttered live contacts



- VM10RD
- VM10GR
- VM10OR

- 2P+E šuko  
- 16A 250V~, tip VM10  
- sukladno normama IEC 60884-1, CEE7  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- utičnica s integriranim zaštitom



## UTIČNICA ŠUKO+KS 2P+E 16A 250V~ 2M

- 2P+E schuko  
- 16A 250V~, type VM10  
- in accordance with IEC 60884-1, CEE7  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- shuttered live contacts



- VM11PT
- VM11BT
- VM11AT
- VM11ST
- VM11IT
- VM11PP


- 2P+E šuko + poklopac  
- 16A 250V~, tip VM11  
- sukladno normama IEC 60884-1, CEE7  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- utičnica s integriranim zaštitom



## SOCKET SCHUKO+KS+COVER 2P+E 16A 250V~ 2M

- 2P+E schuko+cover  
- 16A 250V~, type VM11  
- in accordance with IEC 60884-1, CEE7  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- shuttered live contacts

## S O C K E T S V M

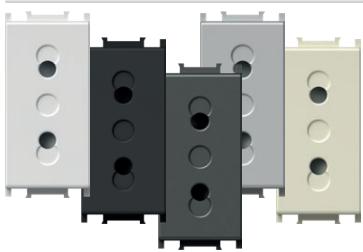

- VM20PW
- VM20SB
- VM20AT
- VM20ES
- VM20IW

## UTIČNICA EURO+KS 2P 10A 250V~ 1M


- 2P Euro
- 10A 250V~, tip VM20
- sukladno normama IEC 60884-1, CEE7
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom



- VM40PW
- VM40SB
- VM40AT
- VM40ES
- VM40IW

## UTIČNICA FRANCUSKA+KS 2P+E 16A 250V~ 2M

- 2P+E francuska
- 16A 250V~, tip VM40
- sukladno normama IEC 60884-1, NF C 61-314 CEE7
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom



- VM40RD
- VM40GR
- VM40OR

## UTIČNICA FRANCUSKA+KS 2P+E 16A 250V~ 2M

- 2P+E francuska
- 16A 250V~, tip VM40
- sukladno normama IEC 60884-1, NF C 61-314 CEE7
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom



- VM41PT
- VM41BT
- VM41AT
- VM41ST
- VM41IT

## UTIČNICA FRANCUSKA+KS+POKLOPAC 2P+E 16A 250V~ 2M


- 2P+E francuska+poklopac
- 16A 250V~, tip VM41
- sukladno normama IEC 60884-1, NF C 61-314 CEE7
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom



- VM30PW
- VM30SB
- VM30AT
- VM30ES
- VM30IW

## UTIČNICA TALIJANSKA P17/11+KS 2P+E 16A 250V~ 1M

- 2P+E talijanska P17/11
- 16A 250V~, tip VM30
- sukladno normama IEC 60884-1, CEI 23-50
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom

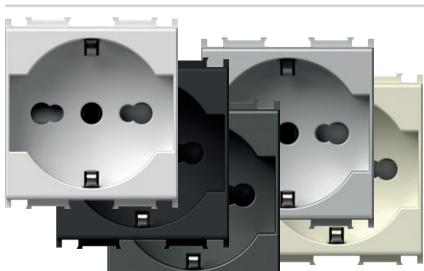


- VM31PW
- VM31SB
- VM31AT
- VM31ES
- VM31IW

## UTIČNICA ŠUKO TALIJANSKA P17/11+KS 2P+E 16A 250V~ 2M

- 2P+E šuko/talijanska P17/11
- 16A 250V~, tip VM31
- sukladno normama IEC 60884-1, CEI 23-50
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom



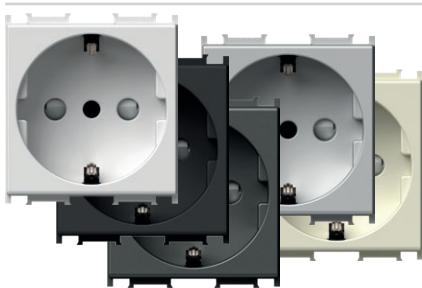

- VM32PW
- VM32SB
- VM32AT
- VM32ES
- VM32IW


#### UTIČNICA ŠUKO TALIJANSKA P30+KS 2P+E 16A 250V~ 2M

- 2P+E šuko/talijanska P30
- 16A 250V~, tip VM32
- sukladno normama IEC 60884-1, CEI 23-50
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom



#### SOCKET SCHUKO/ITA P30+KS 2P+E 16A 250V~ 2M

- 2P+E schuko/Italian P30
- 16A 250V~, type VM32
- in accordance with IEC 60884-1, CEI 23-50
- screw contacts 1,5-2,5 mm<sup>2</sup>
- shuttered live contacts

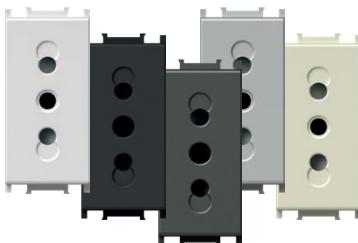

- VM33PW
- VM33SB
- VM33AT
- VM33ES
- VM33IW

#### UTIČNICA TALIJANSKA P11+KS 2P+E 10A 250V~ 1M

- 2P+E talijanska P11
- 10A 250V~, tip VM33
- sukladno normama IEC 60884-1, CEI 23-50
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom



#### SOCKET ITALIAN P11+KS 2P+E 10A 250V~ 1M

- 2P+E Italian P11
- 10A 250V~, type VM33
- in accordance with IEC 60884-1, CEI 23-50
- screw contacts 1,5-2,5 mm<sup>2</sup>
- shuttered live contacts



- VM21PW
- VM21SB
- VM21AT
- VM21ES
- VM21IW


#### UTIČNICA EURO/AMERIČKA+KS 2P 16A 250V~ 1M

- 2P euro/američka
- 16A 250V~, tip VM21
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom
- samo za zemlje koje nisu članice EU-a



#### SOCKET EURO/AMERICAN+KS 2P 16A 250V~ 1M

- 2P Euro/American
- 16A 250V~, type VM21
- screw contacts 1,5-2,5 mm<sup>2</sup>
- shuttered live contacts
- only for countries not members of EU

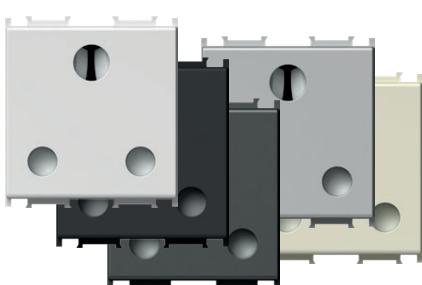

- VM51PW
- VM51SB
- VM51AT
- VM51ES
- VM51IW


#### UTIČNICA BRITANSKA BS 546+KS 2P+E 15A 250V~ 2M

- 2P+E britanska BS 546
- 15A 250V~, tip VM51
- sukladno normi BS 546
- vijčano pričvršćivanje vodiča presjeka 1,5-4 mm<sup>2</sup>
- utičnica s integriranim zaštitom



#### SOCKET BRITISH BS 546+KS 2P+E 15A 250V~ 2M

- 2P+E British BS 546
- 15A 250V~, type VM51
- in accordance with BS 546
- screw contacts 1,5-4 mm<sup>2</sup>
- shuttered live contacts

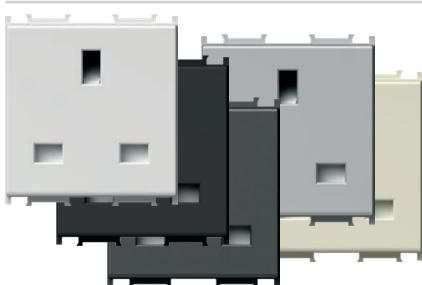

- VM52PW
- VM52SB
- VM52AT
- VM52ES
- VM52IW

#### UTIČNICA BRITANSKA BS 1363-2+KS 2P+E 13A 250V~ 2M

- 2P+E britanska BS 1363-2
- 13A 250V~, tip VM52
- sukladno normi BS 1363-2
- vijčano pričvršćivanje vodiča presjeka 1,5-4 mm<sup>2</sup>
- utičnica s integriranim zaštitom



#### SOCKET BRITISH BS 1363-2+KS 2P+E 13A 250V~ 2M

- 2P+E British BS 1363-2
- 13A 250V~, type VM52
- in accordance with BS 1363-2
- screw contacts 1,5-4 mm<sup>2</sup>
- shuttered live contacts




VM80

- paralelni spoj s prvom utičnicom u nizu
- razred zaštite III
- $U_c = 275\text{ Vac}$ ,  $U_{oc}/I_{sc} = 6\text{kV}/3\text{kA}$ ,  $Up < 800\text{ V}$
- sukladno normi IEC 61643-1
- vodiči presjeka 1,5 mm<sup>2</sup>, IP20
- zvučni signal u slučaju probroja

#### SURGE PROTECTOR MPE MINI 275V/50Hz

- parallel connection with the first socket in the row
- protection class III
- $U_c=275\text{ Vac}$ ,  $U_{oc}/I_{sc}=6\text{kV}/3\text{kA}$ ,  $Up<800\text{ V}$
- in accordance with IEC 61643-1
- wires 1.5mm<sup>2</sup>, IP20
- sound signal at breakdown



## S O C K E T S V M


POVEZIVANJE UTIČNICA I UTIKAČA  
SOCKETS AND PLUGS MATCHING

	UTIČNICA / SOCKET	VM10 VM11	VM20	VM30	VM33	VM31	VM32	VM40 VM41	VM21
VRSTA UTIKAČA / PLUG STYLE									
Njemački / German	 	•				•	•		
Francuski / French	 	•				•	•	•	
Talijanski / Italian S11	 			•	•	•	•		
Talijanski / Italian S17	 			•		•			
euro	 	•	•	•		•	•	•	•

POVEZIVANJE UTIČNICA I UTIKAČA  
SOCKETS AND PLUGS MATCHING

	UTIČNICA / SOCKET	VM21	VM51	VM52
VRSTA UTIKAČA / PLUG STYLE				
Američki / American	 	•		
Britanski / British BS 546	 		•	
Britanski / British BS 1363-2	 			•

1M = 22,5 x 45  
2M = 45 x 45

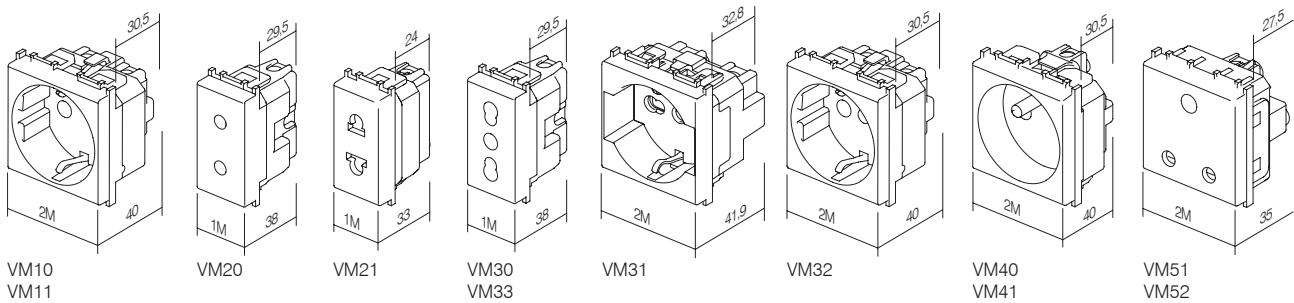



KM10



PW



tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
KM10	UTIČNICA TV OSNOVNA SOCKET TV BASIC	0dB	1M	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
KM11	UTIČNICA TV ZAVRŠNA SOCKET TV END-LINE	1dB	1M	<input checked="" type="checkbox"/> SB crna mat <i>soft touch black</i>
KM12	UTIČNICA TV PROLAZNA SOCKET TV TROUGHPASS	10dB	1M	<input checked="" type="checkbox"/> AT antracit <i>anthracite</i>
.	.	.	.	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	.	<input type="checkbox"/> IW bež sjajna <i>ivory white</i>

## UTIČNICA TV OSNOVNA 0dB 1M



- KM10PW
- KM10SB
- KM10AT
- KM10ES
- KM10IW

- TV osnovna  
- prigušenje 0dB  
- stražnji konektor – F standard  
**SOCKET TV BASIC 0dB 1M**  
- TV basic  
- reduction 0dB  
- back connector – F standard



- KM20PW
- KM20SB
- KM20AT
- KM20ES
- KM20IW

- TV osnovna  
- prigušenje 0dB  
- stražnji konektor – F standard  
**SOCKET TV BASIC 0dB 2M**  
- TV basic  
- reduction 0dB  
- back connector – F standard



- KM11PW
- KM11SB
- KM11AT
- KM11ES
- KM11IW

Ad: 1dB  
24V 500 mA max  
IEC 60169-2 male

## UTIČNICA TV ZAVRŠNA 1dB 1M

- TV završna  
- propušta frekvenciju u rasponu 5÷2400 MHz  
- prigušenje < 1 dB  
- sukladno normi EN 50083-1  
- vijčano pričvršćivanje vodiča

## SOCKET TV END-LINE 1dB 1M

- TV end-line  
- frequency range 5÷2400 MHz  
- reduction < 1 dB  
- in accordance with EN 50083-1  
- screw contacts



- KM12PW
- KM12SB
- KM12AT
- KM12ES
- KM12IW

Ad: 10dB  
IEC 60169-2 male

## UTIČNICA TV PROLAZNA 10dB 1M

- TV prolazna  
- propušta frekvenciju u rasponu 5÷2400 MHz  
- prigušenje < 10 dB  
- sukladno normi EN 50083-1  
- vijčano pričvršćivanje vodiča

## SOCKET TV TROUGHPASS 10dB 1M

- TV throughpass  
- frequency range 5÷2400 MHz  
- reduction < 10 dB  
- in accordance with EN 50083-1  
- screw contacts






- KM15PW
- KM15SB
- KM15AT
- KM15ES
- KM15IW

#### UTIČNICA SAT OSNOVNA 0dB 1M

- SAT osnovna
  - prigušenje 0dB
  - stražnji konektor – F standard
- SOCKET SAT BASIC 0dB 1M**
- SAT basic
  - reduction 0dB
  - back connector – F standard

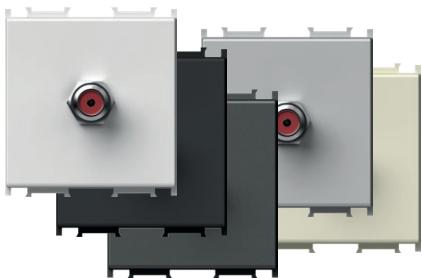

- KM24PW
- KM24SB
- KM24AT
- KM24ES
- KM24IW

#### UTIČNICA SAT OSNOVNA 0dB 2M

- SAT osnovna
  - prigušenje 0dB
  - stražnji konektor – F standard
- SOCKET SAT BASIC 0dB 2M**
- SAT basic
  - reduction 0dB
  - back connector – F standard



- KM16PW
  - KM16SB
  - KM16AT
  - KM16ES
  - KM16IW
- Ad: 1dB  
24V 500 mA max  
IEC 60169-2 male

#### UTIČNICA SAT ZAVRŠNA 1dB 1M


- SAT završna
  - propušta frekvenciju u rasponu 5÷2400 MHz
  - prigušenje < 1dB
  - sukladno normi EN 50083-1
  - vijčano pričvršćivanje vodiča
- SOCKET SAT END-LINE 1dB 1M**
- SAT end-line
  - frequency range 5÷2400 MHz
  - reduction < 1dB
  - in accordance with EN 50083-1
  - screw contacts



- KM19PW
- KM19SB
- KM19AT
- KM19ES
- KM19IW

#### UTIČNICA R OSNOVNA 0dB 1M


- R OSNOVNA
  - prigušenje 0dB
  - stražnji konektor – F standard
- SOCKET R BASIC 0dB 1M**
- R basic
  - reduction 0dB
  - back connector – F standard

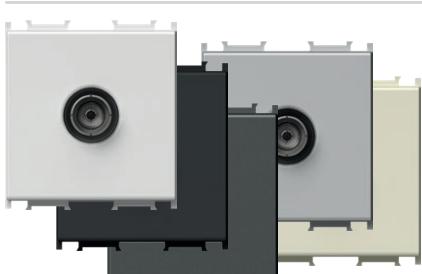

- KM29PW
- KM29SB
- KM29AT
- KM29ES
- KM29IW

#### UTIČNICA R OSNOVNA 0dB 2M


- R osnovna
  - prigušenje 0dB
  - stražnji konektor – F standard
- SOCKET R BASIC 0dB 2M**
- R basic
  - reduction 0dB
  - back connector – F standard

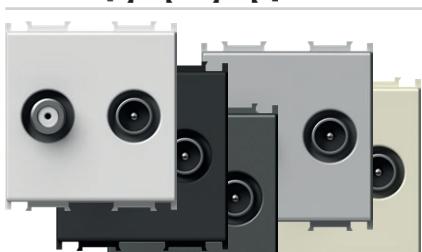

- KM25PW
- KM25SB
- KM25AT
- KM25ES
- KM25IW


#### UTIČNICA SAT-TV ZAVRŠNA 1db 2M

- SAT-TV završna
  - propušta frekvenciju u rasponu 5÷2400 MHz
  - prigušenje < 1dB
  - sukladno normi EN 50083-1
  - vijčano pričvršćivanje vodiča
- SOCKET SAT-TV END-LINE 1db 2M**
- SAT-TV end-line
  - frequency range 5÷2400 MHz
  - reduction < 1dB
  - in accordance with EN 50083-1
  - screw contacts




**PRIMJERI OSNOVNOG SPOJA**  
BASIC CONNECTION SAMPLES

pojedinačni spoj  
stand alone connection




KM10  
KM20  
KM11  
KM15  
KM24  
KM16  
KM19  
KM29  
KM25

zvjezdasti spoj  
star connection



KM10  
KM20  
KM11  
KM15  
KM24  
KM16  
KM19  
KM29  
KM25

prolazni spoj  
throughpass connection



KM12      KM11

**UTIČNICA AUDIO 2xRCA 1M**

- KM22PW
- KM22SB
- KM22AT
- KM22ES
- KM22IW



- SOCKET AUDIO 2xRCA 1M**
- audio 2x RCA
  - lemljenje spojeva kabela na stražnjoj strani
- SOCKET AUDIO 2xRCA**
- audio 2x RCA
  - soldering connection of cable at the back side



**UTIČNICA AUDIO ZVUČNICI 1M**

- KM23PW
- KM23SB
- KM23AT
- KM23ES
- KM23IW



- SOCKET AUDIO LOUDSPEAKERS 1M**
- audio 2x Ø4 mm
  - pričvršćivanje vodiča za zvučnike umetanjem ili banana utikačem Ø4 mm
  - lemljenje spojeva kabela na stražnjoj strani
- SOCKET AUDIO LOUDSPEAKERS**
- audio 2x Ø4mm
  - to accommodate speaker wire, banana plug Ø4mm or spades
  - soldering connection of cable at the back side



**UTIČNICA AUDIO ZVUČNICI 2M**


- KM26PW
- KM26SB
- KM26AT
- KM26ES
- KM26IW



- SOCKET AUDIO LOUDSPEAKERS 2M**
- audio 2x Ø4 mm
  - pričvršćivanje vodiča za zvučnike umetanjem ili banana utikačem Ø4 mm
  - lemljenje spojeva kabela na stražnjoj strani
- SOCKET AUDIO LOUDSPEAKERS**
- audio 2x Ø4mm
  - to accommodate speaker wire, banana plug Ø4mm or spades
  - soldering connection of cable at the back side



1M = 22,5 x 45  
2M = 45 x 45

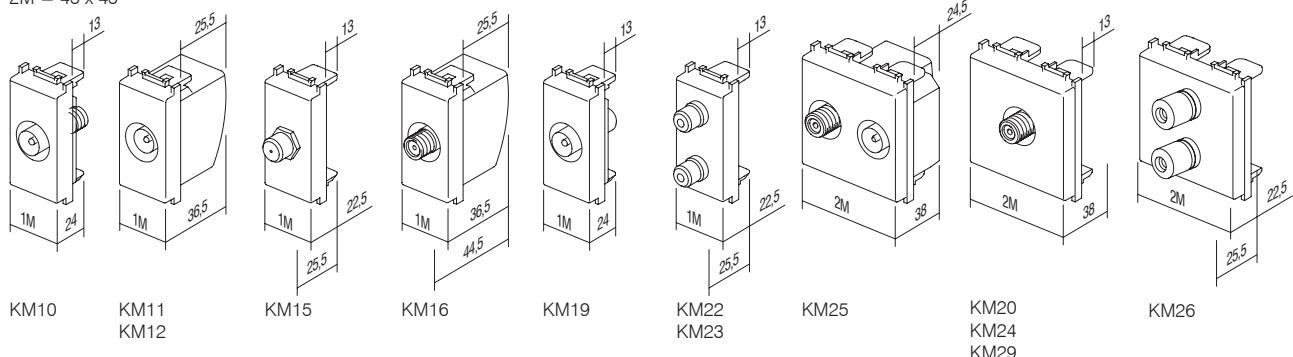




- KM30PW
- KM30SB
- KM30AT
- KM30ES
- KM30IW

#### UTIČNICA TEL LT RJ11 6/4 1M


- TEL LT vijak
  - RJ11 6/4
  - sukladno normi IEC 60603-7
  - viđano pričvršćivanje
- SOCKET TEL LT RJ11 6/4 1M**
- *TEL LT screw*
  - *RJ11 6/4*
  - *in accordance with IEC 60603-7*
  - *screw contacts*

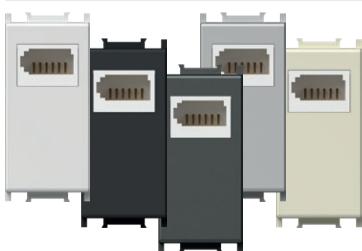

- KM31PW
- KM31SB
- KM31AT
- KM31ES
- KM31IW

#### UTIČNICA TEL BT SEC 6/6 1M


- TEL BT britanski standard
  - SEC sekundarna 6/6
  - sukladno normi BS 6312
  - viđano pričvršćivanje
- SOCKET TEL BT SEC 6/6 1M**
- *TEL BT British standard*
  - *SEC secondary 6/6*
  - *in accordance with BS 6312*
  - *screw contacts*

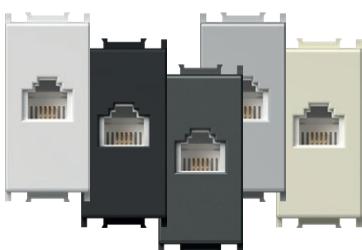

- KM36PW
- KM36SB
- KM36AT
- KM36ES
- KM36IW

#### UTIČNICA TEL KS RJ11 6/4 1M


- KS keystone standard pričvršćivanja
  - RJ11 6/4
  - sukladno normi IEC 60603-7
- SOCKET TEL KS RJ11 6/4 1M**
- *KS keystone fixing standard*
  - *RJ11 6/4*
  - *in accordance with IEC 60603-7*

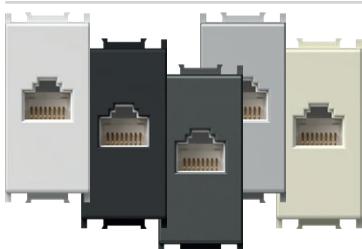

- KM37PW
- KM37SB
- KM37AT
- KM37ES
- KM37IW

#### UTIČNICA CAT5e KS RJ45 8/8 1M

- KS keystone standard pričvršćivanja
  - CAT5e, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT5e KS RJ45 8/8 1M**
- *KS keystone fixing standard*
  - *CAT5e, RJ45 8/8*
  - *in accordance with IEC 60603-7*

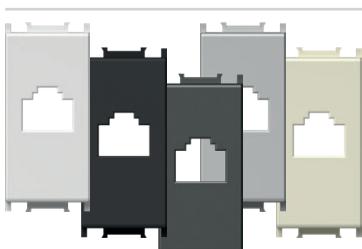

- KM35PW
- KM35SB
- KM35AT
- KM35ES
- KM35IW

#### ADAPTER KS 1M

- KS keystone standard pričvršćivanja
  - AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
  - nije ugrađen komunikacijski modul
- ADAPTER KS 1M**
- *KS keystone fixing standard*
  - *AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...*
  - *communication module not included*




- KM38PW
- KM38SB
- KM38AT
- KM38ES
- KM38IW

#### ADAPTER KS SA ZAŠTITOM OD PRAŠINE 1M

- KS keystone standard pričvršćivanja sa zaštitom od prašine
  - AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
  - nije ugrađen komunikacijski modul
- ADAPTER KS WITH DUST PROTECTION 1M**
- *KS keystone fixing standard with dust protection*
  - *AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...*
  - *communication module not included*



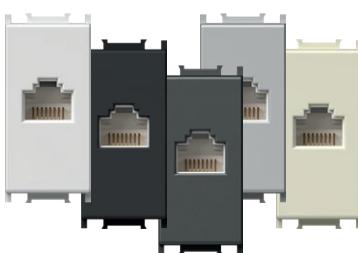


- KM39PW
- KM39SB
- KM39AT
- KM39ES
- KM39IW

#### UTIČNICA CAT6 SCH KS RJ45 8/8 1M

- KS keystone standard pričvršćivanja
- CAT6 UTP toolless, RJ45 8/8
- odgovara ISO/IEC 11801

#### SOCKET CAT6 SCH KS RJ45 8/8 1M

- KS keystone fixing standard
- CAT6 UTP toolless, RJ45 8/8
- in accordance with ISO/IEC 11801

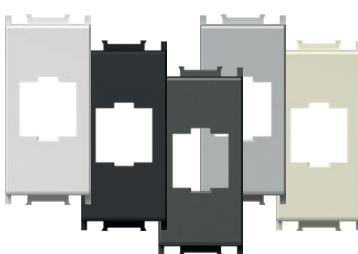


- KM50PW
- KM50SB
- KM50AT
- KM50ES
- KM50IW

#### ADAPTER KS UNIVERZALNI 1M

- KS keystone standard pričvršćivanja
- prikladan za HDMI, USB
- nije ugrađen komunikacijski modul

#### ADAPTER KS UNIVERSAL 1M

- KS keystone fixing standard
- suitable for HDMI, USB
- communication module not included

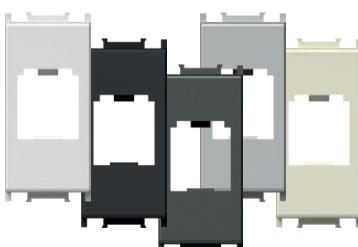

- KM40PW
- KM40SB
- KM40AT
- KM40ES
- KM40IW

#### ADAPTER PD 1M

- PD Panduit Mini-COM standard pričvršćivanja
- nije ugrađen komunikacijski modul

#### ADAPTER PD 1M

- PD Panduit Mini-COM fixing standard
- communication module not included



- KM43PW
- KM43SB
- KM43AT
- KM43ES
- KM43IW

#### ADAPTER PD SA ZAŠТИТОM OD PRAŠINE 1M

- PD Panduit Mini-COM standard pričvršćivanja sa zaštitom od prašine
- nije ugrađen komunikacijski modul

#### ADAPTER PD WITH DUST PROTECTION 1M

- PD Panduit Mini-COM fixing standard with dust protection
- communication module not included




- KM46PW
- KM46SB
- KM46AT
- KM46ES
- KM46IW

#### ADAPTER R&M 1M

- R&M standard pričvršćivanja
- nije ugrađen komunikacijski modul

#### ADAPTER R&M 1M

- R&M fixing standard
- communication module not included

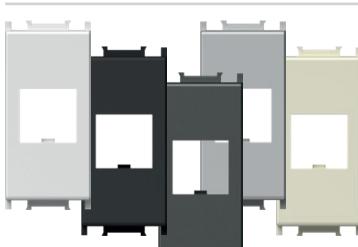

- KM52PW
- KM52SB
- KM52AT
- KM52ES
- KM52IW

#### ADAPTER R&M CAT6A 1M

- R&M montaža za CAT6A
- nije ugrađen komunikacijski modul

#### ADAPTER R&M CAT6A 1M

- R&M fixing for CAT6A
- communication module not included



**ADAPTER R&M SA ZAŠТИТОМ OD PRAŠINE 1M**

- KM47PW
- KM47SB
- KM47AT
- KM47ES
- KM47IW

- R&M standard pričvršćivanja sa zaštitom protiv prašine  
- nije ugrađen komunikacijski modul

**ADAPTER R&M WITH DUST PROTECTION 1M**

- R&M fixing standard with dust protection  
- communication module not included

**ADAPTER R&M CAT6A SA ZAŠТИТОМ OD PRAŠINE 1M**


- KM53PW
- KM53SB
- KM53AT
- KM53ES
- KM53IW

- R&M montaža za CAT6A s poklopcom za zaštitu od prašine  
- nije ugrađen komunikacijski modul

**ADAPTER R&M CAT6A WITH DUST PROTECTION 1M**

- R&M fixing for CAT6A with dust protection  
- communication module not included



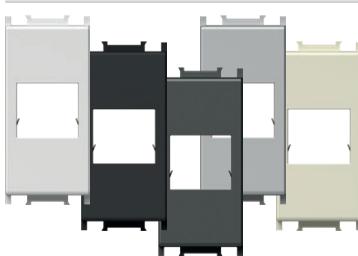


- KM45PW
- KM45SB
- KM45AT
- KM45ES
- KM45IW

**ADAPTER LK 1M**

- LK LeoniKerpen eLine / BKS NewLine standard pričvršćivanja  
- nije uključen komunikacijski modul

**ADAPTER LK 1M**


- LK LeoniKerpen eLine / BKS NewLine fixing standard  
- communication module not included

**ADAPTER NEXANS/SCHRACK 2M**

- pričvršćivanje adaptera za Nexans LANmark i module Schrack 45x45mm  
- prikladno za tip Nexan N423.540N  
- prikladno za tip Schrack HSEMD02W2F  
- nije ugrađen komunikacijski modul

**ADAPTER NEXANS/SCHRACK 2M**

- fixing adapter for Nexans LANmark and Schrack module 45x45mm  
- suitable for Nexans type N423.540N  
- suitable for Schrack type HSEMD02W2F  
- communication module not included

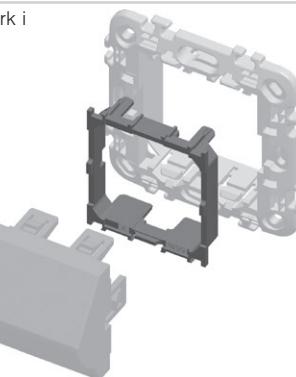

- KM48PW
- KM48SB
- KM48AT
- KM48ES
- KM48IW

**ADAPTER AT&T SYSTIMAX SA ZAŠTIMOM OD PRAŠINE 1M**

- AT&T Systimax standard pričvršćivanja sa zaštitom od prašine  
- nije ugrađen komunikacijski modul

**ADAPTER AT&T SYSTIMAX WITH DUST PROTECTION 1M**

- AT&T Systimax fixing standard with dust protection  
- communication module not included



- KM51PW
- KM51SB
- KM51AT
- KM51ES
- KM51IW

**UTIČNICA USB TIP A 1M**




- USB 2.0 utičnica tip A  
- vijčano pričvršćivanje, raster 5 mm, 1,5 mm<sup>2</sup>, 1x2P + 1x3P  
- spajanje:  
PIN 1 – VCC (+5V, crvena žica)  
PIN 2 – Data - (bijela žica)  
PIN 3 – Data + (zelena žica)  
PIN 4 – GND - uzemljenje (crna žica)  
S – zaštita  
- sukladno direktivi 2011/95/EU (RoHS2)

**SOCKET USB TYPE A 1M**


- USB 2.0 socket type A  
- screw contacts, raster 5 mm, 1,5 mm<sup>2</sup>, 1x2P + 1x3P  
- wiring:

PIN 1 – VCC (+5V, red wire)  
PIN 2 – Data - (white wire)  
PIN 3 – Data + (green wire)  
PIN 4 – GND - ground (black wire)  
S – shield  
- in accordance with directive 2011/95/EU (RoHS2)


1M = 22,5 x 45  
2M = 45 x 45




KM35  
KM38  
KM48




KM36  
KM37  
KM39




KM40  
KM43



KM45



KM46  
KM47  
KM50  
KM52  
KM53



KM51



KA10

tip type	naziv description	tehnički podaci technical data
KA10	KONEKTOR KS CAT3 CONNECTOR KS CAT3	RJ11 6/4
KA11	KONEKTOR KS CAT5e CONNECTOR KS CAT5e	RJ45 8/8
KA12	KONEKTOR KS CAT5eS CONNECTOR KS CAT5eS	RJ45 8/8

## KONEKTOR KS CAT3 RJ11 6/4



KA10

- KS keystone standard pričvršćivanja
  - CAT3, RJ11 6/4
  - sukladno normi IEC 60603-7
- CONNECTOR KS CAT3 RJ11 6/4**
- KS keystone fixing standard
  - CAT3, RJ11 6/4
  - in accordance with IEC 60603-7

## KONEKTOR KS CAT5e RJ45 8/8



KA11

- KS keystone standard pričvršćivanja
  - CAT5e, RJ45 8/8
  - sukladno normi IEC 60603-7
- CONNECTOR KS CAT5e RJ45 8/8**
- KS keystone fixing standard
  - CAT5e, RJ45 8/8
  - in accordance with IEC 60603-7

## KONEKTOR KS CAT5eS RJ45 8/8



KA12

- KS keystone standard pričvršćivanja
  - CAT5eS, RJ45 8/8
  - sukladno normi IEC 60603-7
- CONNECTOR KS CAT5eS RJ45 8/8**
- KS keystone fixing standard
  - CAT5eS, RJ45 8/8
  - in accordance with IEC 60603-7

## KONEKTOR KS CAT6 SCH RJ45 8/8



KA15

- KS keystone standard pričvršćivanja
  - CAT6 UTP bezalatna montaža, RJ45 8/8
  - sukladno normi ISO/IEC 11801
- CONNECTOR KS CAT6 SCH RJ45 8/8**
- KS keystone fixing standard
  - CAT6 UTP toolless, RJ45 8/8
  - in accordance with ISO/IEC 11801

## KONEKTOR KS CAT6S SCH RJ45 8/8



KA16

- KS keystone standard pričvršćivanja
  - CAT6S STP bezalatna montaža, RJ45 8/8
  - sukladno normi ISO/IEC 11801
- CONNECTOR KS CAT6S SCH RJ45 8/8**
- KS keystone fixing standard
  - CAT6S STP toolless, RJ45 8/8
  - in accordance with ISO/IEC 11801

## KONEKTOR KS CAT6a SCH RJ45 8/8



KA17

- KS keystone standard pričvršćivanja
  - CAT6a STP bezalatna montaža, RJ45 8/8
  - sukladno normi ISO/IEC 11801
- CONNECTOR KS CAT6a SCH RJ45 8/8**
- KS keystone fixing standard
  - CAT6a STP toolless, RJ45 8/8
  - in accordance with ISO/IEC 11801



KA18

**KONEKTOR TANKI KS CAT6S SCH RJ45 8/8**

- KS keystone standard pričvršćivanja
  - tanki dizajn
  - CAT6S STP bezalatna montaža, RJ45 8/8
  - sukladno normi ISO/IEC 11801
  - prikladno i s KE46 dvostrukim adapterom
- CONNECTOR SLIM KS CAT6S SCH RJ45 8/8**
- KS keystone fixing standard
  - slim style
  - CAT6S STP toolless, RJ45 8/8
  - in accordance with ISO/IEC 11801
  - suitable also for KE46 double adapter



KA27

**KONEKTOR KS HDMI**

- KS keystone standard pričvršćivanja
  - samo u kombinaciji s adapterom KM50
  - HDMI/HDMI
- CONNECTOR KS HDMI**
- KS keystone fixing standard
  - only in combination with adapter KM50
  - HDMI/HDMI



KA28

**KABEL KS HDMI**

- KS keystone standard pričvršćivanja
  - samo u kombinaciji s adapterom KM50
  - HDMI/HDMI
- CABLE KS HDMI**
- KS keystone fixing standard
  - only in combination with adapter KM50
  - HDMI/HDMI



EM31



PW



tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
EM10	REGULATOR OSVJETLJENJA ROTACIJSKI 300W <i>DIMMER ROTATIVE</i>	1M		<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
EM12	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNRL 300W <i>DIMMER ROTATIVE 2WAY</i>	1M		<input checked="" type="checkbox"/> SB crna mat <i>soft touch black</i>
EM23	REGULATOR OSVJETLJENJA UGRADNI RC,RL 200VA <i>DIMMER INBOX</i>	/		<input checked="" type="checkbox"/> AT antracit <i>anthracite</i>
.	.	.	.	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	.	<input type="checkbox"/> IW bež sjajna <i>ivory white</i>
.	.	.	.	<input type="checkbox"/> BL plava <i>blue</i>
.	.	.	.	<input type="checkbox"/> RD crvena <i>red</i>
.	.	.	.	<input type="checkbox"/> GR zelena <i>green</i>
.	.	.	.	<input type="checkbox"/> OR narančasta <i>orange</i>
.	.	.	.	<input type="checkbox"/> RG crveno-zelena <i>red/green</i>

## REGULATOR OSVJETLJENJA ROTACIJSKI R 300W 1M



- EM10PW
- EM10SB
- EM10AT
- EM10ES
- EM10IW

- rotacijski bez sklopke  
- tip RTS34, 43 RVP, opterećenje R, 40W – 300W  
- mrežni napon 230V~ 50Hz  
- nije moguća kombinacija s izmjeničnom sklopkom  
- povezivanje više regulatora osvjetljenja nije dopušteno  
- sukladno normi EN 60669-1  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
- LED indikacija

## DIMMER ROTATIVE R 300W 1M



- rotation control without switch  
- type RTS34, 43 RVP, load R, 40W - 300W  
- supply voltage 230V~ 50Hz  
- 2-way switch combination is not possible  
- more dimmers combination is not allowed  
- in accordance with EN 60669-1  
- screw contacts 1.5-2.5mm<sup>2</sup>  
- LED indication

## REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RL 300W 1M



- EM12PW
- EM12SB
- EM12AT
- EM12ES
- EM12IW

- rotacijski s izmjeničnom sklopkom  
- opterećenje RL, 40 W – 300 W  
- napajanje 230 V~ 50 Hz  
- moguća je kombinacija s izmjeničnom sklopkom  
- zajedničko montiranje više uređaja u jednu dozu  
dopušteno je isključivo pod uvjetom da njihovo ukupno maksimalno opterećenje ne premašuje maksimalnu snagu jedne sklopke za zatamnjivanje  
- dopušteno je korištenje samo jedne sklopke za zatamnjivanje po strujnom krugu  
- osigurač nije montiran – morate upotrijebiti vanjski osigurač  
- sukladno normi EN 60669-1  
- vijčano pričvršćivanje vodiča presjeka 1,5 – 2,5 mm<sup>2</sup>  
- integrirana LED rasvjeta označava razinu zatamnjivanja



## DIMMER ROTATIVE 2WAY RL 300W 1M

- rotation control with 2-way switch  
- load RL, 40W - 300W  
- supply voltage 230V~ 50Hz  
- 2-way switch combination is possible  
- installing several devices together in one box is only permitted if their total maximum load does not exceed the maximum power of a single dimmer  
- one circuit allows the use of only one dimmer  
- no built-in fuse – external fuse must be used  
- in accordance with EN 60669-1  
- screw contacts - 1.5-2.5mm<sup>2</sup>  
- integrated LED indication of dimming level



- EM12PW
- EM12SB
- EM12AT
- EM12ES
- EM12IW



- EM13PW
- EM13SB
- EM13AT
- EM13ES
- EM13IW

#### REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI LED 60W 1M

- rotacijski s izmjeničnom sklopkom
- opterećenje:  
LED, 0 – 60 W (maks. 6 LED tijjalica s regulacijom osvjetljenja)  
GLS, 0 – 60 W
- napajanje 230 V~ 50 Hz
- moguća je kombinacija s izmjeničnom sklopkom
- zajedničko montiranje više uređaja u jednu dozu dopušteno je isključivo pod uvjetom da njihovo ukupno maksimalno opterećenje ne premašuje maksimalnu snagu jedne sklopke za zatamnjivanje
- dopušteno je korištenje samo jedne sklopke za zatamnjivanje po strujnom krugu
- osigurač nije montiran – morate upotrijebiti vanjski osigurač
- sukladno normi IEC60669-2-1
- vijčano pričvršćivanje vodiča presjeka 1,5 – 2,5 mm<sup>2</sup>



#### DIMMER ROTATIVE/2WAY LED 60W 1M

- rotation control with 2-way switch
- loads: LED, 0 – 60W (max. 6 dimmable LED lamps)  
GLS, 0 – 60W
- supply voltage 230V~ 50Hz
- 2-way switch combination is possible
- installing several devices together in one box is only permitted if their total maximum load does not exceed the maximum power of a single dimmer
- one circuit allows the use of only one dimmer
- no built-in fuse – external fuse must be used
- in accordance with IEC60669-2-1
- screw contacts - 1.5-2.5mm<sup>2</sup>

#### REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI LED 180W 1M



- EM14PW
- EM14SB
- EM14AT
- EM14ES
- EM14IW

- rotacijski s izmjeničnom sklopkom
- opterećenje:  
LED, 0 – 180 W (maks. 20 LED tijjalica s regulacijom osvjetljenja)  
GLS, 0 – 180 W
- napajanje 230 V~ 50 Hz
- moguća je kombinacija s izmjeničnom sklopkom
- zajedničko montiranje više uređaja u jednu dozu dopušteno je isključivo pod uvjetom da njihovo ukupno maksimalno opterećenje ne premašuje maksimalnu snagu jedne sklopke za zatamnjivanje
- dopušteno je korištenje samo jedne sklopke za zatamnjivanje po strujnom krugu
- osigurač nije montiran – morate upotrijebiti vanjski osigurač
- sukladno normi IEC60669-2-1
- vijčano pričvršćivanje vodiča presjeka 1,5 – 2,5 mm<sup>2</sup>



#### DIMMER ROTATIVE/2WAY LED 180W 1M

- rotation control with 2-way switch
- loads:  
LED, 0 – 180W (max. 20 dimmable LED lamps)  
GLS, 0 – 180W
- supply voltage 230V~ 50Hz
- 2-way switch combination is possible
- installing several devices together in one box is only permitted if their total maximum load does not exceed the maximum power of a single dimmer
- one circuit allows the use of only one dimmer
- no built-in fuse – external fuse must be used
- in accordance with IEC60669-2-1
- screw contacts - 1.5-2.5mm<sup>2</sup>

#### REGULATOR OSVJETLJENJA ROTACIJSKI R 250W 1M



- EM15PW
- EM15SB
- EM15AT
- EM15ES
- EM15IW

- rotacijski bez sklopke
- tip RTS34, 43 RVP, opterećenje R, 40W – 250W
- mrežni napon 230V~ 50Hz
- nije moguća kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- LED indikacija



#### DIMMER ROTATIVE R 250W 1M

- rotation control without switch
- type RTS34, 43 RVP, load R, 40W - 250W
- supply voltage 230V~ 50Hz
- 2-way switch combination is not possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>
- LED indication



EM23

**UGRADBENI ZATAMNJIVAČ R (250 W), (RC,RL 200VA)**

- ugradbeni, za povezivanje s tipkalom
- opterećenje RLC 15-250W ili 15-200 VA
- napajanje 230 V~ 50HZ
- moguće povezivanje više tipkala
- nije dopušteno povezivanje više tipkala
- ugrađena memorija funkcija
- funkcija mekog uključivanja/isključivanja
- »leading edge«
- kompatibilan s EN60669, EN60950, EN 61000, ETSI EN 300 220-1, ETSI EN 300 220-2
- vijčana montaža vodiča do presjeka 2,5 mm<sup>2</sup>

**DIMMER INBOX R (250 W), (RC, RL 200 VA)**

- inbox, controlled by external push button
- load RLC 15-250W or 15-200 VA
- supply voltage 230V~ 50HZ
- several push-buttons combinations are possible
- more dimmers combination is not allowed
- light intensity memory
- soft start/stop function
- »leading edge«
- in accordance with EN60669, EN60950, EN 61000, ETSI EN 300 220-1, ETSI EN 300 220-2
- screw contacts to wires 2,5 mm<sup>2</sup>

**UGRADBENI ZATAMNJIVAČ LED 250 W**

EM18



- ugradbeni, za povezivanje s tipkalom
- leading ili trailing edge
- napajanje 230 V~ 50 Hz
- moguće povezivanje više tipkala
- ugrađena memorija funkcija
- funkcija mekog uključivanja/isključivanja
- postavljanje minimalnog osvjetljenja
- montaža samo jednog uređaja u jednu dozu
- samo za unutrašnju uporabu
- usklađen s normama EN 60669-1 i EN 60669-2-1

**DIMMER INBOX LED 250W**

- inbox, controlled by external push button
- for leading or trailing edge
- supply voltage 230V~ 50Hz
- several push-buttons combinations is possible
- light intensity memory
- soft start / stop function
- minimum intensity control
- only one dimmer per wall box
- only for indoor usage
- in accordance with EN 60669-1 and EN 60669-2-1

**UGRADBENI ZATAMNJIVAČ DC LED 96 W**



EM19




- ugradbeni, za povezivanje s tipkalom
- povezanost sa svim jedinicama napajanja LED rasvjete sa stalnim naponom i nekim jedinicama napajanja LED rasvjete sa stalnim tokom, 9 – 48 V DC, max 96 W
- nije namijenjeno uporabi s induktivnim opterećenjem
- moguće povezivanje više tipkala i zatamnjivača
- ugrađena memorija funkcija
- funkcija mekog uključivanja/isključivanja
- montaža samo jednog uređaja u jednu dozu
- samo za unutrašnju uporabu

**DIMMER INBOX DC LED 96W**





- inbox, controlled by external push button
- for use with constant voltage LED drivers and some constant current LED drivers, 9-48V DC, max 96W (also for LED strips)
- not for use with inductive loads
- several push-buttons combinations and several dimmers is possible
- light intensity memory
- soft start / stop function
- only one dimmer per wall box
- only for indoor usage








EM13 (0÷60W), EM14 (0÷180W),  
EM23 (15÷250W, 15÷200VA),  
EM18 (2÷250VA (3÷10÷250VA), 2÷250W)

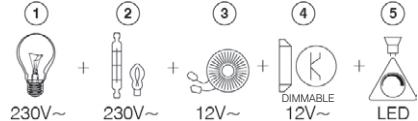



- 1 - žarulja sa žarnom nit / incandescent lamp
- 2 - halogena žarulja / halogen lamp
- 3 - klasični transformator / classical transformer
- 4 - električki transformator s regulatom osvjetljenja / dimmable electronic transformer
- 5 - LED tinjalica s regulacijom osvjetljenja / dimmable LED lamp

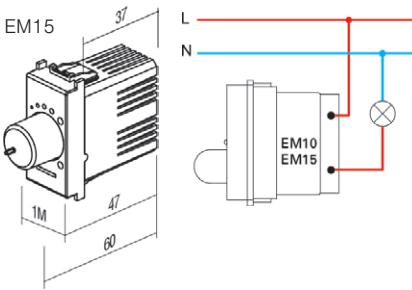



EM23

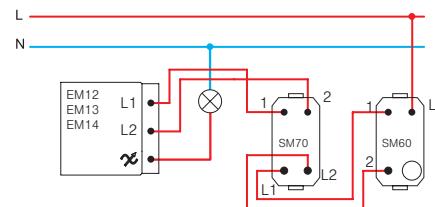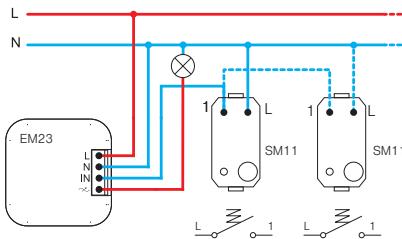

EM18

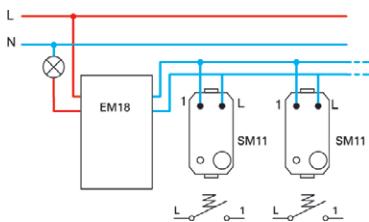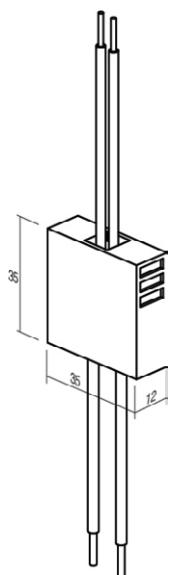


EM19

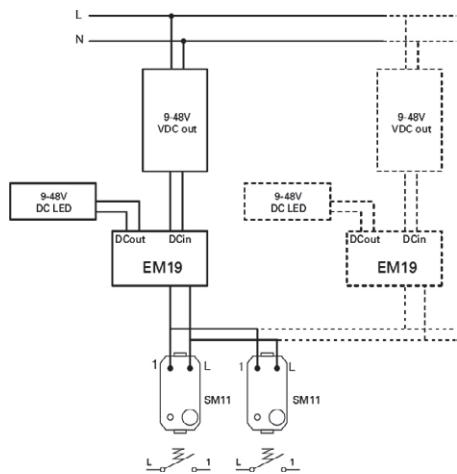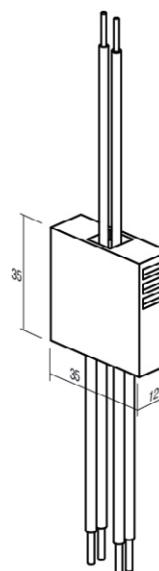**POZOR!**

Ako se više regulatora osvjetljenja priključi u jednu kutiju, za svaki se dodatni regulator smanjuje maksimalna ukupna snaga za 10%.

**ATTENTION!**

If more dimmers are connected in one box reduce maximum common power for 10% for each dimmer.

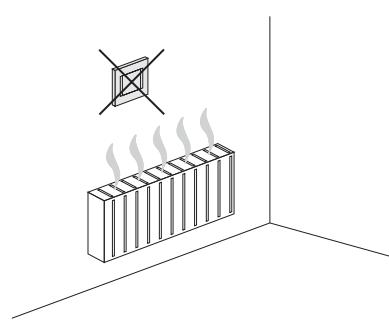



- EM25PW
- EM25SB
- EM25AT
- EM25ES
- EM25IW

TOUCH EM25 je mikroprocesorski upravljan zatamnjivač svjetla. Služi kao sklopka te zatamnjivač za zatamnjive i neke vrste nezatamnjivih žarulja. Ugradeni mikroprocesor automatski prepoznaje vrstu žarulje i prilagodava način rada. Pamti razinu zatamnjivanja nakon isključivanja, zahvaljujući ugrađenoj memorijskoj funkciji. Funkcija polaganog paljenja produžava vijek trajanja žarulje. U tipku integrirana elegantna LED rasvjeta omogućava razne boje i razine intenziteta. Moguće je spojiti do 5 dodatnih upravljačkih sklopki EM26 („slave“).

TOUCH EM25 is microprocessor controlled electronic light dimmer. It serves as switch and dimmer for dimmable and some of non-dimmable lamps. Integrated microprocessor automatically identifies the type of lamp and adjusts the operating mode. It remembers the level of dimming after switching off due to integrated memory function. Soft-start function extends the lamp service life. In button integrated elegant LED illumination enables many different colors and intensity levels. Optionally one can connect of up to 5 additional control tasters EM26 (»slave«).

#### SKLOPKA / REGULATOR OSVJETLJENJA UNIVERZALNI RLC 0-300W 2M


- univerzalni elektronički regulator osvjetljenja za uključivanje i isključivanje i regulaciju osvjetljenja svih zatamnjivih žarulja (klasična, halogen, LED, CFL, ...) i nekih vrsta nezatamnjivih
- automatska detekcija tipa tinjalice i prilagodba režima rada
- smanjenje potrošnje energije
- funkcija usporenog starta produljuje vijek trajanja tinjalice
- kontrola preko ugrađene mikrosklopke
- ugrađena funkcija memorije – pri gašenju memorira stupanj svjetlosti
- može se priključiti do pet (5) dodatnih kontrolnih jedinica EM26
- nije moguće kombiniranje s izmjeničnom sklopkom
- ugrađena zaštita od kratkog spoja, pregrijavanja i preopterećenja
- mrežni napon 230V~ 50Hz
- elegantno LED osvjetljenje, prilagodljiva boja i stupanj osvjetljenja
- moguća zamjena klasične sklopke u dvožičnom spoju<sup>(1)</sup>
- potpuna funkcionalnost postiže se u trožičnom spoju<sup>(2)</sup>
- sukladno normama EN 60669-1 i EN 60669-2-1
- vijčano pričvršćivanje vodiča presjeka 1,5 mm<sup>2</sup> (maks. moment zatezanja 0,4 Nm)



#### SWITCH / DIMMER UNIVERSAL RLC 0-300W 2M

- universal electronic dimmer for ON/OFF switching and dimming of all dimmable lamps (classical, halogen, LED, CFL, ...) and some non-dimmable lamps
- automatic detection of lamp type and adjustment of operating mode
- reduction of energy consumption
- soft start function extends life of lamps
- controlled by build-in micro switches
- memory function included – memorizes brightness on turn-off
- up to five (5) additional control units EM26 can be connected
- connection with 2-way switch is not possible
- build-in short-circuit, overheating and overload protection
- supply voltage 230V~ 50Hz
- elegant LED illumination, adjustable colour and brightness
- replacement of classical switch is possible at two-wire connection<sup>(1)</sup>
- full functionality is achieved at three-wire connection<sup>(2)</sup>
- in accordance with EN 60669-1 and EN 60669-2-1
- screw contacts 1.5mm<sup>2</sup> (max. tightening torque 0.4Nm)


(1)dvožični spoj  
two-wire connection



- dvožičano spajanje omogućava zatamnjivanje zatamnjivih žarulja

- two-wire connection allows dimming of dimmable lamps

(2)trožični spoj  
three-wire connection



- trožičano spajanje omogućava zatamnjivanje zatamnjivih žarulja te nekih nezatamnjivih LED i CFL lampi

- three-wire connection allows dimming of dimmable lamps and some of non-dimmable LED and CFL lamps

	1	2	5	6	7
Min.	40 W	40 W	40 VA	40 VA	40 VA
Max.	300 W	300 W	300 VA	100 VA	100 VA

(F)	(F)	(F)
-----	-----	-----

1 - žarulja sa žarnom nitom / incandescent lamp

2 - halogena žarulja / halogen lamp

4 - elektronički transformator s regulatorom osvjetljenja / dimmable electronic transformer

5 - klasični transformator / classical transformer

	1	2	4	6	7	8	9
Min.	0 W	0 W	0 VA 120 VA	0 VA	0 VA	0 VA 120 VA	0 VA
Max.	300 W	300 W	120 VA	120 VA	120 VA	120 VA	120 VA

(F)	(F)	(F)	(F)
-----	-----	-----	-----

6 - štedna CFL tinjalica s regulacijom osvjetljenja / dimmable energy saving CFL lamp

7 - LED tinjalica s regulacijom osvjetljenja / dimmable LED lamp

8 - štedna CFL tinjalica bez regulacije osvjetljenja / non-dimmable energy saving CFL lamp

9 - LED tinjalica bez regulacije osvjetljenja / non-dimmable LED lamp

napomene /  
remarks


- (F) filter EM27

- preporučujemo korištenje EM27 filtra / it is recommended to use filter EM27

- sve spojene žarulje moraju biti jednake / all controlled lamps must be the same

- tablica opterećenja vrijedi za žarulje s faktorom PF>0,5 / table of loads is valid for lamps with power factor PF>0,5

paljenje / gašenje te zatamnjivanje žarulje /  
on / off switching and dimming of lamp



odabir boje i podešavanje intenziteta LED osvjetljenja /  
LED colour selection and intensity level adjustment



\* funkcija "RESET" /  
"RESET" function



osvjetljivanje  
dugi pritisak  
dimming up  
long press



istovremeni pritisak ~3s  
ugrađeno LED svjetlo  
trepne 3 puta  
simultaneous press ~3s  
integrated LED blinks 3 times

istovremeni pritisak ~3s  
ugrađeno LED svjetlo  
trepne 3 puta  
simultaneous press ~3s  
integrated LED blinks 3 times

zatamnjivanje  
dugi pritisak  
dimming down  
long press



odabir boje  
kratki pritisak  
colour selection  
short press

ponovni istovremeni pritisak ~5s  
ugrađeno LED svjetlo  
trepne 5 puta  
re-simultaneous press ~5s  
integrated LED blinks 5 times





ugrađeno LED osvjetljivanje  
dugi pritisak  
integrated LED dimming up  
long press

- \* - preporučuje se za ugradnju zatamnjivača i pri zamjeni žarulje
- obvezno kod korištenja nezatamnjivih žarulja
- funkcija "RESET" nije dostupna kod korištenja dvožičanog spajanja
- moguće samo za EM25
- it is recommended at dimmer installation and lamp replacement
- mandatory when using non-dimmable lamps
- "RESET" function is not possible when using two-wire connection
- only possible on EM25


ugrađeno LED zatamnjivanje  
dugi pritisak  
integrated LED dimming down  
long press

spremanje postavki – istovremeni  
kratki pritisak  
ugrađeno LED svjetlo trepne 3 puta  
settings saving - simultaneous short  
press  
integrated LED blinks 3 times

upozorenja za ugradnju /  
installation precautions



pri montaži ne pritišćite tipku /  
do not push on button during mounting

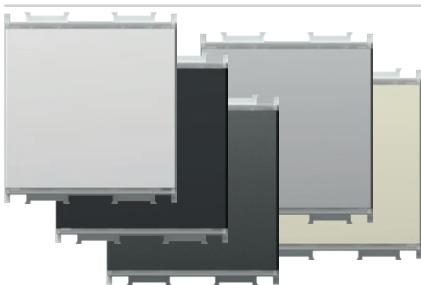

- EM26PW
- EM26SB
- EM26AT
- EM26ES
- EM26IW

#### UPRAVLJAČKA JEDINICA - TIPKALO 2M


- priključena na univerzalni regulator osvjetljenja
- dopušta upravljanje tijanjicama s istom funkcionalnošću kao EM25
- mrežni napon  $230V \sim 50Hz$
- sukladno normama EN 60669-1 i EN 60669-2-1
- vijčano pričvršćivanje vodiča presjeka  $1,5 mm^2$  (maks. moment zatezjanja  $0,4 Nm$ )



#### PUSH-BUTTON CONTROL UNIT 2M

- connected to universal dimmer EM25 allows controlling of lamps with same functionality as EM25
- supply voltage  $230V \sim 50Hz$
- in accordance with EN 60669-1 and EN 60669-2-1
- screw contacts  $1.5mm^2$  (max. tightening torque  $0.4Nm$ )


(1)dvožični spoj  
two-wire connection

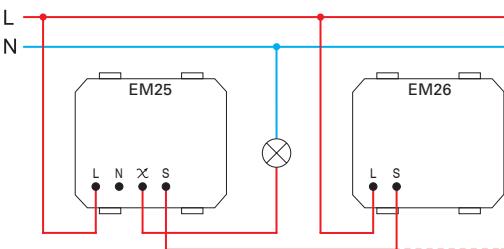

- dvožičano spajanje omogućava zatamnjivanje zatamnjivih žarulja
- kod dvožičnog spajanja korištenje svake dodatne upravljačke jedinice povećava minimalno opterećenje za 25W

- two-wire connection allows dimming of dimmable lamps
- in a two-wire connection each additional control unit increases the minimum load by 25W

(2)trožični spoj  
three-wire connection

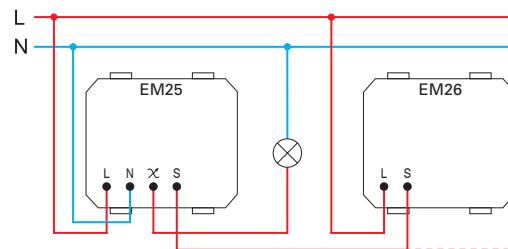

- trožičano spajanje omogućava zatamnjivanje zatamnjivih žarulja te nekim nezatamnjivim LED i CFL lampi

- three-wire connection allows dimming of dimmable lamps and some of non-dimmable LED and CFL lamps



EM27

#### FREKVencijski FILTER


- filter frekvencijskih smetnji za EM25

L  
- prikaz je simboličan

#### FREQUENCY FILTER

- frequency filter for EM25

- image is symbolic

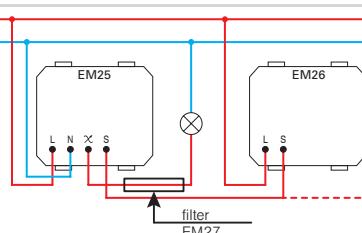

#### SET SKLOPKA / REGULATOR OSVJETLJENJA UNIVERZALNI RLC 0-300W 2M PP OL20


- EM25PPOL20

- set uključuje regulator osvjetljenja EM25, ugradbeni nosač 2M i okvir LINE 2M PW
- za tehničke detalje pogledajte EM25


#### SET SWITCH / DIMMER UNIVERSAL RLC 0-300W 2M PP OL20

- set includes dimmer EM25, mounting frame 2M and cover plate LINE 2M PW

- for technical details see EM25



2M = 45 x 45





- EM31PW
- EM31SB
- EM31AT
- EM31ES
- EM31IW

#### IR SKLOPKA 5A 230V~ 1M

- IR infracrvena sklopka
- napajanje:  $230V^{\sim} \pm 10\% 50Hz$
- relje: 5A /  $250V^{\sim}$  izlaz za ograničeni strujni tok s velikim otporom za prolaz kroz ništicu („zero crossing“)
- zaštitna razina: IP40
- presjek žica na kontaktnom terminalu: 0,75 - 2,5 mm<sup>2</sup>
- kut prepoznavanja: do  $110^{\circ}$  pri  $20^{\circ}C$
- raspon prepoznavanja: približno 8m pri  $20^{\circ}C$
- prilagodljivost trajanja: od približno 5 s do 12 min
- prilagodljivost osvjetljenja: od približno 5 do 200 LUX
- temperatura radnog okruženja: od  $0^{\circ}C$  do  $+40^{\circ}C$
- nije prikladan za ugradnju u kutije duboke 45 mm te podžbukne kutije CUBO IP20
- samo za unutrašnju uporabu



#### IR SWITCH 5A 230V~ 1M

- IR infrared switch
- supply voltage:  $230V^{\sim} \pm 10\% 50Hz$
- relay: 5A /  $250V^{\sim}$  output for limited current with high resistance for zero crossing
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm<sup>2</sup>
- detection angle: up to  $110^{\circ}$  at  $20^{\circ}C$
- detection area: approx. 8 m at  $20^{\circ}C$
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from  $0^{\circ}C$  to  $+40^{\circ}C$
- not suitable for installation in 45 mm deep boxes and surface mount box CUBO IP20
- only for indoor usage



- EM32PW
- EM32SB
- EM32AT
- EM32ES
- EM32IW

#### IR SKLOPKA 5A 230V~ 2M



- IR infracrvena sklopka
- napajanje:  $230V^{\sim} \pm 10\% 50Hz$
- relje: 5A /  $250V^{\sim}$  izlaz za ograničeni strujni tok s velikim otporom za prolaz kroz ništicu („zero crossing“)
- zaštitna razina: IP40
- presjek žica na kontaktnom terminalu: 0,75 - 2,5 mm<sup>2</sup>
- kut prepoznavanja: do  $110^{\circ}$  pri  $20^{\circ}C$
- raspon prepoznavanja: približno 8m pri  $20^{\circ}C$
- prilagodljivost trajanja: od približno 5 s do 12 min
- prilagodljivost osvjetljenja: od približno 5 do 200 LUX
- temperatura radnog okruženja: od  $0^{\circ}C$  do  $+40^{\circ}C$
- nije prikladan za ugradnju u kutije duboke 45mm te podžbukne kutije CUBO IP20
- samo za unutrašnju uporabu



#### IR SWITCH 5A 230V~ 2M


- IR infrared switch
- supply voltage:  $230V^{\sim} \pm 10\% 50Hz$
- relay: 5A /  $250V^{\sim}$  output for limited current with high resistance for zero crossing
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm<sup>2</sup>
- detection angle: up to  $110^{\circ}$  at  $20^{\circ}C$
- detection area: approx. 8 m at  $20^{\circ}C$
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from  $0^{\circ}C$  to  $+40^{\circ}C$
- not suitable for installation in 45 mm deep boxes and surface mount box CUBO IP20
- only for indoor usage

mogućnost raspoznavanja  
detection range

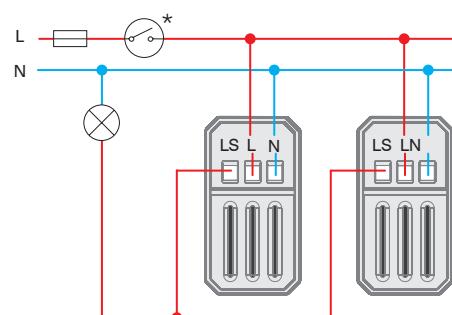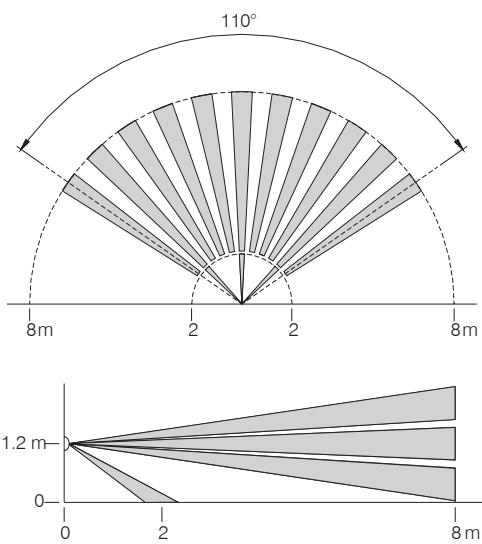

## ELECTRONICS E M

podešavanje vremena i osjetljivosti /  
time and twilight adjustment

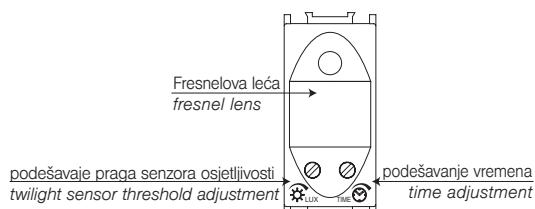

	5 LUX	200 LUX
	~5 s	~12 min

	1	2	3	4	5	6	7	8
Min.	1 W	1 W			1 W	1 W	1 VA	1 VA
Max.	800 W	800 W			6x36 W	4x36 W (20μF)	6x23 VA	6x20 VA

1 - žarulja sa žarnom niti /  
incandescent lamp

2 - halogena žarulja /  
halogen lamp

3 - otporan grijaci element /  
resistive heating element

4 - elektronički transformator /  
electronic transformer


5 - fluorescentna cijev (izvedba 1) /  
fluorescent tube (version 1)

6 - fluorescentna cijev (izvedba 2) /  
fluorescent tube (version 2)


7 - štedna CFL žarulja /  
energy saving CFL lamp

8 - LED žarulja /  
LED lamp

upozorenja /  
attention

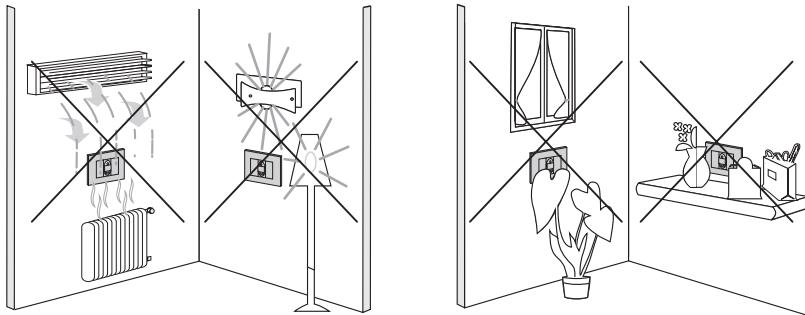

1M = 22,5 x 45

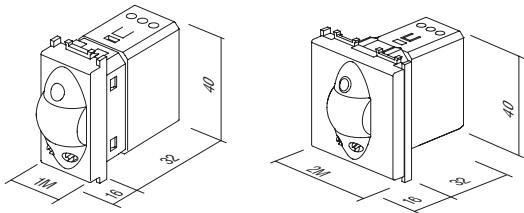




□ EM37PW  
■ EM37SB  
■ EM37AT  
■ EM37ES  
■ EM37IW


Termostat je namijenjen reguliranju temperature u prostoru. Termostat omogućava dva načina rada – grijanje ili hlađenje. Ugrađene su i sigurnosne funkcije protiv smrzavanja (način grijanja) te protiv pregrijavanja (način hlađenja). Način rada se označava preko LED osvjetljenja. Postavke termostata unose se pomoću okretnog mehanizma za postavljanje temperature te s drugim kapacitivnim dodirnim tipkama.

*The thermostat is intended for regulating temperature in a room. A thermostat enables two modes of operation – heating or cooling. It has safety functions installed for protection against freezing (heating mode) and protection against overheating (cooling mode).*


*The operation is indicated via LED lights. Thermostat setup is performed with the help of a rotary button for setting the temperature and with other capacitive touch buttons.*

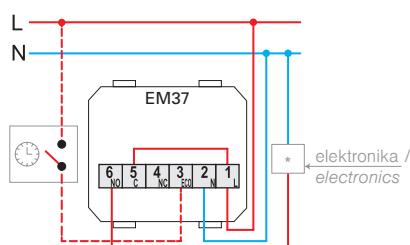

cirkulacijska crpka, plamenik (direktno spajanje)  
termoelektrični pogon /  
circulation pump, burner (direct connection)  
thermoelectric drive

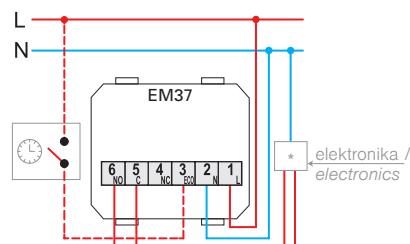

bojler, toplinska crpka, plamenik (upravljački unos T1/T2) /  
boiler, heat pump, burner (control input T1/T2)

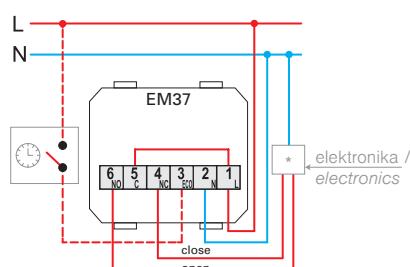

motorni pogon (ograničena uporaba s podnim grijanjem) /  
motor drive (limited use with underfloor heating)

## TERMOSTAT OSNOVNI 6A 230V~ 2M

- elektronički termostat, osnovni
- način rada: grijanje / hlađenje / isključeno
- napajanje: 230 VAC, 50 Hz
- izlaz: 6(2) A, 230 VAC, reljefna sklopka
- raspon regulacije: +10 °C do +30 °C
- histerezija: ±0.5 °C, ED = 20min
- zaštita protiv smrzavanja (način grijanja): +6 °C
- zaštita protiv pregrijavanja (način hlađenja): +32 °C
- funkcija ECO za snižavanje temperature za 3 °C za 6 sati u načinu grijanja te povećanja temperature za 3 °C za 6 sati u načinu hlađenja
- prilagodena ECO funkcija, svaki dan automatski u isto vrijeme snižava temperaturu za 3 °C unutar 6 sati u načinu grijanja te povećava temperaturu za 3 °C unutar 6 sati u načinu hlađenja
- mogućnost uključivanja ECO funkcije vanjskim okidačem putem odvojenog unosa, LED indikator načina rada
- nije prikladan za električno podno grijanje
- višljano pričvršćivanje vodiča presjeka maks. 2,5 mm<sup>2</sup>
- sukladno s LV Direktivom, EMC Direktivom, standardima EN60730-1 te EN60730-2-9
- za pravilno korištenje preporučujemo instaliranje u zasebnu kutiju, odvojenu od uređaja koji stvaraju toplinu
- temperatura korištenja: 5 – 35 °C
- temperatura skladištenja: -20 – 50 °C




## THERMOSTAT BASIC 6A 230 V ~ 2M

- electronic thermostat, basic
- operation mode: heating/cooling/turn off
- power supply: 230 VAC, 50 Hz
- output: 6(2) A, 230 VAC, relay switch
- regulation range: +10 °C to +30 °C
- hysteresis: ±0.5 °C, ED = 20min
- anti-freeze protection (heating mode): +6 °C
- overheating protection (cooling mode): +32 °C
- ECO function for lowering the temperature by 3 °C for 6 hours in the heating mode and raising temperature by 3 °C for 6 hours in the cooling mode
- adaptive ECO function, automatically every day at the same time lowers the temperature by 3 °C for 6 hours in the heating mode and raises temperature by 3 °C for 6 hours in the cooling mode
- option to turn on the ECO operating mode by external trigger via a separate input
- LED indication of operation
- not suitable for electrical floor heating
- screw contacts max. 2.5 mm<sup>2</sup>
- in accordance with the LV Directive, the EMC Directive, standards EN60730-1 and EN60730-2-9
- for correct operation, we recommend installing in an independent single box, separate from devices that generate heat
- operating temperature: 5 – 35 °C
- storage temperature: -20 – 50 °C

### postavljanje načina rada i temperature / function and temperature adjustment

tipka za izbor načina rada i LED indikator stanja:  
crvena: grijanje  
plava: hlađenje  
ne svijetli: isključeno

function selection button and LED status indicator:  
red: heating  
blue: air conditioning  
no light: switched off

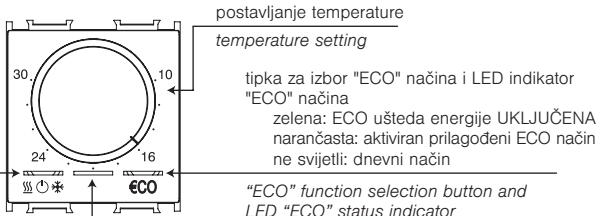

postavljanje temperature  
temperature setting


tipka za izbor "ECO" načina i LED indikator "ECO" načina  
zelena: ECO ušteda energije UKLJUČENA  
narančasta: aktiviran prilagođeni ECO način  
ne svijetli: dnevni način

"ECO" function selection button and LED "ECO" status indicator  
green: ECO energy saving ON  
orange: adaptive ECO mode activated  
no light: day mode


LED indikator stanja izlaznog relaja  
bijela: relaj uključen  
ne svijetli: relaj isključen

LED output relay state indicator  
white: relay ON  
no light: relay OFF

### upozorenja / attention

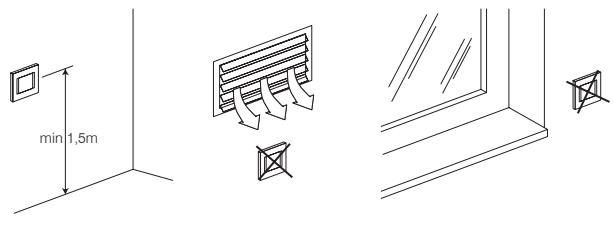

2M = 45 x 45





NM39


## NOSAČ S VIJCIMA ZA TERMOSTATE FANTINI COSMI 3M

- nosač s vijcima za termostate Fantini Cosmi 3M
- prikladan za korištenje s dnevni termostatima Fantini Cosmi modela CH121 i CH123
- prikladan za korištenje s tjednim termostatima Fantini Cosmi modela CH141A i CH143A
- ugradnja u pravokutne kutije 3M
- prikladan za kombiniranje s okvirima PURE, Line, Soft



## MOUNTING FRAME WITH SCREWS FOR FANTINI COSMI THERMOSTATS 3M

- mounting frame with screws for Fantini Cosmi thermostats 3M
- suitable for use with Fantini Cosmi daily thermostats models CH121 and CH123
- suitable for use with Fantini Cosmi weekly thermostats models CH141A and CH143A
- for mounting in rectangular boxes 3M
- suitable for assembling with cover plates PURE, Line, Soft

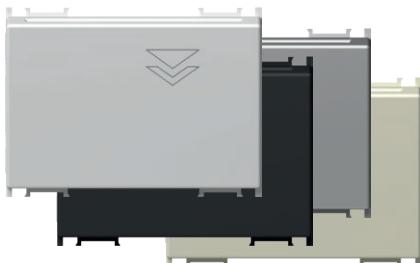

- EM40PW
- EM40SB
- EM40AT
- EM40ES
- EM40IW

## ŠTEDNA KARTIČNA SKLOPKA 3A 250V~ 3M



- osnovna kartična sklopka, za bilo koju ISO karticu
- mrežni napon 230V~ 50Hz
- izlaz: 3A 250V~ za sklopnik\*
- zadrška isklopa 15-20s
- sukladno normi EN 61000-6-1
- kartica nije priložena
- nije za kontrolu pristupa



## ENERGY SAVER CARD SWITCH 3A 250V~ 3M

- card switch basic, any ISO card
- supply voltage 230V~ 50Hz
- output 3A 250V~ for switching contactor \*
- switch off delay 15-20s
- in accordance with EN 61000-6-1
- card is not included
- not for access control

3M = 67,5 x 45

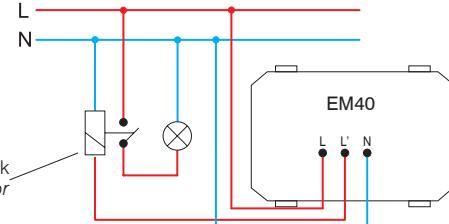


## KARTICA ISO

EM47

- ISO kartica
- za uporabu s kartičnom sklopkom EM40
- veličina: 85x54 mm


## CARD ISO

- ISO card
- for combination with card switch EM40
- size: 85x54 mm

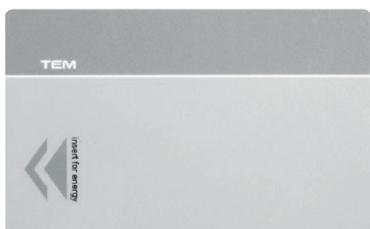



■ EM44BK

**ŠTEDNA KARTIČNA SKLOPKA RF HF 13,56MHz 3M**


- kartična sklopka elektronska za RFID ISO karticu
- napajanje iz relejne jedinice EM49 putem kablovskih konektora RJ12
- izlaz treba biti spojen na relejni izlaz EM49
- 15-20s zadrška isklopka „glavnog napajanja“ s povlačenjem kartice
- 1 min zadrška isklopka „HVAC“ s povlačenjem kartice prilikom otvaranja balkonskih vrata ili prozora
- sukladno normi EN 61000-6-1
- kartica nije priložena
- nije za kontrolu pristupa

**ENERGY SAVER CARD SWITCH RF HF 13,56MHz 3M**

- electronic card switch for RFID ISO card
- supply from relay unit EM49 through cable connectors RJ12
- output to be connected to relay output unit EM49
- 15-20s "main power" switch off delay with card withdrawal
- 1 min "HVAC" switch off delay with card withdrawal when balcony doors or windows opened
- in accordance with EN 61000-6-1
- card is not included
- not for access control



EM49

**ŠTEDNA KONTROLNA JEDINICA 2x16A 250V~**

- relejna jedinica za kartične sklopke EM44
- mrežni napon 230V~ 50Hz
- sukladno normi EN 61000-6-1
- montaža na DIN tračnicu 35 mm, 4MU
- ulaz i izlaz ovisno o primjeni: jednokrevetna ili dvokrevetna soba

**ENERGY SAVER CONTROL UNIT 2x16A 250V~**

- relay unit for card switches EM44
- supply voltage 230V~ 50Hz
- in accordance with EN 61000-6-1
- mounting on DIN rail 35mm, 3MU
- input and output depending on implementation: single or double room



EM45


**RAZDVAJAČ SPL-1**

- koristi se za spajanje dva periferna modula EM44 s relejom jedinicom EM49
- komunikacijski konektor RJ12
- veličina: 37 x 30 x 27 mm


**SPLITTER SPL-1**

- used to connect two peripheral modules EM44 to relay unit EM49
- communication connector RJ12
- size: 37 x 30 x 27 mm


dijagram spajanja za primjenu u jednokrevetnoj sobi /  
wiring diagram for single room implementation

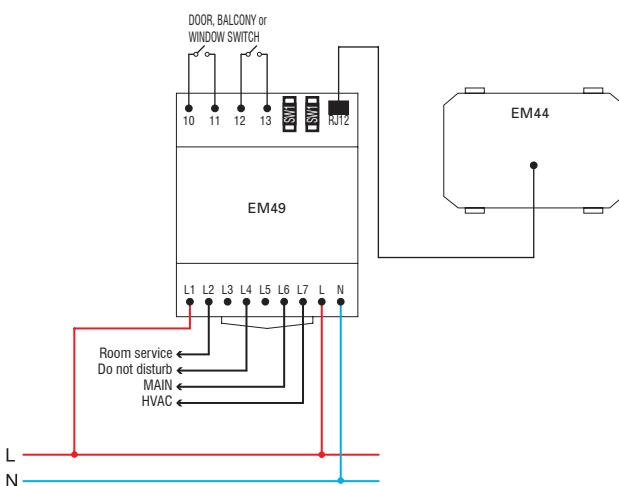


dijagram spajanja za primjenu u dvokrevetnoj sobi /  
wiring diagram for double room implementation

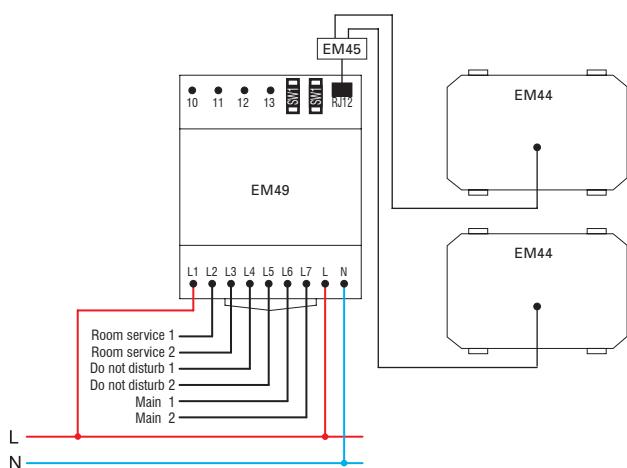


priklučni kabel RJ12 između EM44 i EM49 /  
connection cable RJ12 between EM44 and EM49

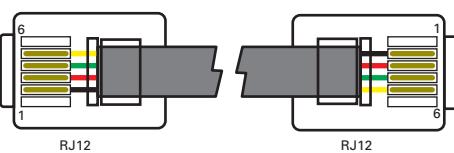

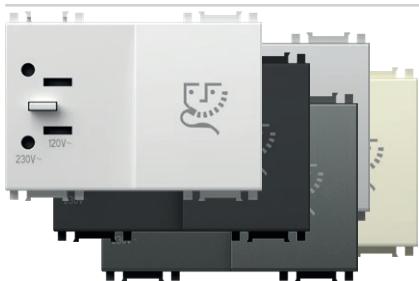


3M = 67,5 x 45





- EM60PW
- EM60SB
- EM60AT
- EM60ES
- EM60IW

**UTIČNICA ZA BRIJAĆI APARAT 230V~/120V~ 3M**

- utičnica za brijaći aparat s izolacijskim transformatorom 20VA
  - napajanje: 230V~ 50-60Hz
  - izlaz: 230V~ za 2P 2,5A euro utikac ili 120V~ za 2P 15A američki utikac
  - razred II
  - sukladno normi EN 61558-2-5
- SOCKET SHAVER 230V~/120V~ 3M**
- shaver supply unit with isolating transformer 20VA
  - supply: 230V~ 50-60Hz
  - output:
    - 230V~ for 2P 2.5A Europlug or 120V~ for 2P 15A American plug  - Class II
  - in accordance with EN 61558-2-5




- EM66PW
- EM66SB
- EM66AT
- EM66ES
- EM66IW

**JEDINICA NAPAJANJA 5V 2,1A 1M**

- Za punjenje elektroničkih uređaja putem standardnog USB priključka (sukladno i s Apple uređajima)
- napajanje: 100 - 230 V~ 50/60Hz
- potrošnja: 300 mA pri 100 V~/150 mA pri 230 V~
- potrošnja pri mirovanju: 30 mW pri 230 V~
- nazivni izlazni napon: 5 VDC ( $\pm 5\%$ ) SELV
- nihanje (ripple) izlaznog napona: 150 mV
- nazivna izlazna snaga: 2,1 A (1x 2.100 mA) ( $\pm 10\%$ )
- učinkovitost: maks. 77 %
- radna temperaturna obala: 0 °C/+ 45 °C (unutarnja uporaba)
- IP zaštitni razred: IP20, samo za unutarnju uporabu
- gurnosni razred: II
- prenaponska kategorija (EN 62109): Klasa III
- vijčano pričvršćivanje vodiča presjeka maks. 2,5 mm<sup>2</sup>
- uređaj s razmakom kontakta od najmanje 3 mm
- sukladno standardu EN 60950-1 te LVD i EMC direktivama



**USB POWER SUPPLY UNIT 5V 2,1A 1M**

- for charging of electronic devices via a standard USB port (also compatible with Apple devices)
- power supply: 100-230V~ 50/60Hz
- power consumption: 300mA at 100V~/150mA at 230V~
- stand-by power consumption: 30mW at 230V~
- nominal output voltage: 5 VDC ( $\pm 5\%$ ) SELV
- output ripple voltage: 150mV
- nominal output current: 2,1A (1 x 2.100mA) ( $\pm 10\%$ )
- efficiency: maximum of 77%
- operating temperature: 0°C/+45°C (indoor use)
- IP protection class: IP20, indoor use only
- class device II
- overvoltage category (EN 62109): Class III
- screw contacts: max. 2.5 mm<sup>2</sup>
- device with a contact gap of at least 3mm
- in accordance with EN 60950-1 and LVD & EMC directives

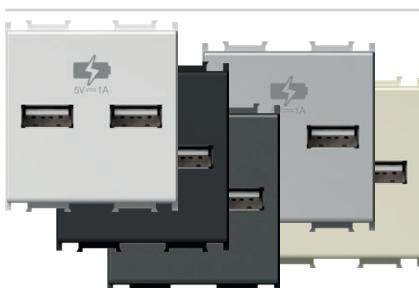

- EM65PW
- EM65SB
- EM65AT
- EM65ES
- EM65IW

2M = 45 x 45

**USB PUNJAČ 5V 1A 2M**

- za punjenje elektroničkih uređaja putem standardnog USB priključka (sukladno i s Apple uređajima)
- omogućava istovremeno punjenje dva uređaja
- napajanje: 230V~ 50Hz
- potrošnja pri mirovanju: 50 mW pri 230V~
- nazivni izlazni napon: 5 VDC ( $\pm 5\%$ ) SELV
- nihanje (ripple) izlaznog napona: 150 mV
- nazivna izlazna snaga: 1A (1x 1.000mA ili 2 x 500mA) ( $\pm 10\%$ )
- učinkovitost: veća od 67%
- IP zaštitni razred: IP20, samo za unutrašnju uporabu
- vijčano pričvršćivanje vodiča presjeka maks. 2,5 mm<sup>2</sup>
- sukladno standardu EN 60950-1 te EMC direktivi
- kao dio instalacije potrebno je uzeti u obzir odgovarajući vanjski uređaj za isključivanje

**POWER SUPPLY UNIT USB 5V 1A 2M**



- for charging of electronic devices via a standard USB port (also compatible with Apple devices)
- enables charging of two devices simultaneously
- power supply: 230V~ 50Hz
- stand-by power consumption: 50 mW at 230V~
- nominal output voltage: 5 VDC ( $\pm 5\%$ ) SELV
- output ripple voltage: 150 mV
- nominal output current: 1 A (1 x 1.000 mA or 2 x 500 mA) ( $\pm 10\%$ )
- efficiency: greater than 67%
- IP protection class: IP20, indoor use only
- screw contacts: max. 2.5 mm<sup>2</sup>
- in accordance with EN 60950-1 and EMC directive
- an appropriate external disconnect device needs to be considered as part of installation



- EM67PW
- EM67SB
- EM67AT
- EM67ES
- EM67IW

#### JEDINICA NAPAJANJA 5V 2,4A 1M

- Za punjenje elektroničkih uređaja putem standardnog USB priključka (sukladno i s Apple uređajima)
- napajanje: 100 – 230 V~ 50/60 Hz
- potrošnja: 300 mA pri 100 V~/150 mA pri 230 V~
- potrošnja pri mirovanju: 30 mW pri 230 V~
- nazivni izlazni napon: 5 VDC ( $\pm 5\%$ ) SELV
- nijihanje (ripple) izlaznog napona: 150 mV
- nazivna izlazna snaga: 2,4A ( $\pm 10\%$ )
- učinkovitost: maks. 77 %
- radna temperatura: 0 °C/+ 45 °C (unutarnja uporaba)
- IP zaštitni razred: IP20, samo za unutarnju uporabu
- gurnosni razred uredaja II
- prenaponska kategorija (EN 62109): Klasa III
- vijčano pričvršćivanje vodica presjeka maks. 2,5 mm<sup>2</sup>
- uredaj s razmakom kontakta od najmanje 3 mm
- sukladno standardu EN 60950-1 te LVD i EMC direktivama



#### USB POWER SUPPLY UNIT 5V 2,4A 1M

- for charging of electronic devices via a standard USB port (also compatible with Apple devices)
- power supply: 100-230V~ 50/60Hz
- power consumption: 300mA at 100V~/150mA at 230V~
- standby power consumption: 30mW at 230V~
- nominal output voltage: 5 VCD ( $\pm 5\%$ ) SELV
- output ripple voltage: 150mV
- nominal output current: 2,4A ( $\pm 10\%$ )
- efficiency: maximum of 77%
- operating temperature: 0 °C/-45 °C (indoor use)
- IP protection class: IP20, indoor use only
- class device II
- overvoltage category (EN 62109): Class III
- screw contacts: max. 2.5 mm<sup>2</sup>
- device with a contact gap of at least 3mm
- in accordance with EN 60950-1 and LVD & EMC directives



- EM55

#### LED SVJETILKA ZA SLUČAJ NUŽDE 250V~ 0.9W, NiCd 3h 7M



- LED svjetiljka za slučaj nužde
- mrežni napon 250V~ 50Hz 3xLED 0,3W
- LED, 10000mcd, 6500K
- NiCd akumulator 400 mAh, zamjenjiv
- autonoman rad 3 h, punjenje 24 h
- razred II
- sukladno normama EN 60598-1, EN 60598-2-2, EN 60598-2-22



#### LED EMERGENCY LIGHT 250V~ 0.90W, NiCd 3h 7M

- emergency LED lamp
- supply voltage 250V~ 50Hz 3x LED 0,3W, 10000mcd, 6500K
- NiCd accumulator 400 mAh, replaceable
- autonomy 3h, charging 24h
- Class II
- in accordance with EN 60598-1, EN 60598-2-2, EN 60598-2-22

7M = 151,5 x 45

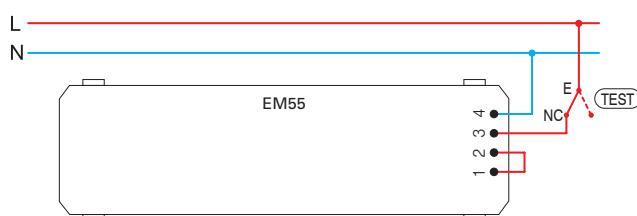

- EM57



#### LED SVJETILKA ZA SLUČAJ NUŽDE 230V~ 50 Hz 0,5W, NiMH 2h 2M



- LED svjetiljka za slučaj nužde
- može se upotrebljavati kao prijenosna ručna svjetiljka (mekhanizam na izvlačenje)
- mrežni napon 230V~ 50Hz 1xLED 0,5W
- NiMH akumulator 140 mAh, zamjenjiv
- autonoman rad 2 h, punjenje 36 h
- razred II
- sukladno normama EN 60598-1, EN60598-2-2, EN62471, EN55015:2006, EN61547



#### LED EMERGENCY LIGHT 230V~50Hz, 0.5W, NiMH 2h 2M

- emergency LED lamp
- option to use it as a hand lamp (pull-out mechanism)
- supply voltage 230V~50Hz, 1xLED 0.5W
- NiMH accumulator 140mAh, replaceable
- autonomy 2h, charging 36h
- class device II
- in accordance EN60598-1, EN60598-2-2, EN62471, EN55015:2006, EN61547






- EM50WH
- EM50BL
- EM50RD
- EM50GR

#### LED SVJETILJKA JEDNOBOJNA 250V~ 0,8W 2M

- LED svjetiljka za označavanje stepenica
  - mrežni napon 230V~ 50Hz 0,8W, 6500K
  - razred II
  - sukladno normi EN 60598-1
  - optionalna uporaba za osvjetljavanje pravca ili signaliziranje s laserskom gravurom na difuzeru prema želji korisnika
- LED LAMP MONOCOLOR 250V~ 0,8W 2M**
- step marker LED lamp
  - supply voltage 230V~ 50Hz 0,8W, 6500K
  - Class II
  - in accordance with EN 60598-1
  - optional usage for directional or signal illumination with customized laser printing on diffuser

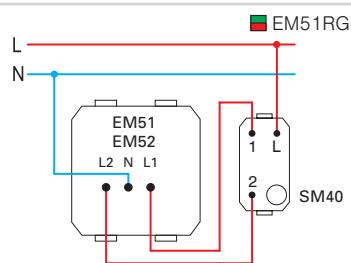


- EM51RG

#### LED SVJETILJKA DVOBOJNA 250V~ 2x0,4W 2M

- LED svjetiljka s dvobojnom signalizacijom (crveno/zelenom)
- mrežni napon 230V~ 50Hz 2x0,4W, 6500K
- razred II
- sukladno normi EN 60598-1
- difuzer obuhvaća i grafiku prema prikazu
- moguć laserski otisk na difuzeru prema želji korisnika

#### LED LAMP DUAL COLOR 250V~ 2x0,4W 2M

- signaling dual color (red/green) LED lamp
- supply voltage 230V~ 50Hz 2x0,4W, 6500K
- Class II
- in accordance with EN 60598-1
- diffuser includes graphics as shown
- possible customized laser printing on diffuser

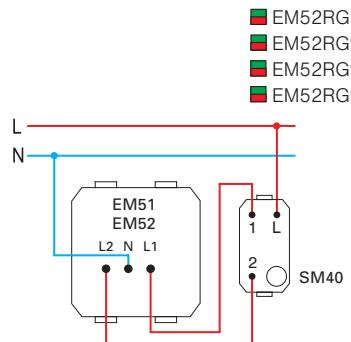

- EM52RG
- EM52RG90
- EM52RG91
- EM52RG99

#### LED SVJETILJKA 3D DVOBOJNA 250V~ 2x0,4W 2M


- LED dvobojna svjetiljka (crvena/zelena) s 3D simbolom, za označavanje
- mrežni napon 230V~ 50Hz 2x0,4W, 6500K
- razred II
- sukladno normi EN 60598-1
- mogućnost otiska prilagođenih grafika po želji
- 90 muških simbola, 91 ženski simbol, 99 simbola na zahtjev

#### LED LAMP 3D DUAL COLOR 250V~ 2x0,4W 2M

- signalling LED lamp, dual color (red/green) with 3D symbol
- supply voltage 230V~ 50Hz 2x0,4W, 6500K
- class II
- in accordance with EN 60598-1
- possible customized graphics on request
- 90 male symbol, 91 female symbol, 99 symbol on request





■ EM52RG91

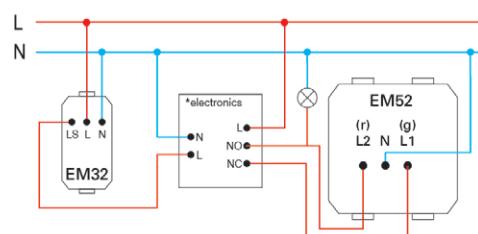

■ EM52RG90

2M = 45 x 45

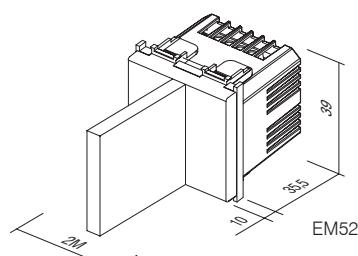



EM71PW  
 EM71SB  
 EM71AT  
 EM71ES  
 EM71IW


### PREKIDAČ NA OTISAK PRSTA BIOPASS 2M

- prekidač na otisak prsta u kompletu s unutarnjom reljefnom jedinicom i uređajem za napajanje
- kapacitet: 500 otiska prsta
- jednostavno upravljanje s pomoću mobilne aplikacije X-Manager
- napon napajanja: 8 – 30 V – DC ili AC (uredaj za napajanje uključen)
- kapacitivni senzor
- 2 izlazna relaja
- maksimalni napon/struja na relaju: 40 V/3 A
- vrijeme pokretanja relaja: 1 – 10 s
- maksimalna snaga: 3,6 W
- 256-bitna enkripcija veže između prekidača i unutarnje reljene jedinice
- Set također uključuje nosač NM24 i dekorativni okvir OS20.



### FINGERPRINT SWITCH BIOPASS 2M

- fingerprint switch with included internal relay unit and power supply
- capacity: 500 fingerprints
- easy management via X-Manager mobile app
- power supply voltage: 8-30V – DC or AC (power supply included)
- capacitive sensor
- 2 output relays
- maximum voltage/current on relay: 40V/3A
- relay triggering time: 1-10 sec
- maximum power: 3.6W
- 256-bit encrypted link between switch and internal relay unit
- Set also includes NM24 mounting frame and OS20 decorative cover plate.

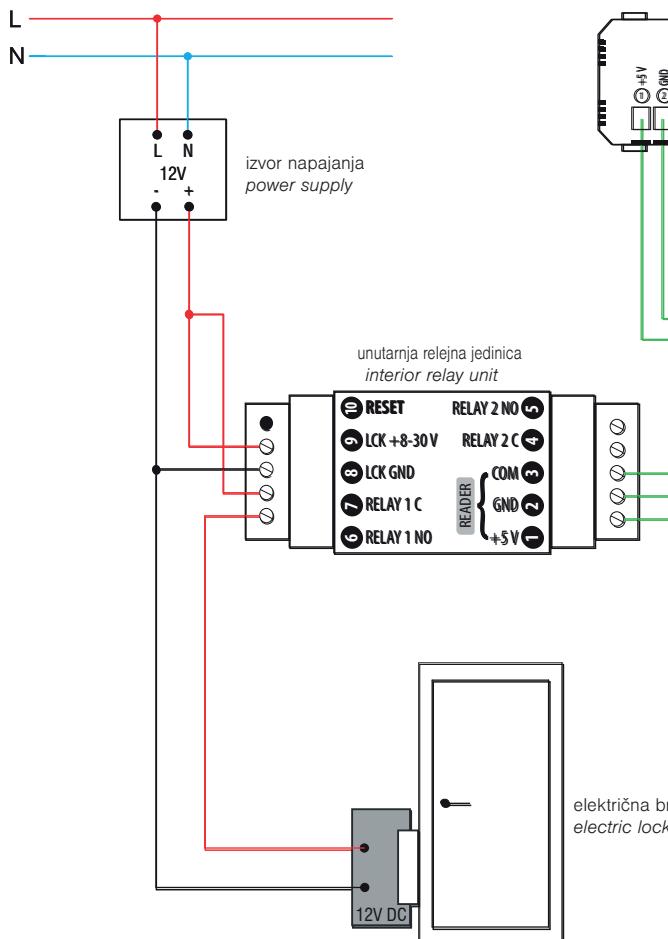


X-Manager app



[support.tem.si](http://support.tem.si)



vanjska jedinica  
exterior unit



## SKLOPKA, BESKONTAKTNA 10A 240V~

■ EM80GW



- beskontaktna sklopka za uključivanje i isključivanje („glavna”)
- napajanje: 240 V~ 50 Hz
- izlazni reljef 10A / 250V~ (2400W pri 240V~)
- prilagodljivi raspon od 2 do 10 cm
- namijenjeno za ugradnju u standardnu okruglu kutiju Ø60 mm
- neutralni kabel (N) je potreban za spajanje
- nije moguće kombiniranje polužnom sklopkom
- moguće je povezivanje s do 5 EM81 upravljačkih sklopki
- jednostavna ugradnja dekorativnih poklopaca uz pomoć ma gneta
- vijčano pričvršćivanje kabela do 2.5 mm<sup>2</sup> (maks. vijčani moment zatezanja 0.4 Nm)
- sukladno normama EN 60669-1 i EN 60669-2-1
- samo za unutrašnju uporabu

## SWITCH, TOUCHLESS 10A 240V~

- touchless switch for turning on/off ("master")
- power supply: 240 V~ 50 Hz
- output relay 10A / 250V~ (2400W at 240V~)
- adjustable range from 2 to 10 cm
- intended for installation into a standard round Ø60 mm box
- a neutral lead (N) is required for connection
- connection with toggle switches is not possible
- connection with up to 5 EM81 control switches is possible
- simple installation of decorative covers with the help of magnets
- screw fastening of leads up to 2.5 mm<sup>2</sup> (max. screw tightening torque is 0.4 Nm)
- in accordance with EN 60669-1 and EN 60669-2-1
- only for indoor use



## SKLOPKA, BESKONTAKTNA, UPRAVLJAČKA JEDINICA





■ EM81GW




- upravljačka sklopka ("slave")
- radi samo kad je spojena sa sklopom EM80 („glavna”)
- prilagodljivi raspon od 2 do 10 cm
- jednostavna ugradnja dekorativnih poklopaca uz pomoć ma gneta
- vijčano pričvršćivanje kabela do 2.5 mm<sup>2</sup> (maks. vijčani moment zatezanja 0.4 Nm)
- sukladno normama EN 60669-1 i EN 60669-2-1
- samo za unutrašnju uporabu

## SWITCH, TOUCHLESS, CONTROL UNIT

- control switch ("slave")
- works only when connected with the EM80 switch ("master")
- adjustable range from 2 to 10 cm
- simple installation of decorative covers with the help of magnets
- screw fastening of leads up to 2.5 mm<sup>2</sup> (max. screw tightening torque is 0.4 Nm)
- in accordance with EN 60669-1 and EN 60669-2-1
- only for indoor use

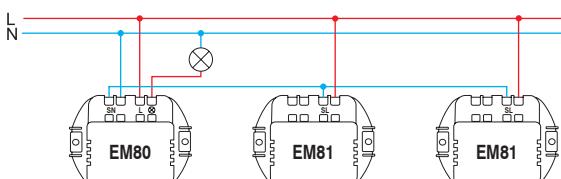


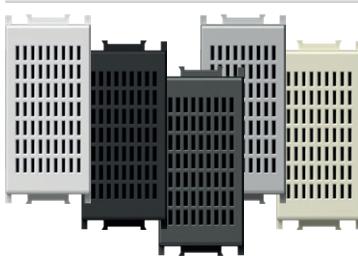

□ EM90PW  
■ EM90SB  
■ EM90AT  
■ EM90ES  
■ EM90IW

#### ZVONO 8VA 230V~ 1M


- signalno zvono
- emisija zvuka traje vremenski jednako kao i postupak posluživanja
- mrežni napon  $230V \sim 50Hz$  8VA

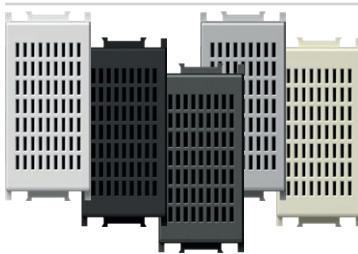

□ EM91PW  
■ EM91SB  
■ EM91AT  
■ EM91ES  
■ EM91IW

#### ZVONO 8VA 12V~ 1M


- signalno zvono
- emisija zvuka traje vremenski jednako kao i postupak posluživanja
- mrežni napon  $12V \sim 50Hz$  8VA

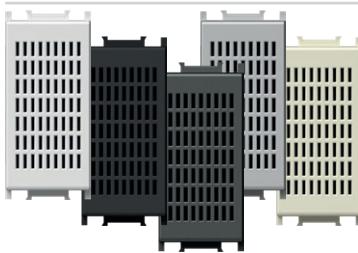

□ EM92PW  
■ EM92SB  
■ EM92AT  
■ EM92ES  
■ EM92IW

#### ZVONO 8VA 230V~ 1M




- signalno zvono
- emisija zvuka traje vremenski jednako kao i postupak posluživanja
- mrežni napon  $230V \sim 50Hz$  8VA

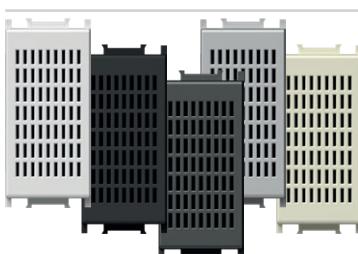

□ EM93PW  
■ EM93SB  
■ EM93AT  
■ EM93ES  
■ EM93IW


#### ZVONO 8VA 12V~ 1M

- signalno zvono
- emisija zvuka traje vremenski jednako kao i postupak posluživanja
- mrežni napon  $12V \sim 50Hz$  8VA

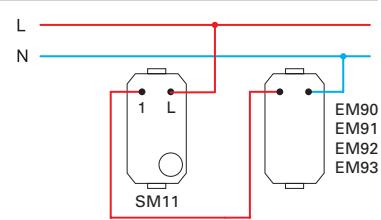



EM95PW  
 EM95SB  
 EM95AT  
 EM95ES  
 EM95IW

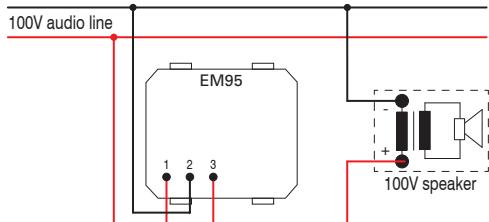

#### REGULATOR GLASNOĆE ZA 100V AUDIO LINIJU 35W 2M


- regulator glasnoće (atenuator) za 100V audio sustave
- nazivna snaga 35W (maks.45W), 6 razina glasnoće
- prikladan za ugradnju u kutije najmanje 60 mm dubine
- nije prikladan za ugradnju u kutije dubine 45 mm te podžbuknu ugradnju u kutije CUBO IP20
- samo za unutrašnju uporabu

#### VOLUME CONTROL 100V AUDIO LINE 35W 2M

- volume control (attenuator) for 100V audio systems
- power rating 35W (max.45W), 6 steps volume control
- suitable for boxes min. 60 mm deep
- not suitable for installation in 45 mm deep boxes and surface mount boxes CUBO IP20
- for indoor use only



EM96PW  
 EM96SB  
 EM96AT  
 EM96ES  
 EM96IW

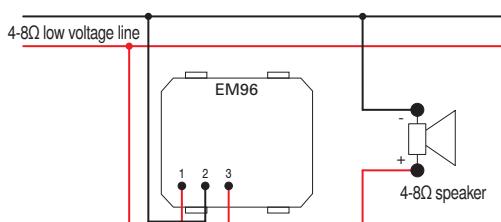


#### REGULATOR GLASNOĆE 4-8 Ω 35W 2M

- regulator glasnoće za niskonaponske izlaze 4-8 Ω, 35W
- nazivna snaga 35W, 6 razina glasnoće
- prikladan za ugradnju u kutije najmanje 60 mm dubine
- nije prikladan za ugradnju u kutije dubine 45 mm te podžbuknu ugradnju u kutije CUBO IP20
- samo za unutrašnju uporabu

#### VOLUME CONTROL 4-8 Ω 35W 2M

- volume control (attenuator) for low voltage outputs 4-8 Ω, 35W
- power rating 35W, 6 steps volume control
- suitable for boxes min. 60 mm deep
- not suitable for installation in 45 mm deep boxes and surface mount boxes CUBO IP20
- for indoor use only





CM25

PW

OS

tip type	naziv description	tehnički podaci technical data	veličina size	boja colour	opcionalni podaci 1 optional data 1
CM10	SET UTIČNICA 2X ŠUKO SOCKET SET 2x SCHUKO	2P+E 16A 250V~ 4M		<input type="checkbox"/> PW bijela sjajna polar white	<input type="checkbox"/> OL okvir LINE cover plate LINE
CM11	SET UTIČNICA 3X ŠUKO SOCKET SET 3x SCHUKO	2P+E 16A 250V~ 7M		<input checked="" type="checkbox"/> SB crna mat soft touch black	<input type="checkbox"/> OS okvir SOFT cover plate SOFT
CM15	SET SPOJNIH VODOVA LINK WIRE SET	3x1.5mm <sup>2</sup>	1M	<input checked="" type="checkbox"/> AT antracit anthracite	
.	.	.	.	<input type="checkbox"/> ES srebrna mat elox silver	
.	.	.	.	<input type="checkbox"/> IW bež sjajna ivory white	




CM10PW  
 CM10ES

#### SET UTIČNICA 2x ŠUKO 2P+E 16A 250V~ 4M

- set utičnica 2x šuko VM10 2P+E 16A 250V~
- utičnice povezane spojnim vodovima CM16
- s nosačem 4M bez vijaka
- za pričvršćivanje nosača vijci CM17, CM18 ili CM19
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- sukladno normi IEC 60884-1, CEE7

#### SOCKETS SET 2x SCHUKO 2P+E 16A 250V~ 4M

- socket set 2x schuko VM10 2P+E 16A 250V~
- prewired with link wires CM16
- with mounting frame 4M without screws
- for mounting frame fixing use screws CM17, CM18 or CM19
- screw contacts 1.5-2.5 mm<sup>2</sup>
- in accordance with IEC-60884-1, CEE7




CM11PW  
 CM11ES


#### SET UTIČNICA 3x ŠUKO 2P+E 16A 250V~ 7M

- set utičnica 3x šuko VM10 2P+E 16A 250V~
- utičnice povezane spojnim vodovima CM16
- s nosačem 7M bez vijaka
- za pričvršćivanje nosača vijci CM17, CM18 ili CM19
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- sukladno normi IEC 60884-1, CEE7

#### SOCKETS SET 3x SCHUKO 2P+E 16A 250V~ 7M

- socket set 3x schuko VM10 2P+E 16A 250V~
- prewired with link wires CM16
- with mounting frame 7M without screws
- for mounting frame fixing use screws CM17, CM18 or CM19
- screw contacts 1.5-2.5 mm<sup>2</sup>
- in accordance with IEC-60884-1, CEE7







CM15

**SET SPOJNIH VODOVA 3x1,5mm<sup>2</sup> 1M**

- set spojnih vodova za povezivanje dvaju elemenata veličine 1M
- sadrži 10 crnih, 10 plavih i 10 žuto-zelenih spojnih vodova

**LINK WIRE SET 3x1.5mm<sup>2</sup> 1M**

- link wire set to connect two elements size 1M
- includes 10 black, 10 blue and 10 yellow/green wires




CM16

**SET SPOJNIH VODOVA 3x2,5mm<sup>2</sup> 1M**

- set spojnih vodova za povezivanje dvaju elemenata veličine 2M
- sadrži 10 crnih, 10 plavih i 10 žuto-zelenih spojnih vodova

**LINK WIRE SET 3x2.5mm<sup>2</sup> 2M**


- link wire set to connect two elements size 2M
- includes 10 black, 10 blue and 10 yellow/green wires

CM17  
CM18  
CM19**SET VIJAKA 3,5**

- set vijaka za pričvršćivanje nosača NM30, NM32, NM40, NM41, NM70
- CM17 - l=20 mm, 100 kom.
- CM18 - l=35 mm, 50 kom.
- CM19 - l=50 mm, 50 kom.

**SCREW SET 3,5**

- screw set for fixing mounting frames NM30, NM32, NM40, NM41, NM70
- CM17 - l=20mm, 100pcs
- CM18 - l=35mm, 50pcs
- CM19 - l=50mm, 50pcs

 CM22PW**SET ZA SKLOPKE IP44 2M**

- za ugradnju u vlažne prostore
- IP44 zaštita za sve Modul sklopke
- sklopke i tipke nisu sastavni dio seta
- okvir SOFT 2M s natpisnom pločicom
- sukladno normi IEC 60669-1

**SET SWITCHES IP44 2M**


- for usage in humid areas
- IP44 protection provides for all Modul switches
- switches and buttons are not part of the set
- SOFT 2M cover plate with inscription plate
- in accordance with IEC 60669-1

 CM23PW**SET ZA UTIČNICU IP44 2M**

- za ugradnju u vlažne prostore
- pruža IP44 zaštitu u kombinaciji s pokrivenom utičnicom (VM11, VM41)
- utičnice nisu sastavni dio seta
- okvir SOFT 2M s natpisnom pločicom
- sukladno normi IEC 60884-1

**SET SOCKETS IP44 2M**


- for usage in humid areas
- IP44 protection can be achieved only in combination with covered socket (VM11, VM41)
- sockets are not part of the set
- SOFT 2M cover plate with inscription plate
- in accordance with IEC 60884-1

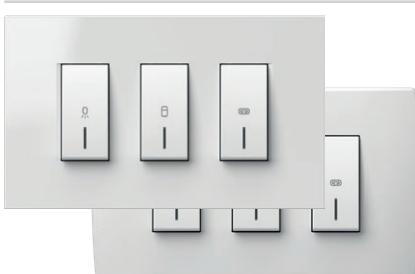
 CM25PWOL  
 CM25IWOL  
 CM25PWOS  
 CM25IWOS**KUPAONSKI SET 3x20A 250V~ 4M**

- set sklopki 3xSM12 20A 250V~ s nosačem i okvirom
- vičano pričvršćivanje vodiča presjeka 1,5-2 5mm<sup>2</sup>
- sukladno normi EN 60669-1
- univerzalno rješenje za pričvršćivanje na već ugrađene kutije s razmakom pričvršćivanja od 108 do 135 mm ili na kutije veličine 4M
- visina okvira 90 mm

**SWITCH SET FOR BATHROOM 3x20A 250V~ 4M**

- switch set 3xSM12 20A 250V~ with mounting frame and cover plate
- screw contacts 1.5-2.5mm<sup>2</sup>
- in accordance with EN 60669-1
- universal solution for renovation on boxes with fixing dimensions 108-135mm or boxes 4M size
- cover plate height 90mm






NM41

## NOSAČI ZA KUPAONSKI SET 4M

- univerzalni nosač za kupaonski set s vijcima
- univerzalno rješenje za pričvršćivanje na pravokutne kutije s razmakom pričvršćivanja od 108 do 135 mm ili na kutije veličine 4M
- sukladno normi EN 60669-1

## MOUNTING FRAME BATHROOM SET 4M

- universal mounting frame for bathroom set with screws
- universal solution for mounting on rectangular boxes with fixing dimensions 108-135mm or boxes 4M size
- in accordance with EN 60669-1




- |        |
|--------|
| OL41PW |
| OL41NB |
| OL41IW |
| OL41ES |
| OL41SG |
| OL41IB |

## OKVIRI LINE ZA KUPAONSKI SET

- dekorativni okvir LINE za kupaonski set
- visina 90 mm
- sukladno normi EN 60669-1

## COVER PLATE LINE BATHROOM SET

- decorative cover plate bathroom set LINE
- height 90mm
- in accordance with EN 60669-1




- |        |
|--------|
| OS41PW |
| OS41NB |
| OS41IW |
| OS41ES |
| OS41SG |
| OS41SB |
| OS41WE |

## OKVIRI SOFT ZA KUPAONSKI SET

- dekorativni okvir SOFT za kupaonski set
- visina 90 mm
- sukladno normi EN 60669-1


## COVER PLATE SOFT BATHROOM SET

- decorative cover plate bathroom set SOFT
- height 90mm
- in accordance with EN 60669-1



S E T S C M

E O D U L

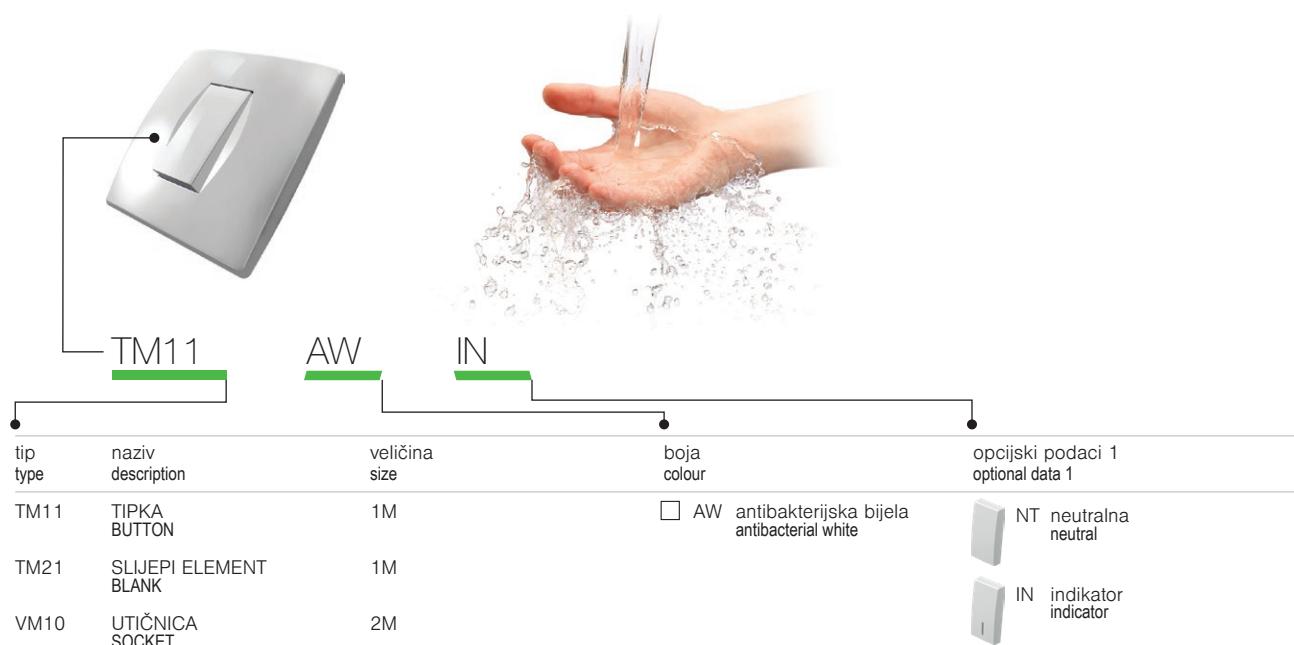**ANTIBAKTERIJSKI PROGRAM MODUL**

- brojne osobe svakodnevno dotiču sklopke i utičnice koje su stoga mesta razvoja i širenja bakterija
- zahvaljujući prirodnim antibakterijskim svojstvima, srebro se tri tisuće godina koristi kao sigurno dezinfekcijsko sredstvo, jer je potpuno prirodan i neškodljiv materijal te ne zagaduje okoliš
- posebni antibakterijski ioni srebra pružaju dugotrajnu, pouzdanu i učinkovitu zaštitu od razvoja i širenja bakterija, virusa, mikroba i gljivica
- antibakterijska zaštita osigurava kvalitetnu higijenu, čistoću i zdravlje ljudima
- savršeno prikladan za korištenje u okruženjima koja zahtijevaju stroge higijenske uvjete (bolnice, zdravstveni centri, farmaceutska postrojenja, domovi za starije i nemoćne, domovi umirovljenika, laboratoriji, restorani, hoteli, zračne luke, autobusne i željezničke postaje, poslovni i trgovacki prostori, javne institucije...)
- neovisni laboratoriji obavili su testiranja sukladno najvišim japanskim standardima JIS Z 2801
- niski troškovi osiguravanja ljudskog zdravlja
- dizajn i funkcionalnost antibakterijskog programa MODUL omogućava jednostavno čišćenje i održavanje
- antibakterijske tipke, okviri i utičnice kombinirani su sa standardnim ugradbenim okvirima i sklopkama
- proizvodi su označeni sa stražnje strane kao AB (antibakterijska bijela)

**ANTIBACTERIAL PROGRAM MODUL**

- switches and sockets are daily touched by many people, so this is a common place for development and spread of bacteria
- thanks to its natural antibacterial characteristics silver has been used for three millennia as a safe and effective disinfectant, since it is completely natural, healthy and environmentally friendly
- special antibacterial silver ions additive provides long-term, reliable and effective protection against the development and spread of bacteria, viruses, microbes and fungi
- antibacterial protection ensures hygiene, cleanliness and health for people
- perfectly suitable for use in environments with strict hygiene conditions (hospitals, health centers, pharmaceutical facilities, homes for elderly, nursing homes, laboratories, restaurants, hotels, airports, bus and railway stations, business and shopping areas, public institutions ...)
- independent laboratory testings have been carried out in accordance with highest Japanese standards JIS Z 2801
- low cost for providing human health
- design and functionality of antibacterial program MODUL allow easy cleaning and maintenance
- antibacterial buttons, cover plates and sockets are combined with classic mounting frames and switches
- products are labelled on the back with AW (antibacterial white)

**TIPKA 1M** TM11AW

- zamjenjiva tipka 1M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**BUTTON 1M**

- replaceable button 1M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 1M INDIKATOR** TM11AWIN

- zamjenjiva tipka 1M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**BUTTON 1M INDICATOR**

- replaceable button 1M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 2M** TM12AW

- zamjenjiva tipka 2M s nosačem tipke
- upotrebljava se pri nadogradnji sklopke ili tipkala od veličine 1M na veličinu 2M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**BUTTON 2M**

- replaceable button 2M with button carrier
- to upgrade switch or push button from size 1M to size 2M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**TIPKA 2M INDIKATOR** TM12AWIN

- zamjenjiva tipka 2M s nosačem tipke
- upotrebljava se pri nadogradnji sklopke ili tipkala od veličine 1M na veličinu 2M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**BUTTON 2M INDICATOR**

- replaceable button 2M with button carrier
- to upgrade switch or push button from size 1M to size 2M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**SLIJEPI ELEMENT 1M** TM21AW

- slijepi element za popunjavanje praznog mesta
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**BLANK 1M**

- blank modul to fill up empty spaces
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

**SLIJEPI ELEMENT 2M** TM22AW

- slijepi element za popunjavanje praznog mesta
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

**BLANK 2M**

- blank modul to fill up empty spaces
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801





VM10AW

#### UTIČNICA ŠUKO+KS 2P+E 16A 250V~ 2M

- 2P+E šuko
- 16A 250V~, tip VM10
- sukladno normama IEC 60884-1, CEE7
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom
- antibakterijska zaštita uskladena s JIS Z 2801

#### SOCKET SCHUKO+KS 2P+E 16A 250V~ 2M

- 2P+E schuko
- 16A 250V~, type VM10
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm<sup>2</sup>
- shuttered live contacts
- antibacterial protection in accordance with JIS Z 2801



VM11AW

#### UTIČNICA ŠUKO+KS +POKLOPAC 2P+E 16A 250V~ 2M

- 2P+E šuko+poklopac
- 16A 250V~, tip VM11
- sukladno normama IEC 60884-1, CEE7
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom
- antibakterijska zaštita uskladena s JIS Z 2801

#### SOCKET SCHUKO+KS+COVER

- 2P+E schuko+cover
- 16A 250V~, type VM11
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm<sup>2</sup>
- shuttered live contacts
- antibacterial protection in accordance with JIS Z 2801



VM20AW

#### UTIČNICA EURO+KS 2P 10A 250V~ 1M


- 2P Euro
- 10A 250V~, tip VM20
- sukladno normama IEC 60884-1, CEE7
- viđano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- utičnica s integriranim zaštitom
- antibakterijska zaštita uskladena s JIS Z 2801

#### SOCKET EURO+KS 2P 10A 250V~ 1M

- 2P Euro
- 10A 250V~, type VM20
- in accordance with IEC 60884-1, CEE7
- screw contacts 1.5-2.5 mm<sup>2</sup>
- shuttered live contacts
- antibacterial protection in accordance with JIS Z 2801



KM11AW



#### UTIČNICA TV ZAVRŠNA 1dB 1M

- TV završna
- propušta frekvenciju u rasponu 5÷2400 MHz
- prigušenje < 1 dB
- sukladno normi EN 50083-1
- viđano pričvršćivanje
- antibakterijska zaštita uskladena s JIS Z 2801

#### SOCKET TV END-LINE 1dB 1M

- TV end-line
- frequency range 5÷2400 MHz
- reduction < 1 dB
- in accordance with EN 50083-1
- screw contacts
- antibacterial protection in accordance with JIS Z 2801



KM35AW

#### ADAPTER KS 1M

- KS keystone standard pričvršćivanja
- AMP, Avaya, Brandrex, FMT, Mtico, Tyco, ...
- nije ugrađen komunikacijski modul
- antibakterijska zaštita uskladena s JIS Z 2801

#### ADAPTER KS 1M

- KS keystone fixing standard
- AMP, Avaya, Brandrex, FMT, Mtico, Tyco, ...
- communication module not included
- antibacterial protection in accordance with JIS Z 2801





OS20AW

#### OKVIR SOFT 2M

- dekorativni okvir SOFT 2M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

#### COVER PLATE SOFT 2M

- decorative cover plate SOFT 2M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801



OS24AW

#### OKVIR SOFT 2x2M

- dekorativni okvir SOFT 2x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

#### COVER PLATE SOFT 2x2M

- decorative cover plate SOFT 2x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801




OS26AW

#### OKVIR SOFT 3x2M

- dekorativni okvir SOFT 3x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

#### COVER PLATE SOFT 3x2M

- decorative cover plate SOFT 3x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801



OS30AW

#### OKVIR SOFT 3M

- dekorativni okvir SOFT 3M
- antibakterijska zaštita uskladena s JIS Z 2801
- sukladno normi EN 60669-1

#### COVER PLATE SOFT 3M

- decorative cover plate SOFT 3M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801



OS40AW

#### OKVIR SOFT 4M

- dekorativni okvir SOFT 4M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

#### COVER PLATE SOFT 4M

- decorative cover plate SOFT 4M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801



OS70AW

#### OKVIR SOFT 7M

- dekorativni okvir SOFT 7M
- sukladno normi EN 60669-1
- antibakterijska zaštita uskladena s JIS Z 2801

#### COVER PLATE SOFT 7M

- decorative cover plate SOFT 7M
- in accordance with EN 60669-1
- antibacterial protection in accordance with JIS Z 2801

drvo  
wood

WB bambus  
bamboo



WM javor  
maple



WW orah  
walnut










WE wenge  
wenge



**Priroda je jedinstvena i dragocjena, baš kao i naši okviri, među kojima ne postoje dva ista.**  
Reklamacije zbog različitosti izgleda i međusobne raznolikosti drvenih okvira ne uvažavamo.

**Nature is unique and precious, as our decorative cover plates where no two are the same.**  
*Complaints about wooden decorative cover plate's diverse appearance and differentiation cannot be considered.*

## COVER PLATES PURE OP

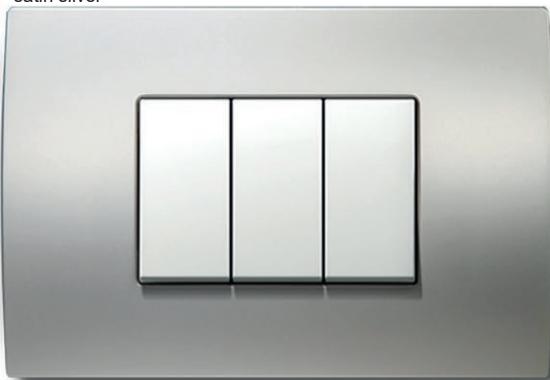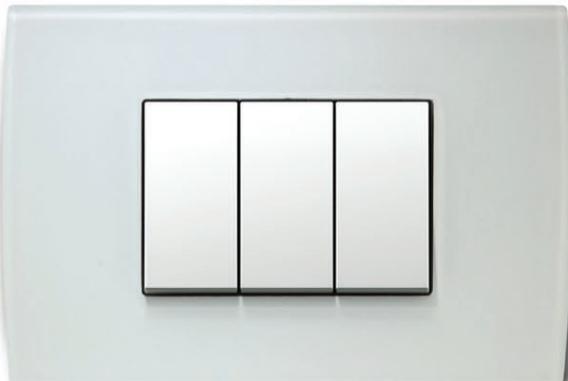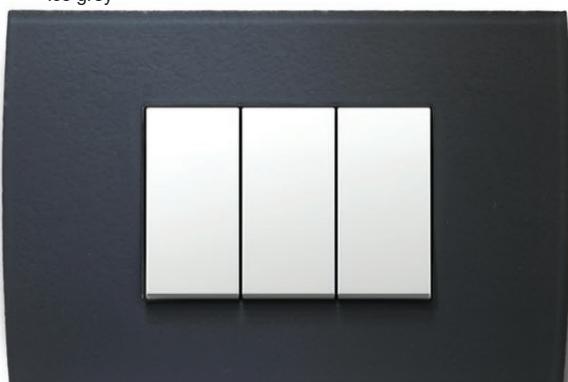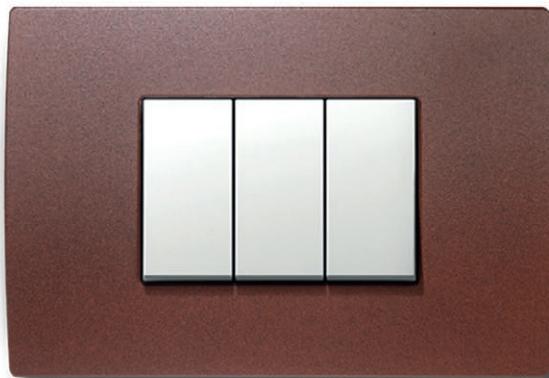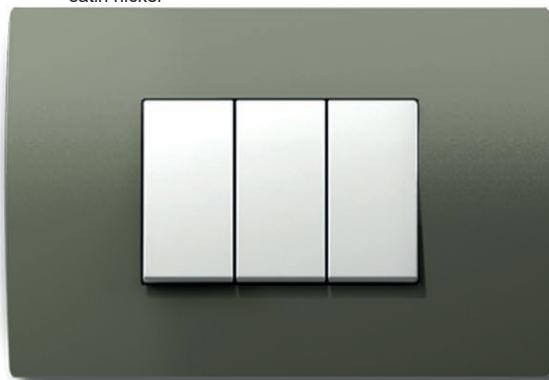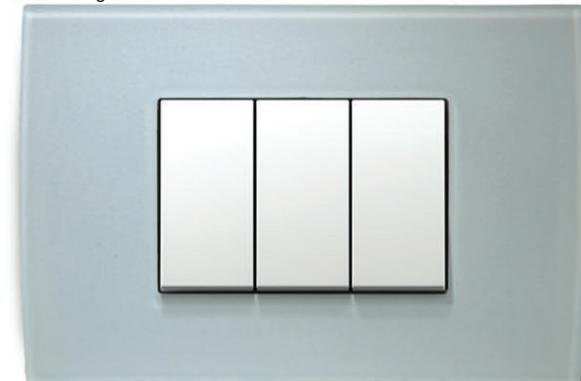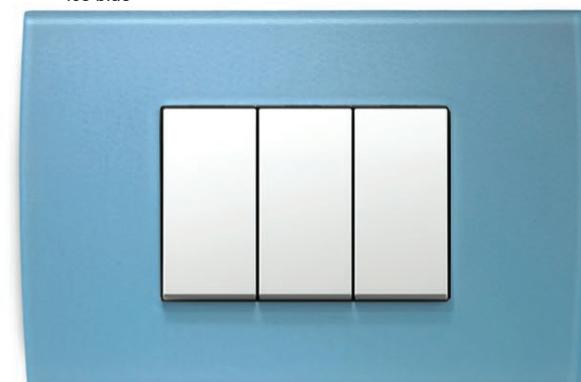metal  
metalMH kovani čelik  
hammered steelMS satenski srebrna  
satin silverstaklo  
glassGW ledeno bijela  
ice whiteGY ledeno siva  
ice greyME lijevano željezo  
etched ironMN satenski poniklani  
satin nickelGG ledeno zelena  
ice greenGB ledeno plava  
ice blue



tip type	naziv description	veličina size	boja colour
OP13	OKVIR PURE COVER PLATE PURE	1/3M	MH kovani čelik hammered steel
OP20	OKVIR PURE COVER PLATE PURE	2M	ME ljevano željezo etched iron
OP23	OKVIR PURE COVER PLATE PURE	2/3M	MS satenski srebrna satin silver
.	.	.	MN satenski poniklani satin nickel
.	.	.	WB bambus bamboo
.	.	.	WW orah walnut
.	.	.	WM javor maple
.	.	.	WE wenge wenge
.	.	.	GW ledeno bijela ice white
.	.	.	GG ledeno zelena ice green
.	.	.	GY ledeno siva ice grey
.	.	.	GB ledeno plava ice blue




OP20MH	OP20WB
OP20ME	OP20WW
OP20MS	OP20WM
OP20MN	OP20WE
	OP20GW
	OP20GG
	OP20GY
	OP20GB

## OKVIR PURE 2M

- dekorativni okvir PURE 2M
- sukladno normi EN 60669-1
- samo u kombinaciji s nosačem NM24 ili NM25

## COVER PLATE PURE 2M

- decorative cover plate PURE 2M
- in accordance with EN 60669-1
- only in combination with mounting frame NM24 or NM25



OP24MH	OP24WB
OP24ME	OP24WW
OP24MS	OP24WM
OP24MN	OP24WE
	OP24GW
	OP24GG
	OP24GY
	OP24GB

## OKVIR PURE 2x2M

- dekorativni okvir PURE 2x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- samo u kombinaciji s nosačem NM24 ili NM25

## COVER PLATE PURE 2x2M

- decorative cover plate PURE 2x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- only in combination with mounting frames NM24 or NM25



OP26MH	OP26WB
OP26ME	OP26WW
OP26MS	OP26WM
OP26MN	OP26WE
	OP26GW
	OP26GG
	OP26GY
	OP26GB

## OKVIR PURE 3x2M

- dekorativni okvir PURE 3x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- samo u kombinaciji s nosačem NM24 ili NM25

## COVER PLATE PURE 3x2M

- decorative cover plate PURE 3x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- only in combination with mounting frames NM24 or NM25



OP28MH	OP28WB
OP28ME	OP28WW
OP28MS	OP28WM
OP28MN	OP28WE
	OP28GW
	OP28GG
	OP28GY
	OP28GB

## OKVIR PURE 4x2M

- dekorativni okvir PURE 4x2M
- vodoravna ili okomita ugradnja
- sukladno normi EN 60669-1
- samo u kombinaciji s nosačem NM24 ili NM25

## COVER PLATE PURE 4x2M

- decorative cover plate PURE 4x2M
- horizontal or vertical mounting
- in accordance with EN 60669-1
- only in combination with mounting frames NM24 or NM25

PURE




OP30MH  
OP30ME  
OP30MS  
OP30MN

OP30WB  
OP30WW  
OP30WM  
OP30WE  
OP30GW  
OP30GG  
OP30GY  
OP30GB

#### OKVIR PURE 3M

- dekorativni okvir PURE 3M  
- sukladno normi EN 60669-1  
**COVER PLATE PURE 3M**  
- decorative cover plate PURE 3M  
- in accordance with EN 60669-1



OP40MH  
OP40ME  
OP40MS  
OP40MN

OP40WB  
OP40WW  
OP40WM  
OP40WE  
OP40GW  
OP40GG  
OP40GY  
OP40GB

#### OKVIR PURE 4M

- dekorativni okvir PURE 4M  
- sukladno normi EN 60669-1  
**COVER PLATE PURE 4M**  
- decorative cover plate PURE 4M  
- in accordance with EN 60669-1



OP70MH  
OP70ME  
OP70MS  
OP70MN

OP70WB  
OP70WW  
OP70WM  
OP70WE  
OP70GW  
OP70GG  
OP70GY  
OP70GB

#### OKVIR PURE 7M

- dekorativni okvir PURE 7M  
- sukladno normi EN 60669-1  
**COVER PLATE PURE 7M**  
- decorative cover plate PURE 7M  
- in accordance with EN 60669-1




OP13MH  
OP13ME  
OP13MS  
OP13MN

OP13WB  
OP13WW  
OP13WM  
OP13WE  
OP13GW  
OP13GG  
OP13GY  
OP13GB

#### OKVIR PURE 1/3M

- dekorativni okvir PURE 1/3M  
- sukladno normi EN 60669-1  
**COVER PLATE PURE 1/3M**  
- decorative cover plate PURE 1/3M  
- in accordance with EN 60669-1



OP23MH  
OP23ME  
OP23MS  
OP23MN


OP23WB  
OP23WW  
OP23WM  
OP23WE  
OP23GW  
OP23GG  
OP23GY  
OP23GB

#### OKVIR PURE 2/3M


- dekorativni okvir PURE 2/3M  
- sukladno normi EN 60669-1  
**COVER PLATE PURE 2/3M**  
- decorative cover plate PURE 2/3M  
- in accordance with EN 60669-1

osnovni  
basic


PW bijela sjajna  
polar white

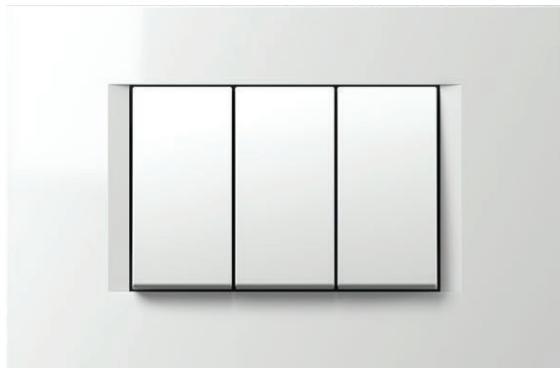


ES srebrna mat  
elox silver

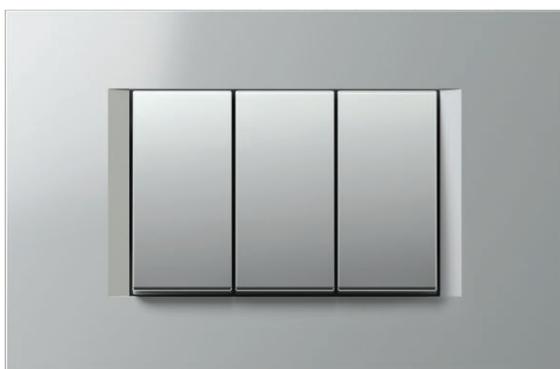

IW bež sjajna  
ivory white

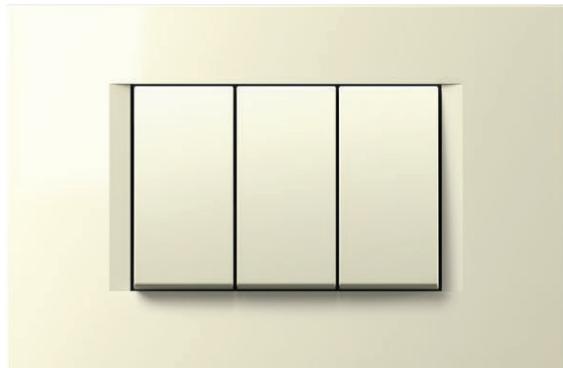


SB crna mat  
soft touch black

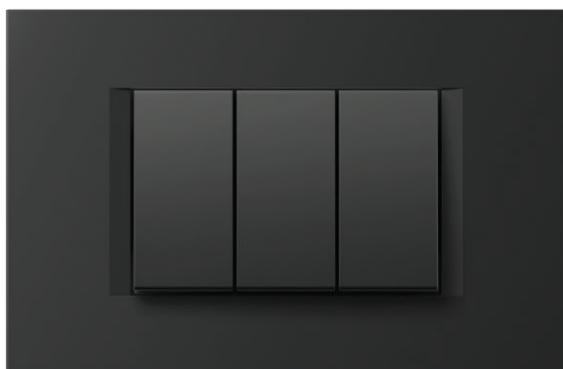


## COVER PLATES LINE OL

dekor  
decor

SG zlatna mat  
sand gold

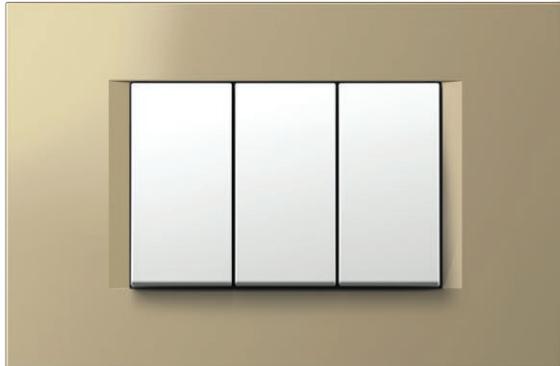


IB plava mat  
impulse blue

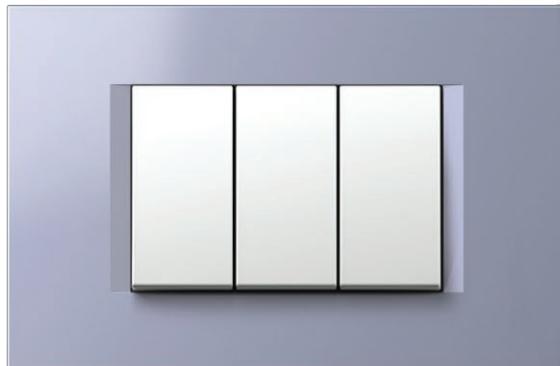


TI titan  
titanium



NB crna sjajna  
night black

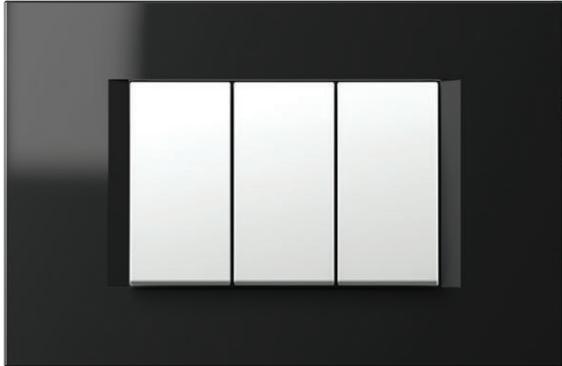


AT antracit  
anthracite

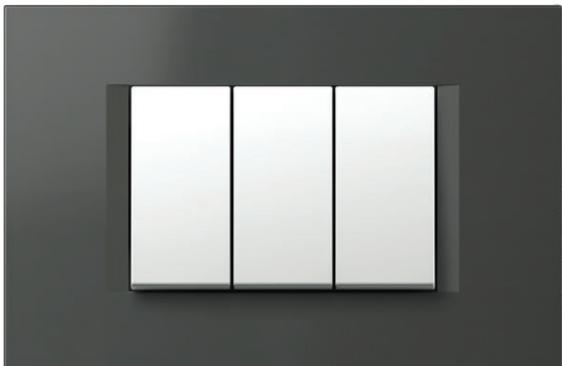

SW kamen bijeli  
stone white



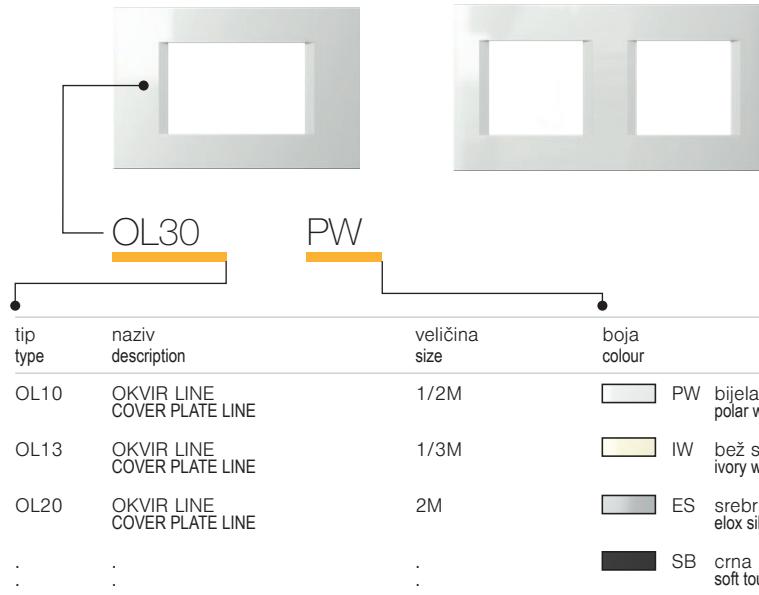

OL20PW	OL20SG
OL20IW	OL20NB
OL20ES	OL20IB
OL20SB	OL20AT
	OL20TI
	OL20SW

## OKVIR LINE 2M


- dekorativni okvir LINE 2M
  - sukladno normi EN 60669-1
- COVER PLATE LINE 2M**
- decorative cover plate LINE 2M
  - in accordance with EN 60669-1



OL24PW	OL24SG
OL24IW	OL24NB
OL24ES	OL24IB
OL24SB	OL24AT
	OL24TI
	OL24SW

## OKVIR LINE 2x2M

- dekorativni okvir LINE 2x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE LINE 2x2M**
- decorative cover plate LINE 2x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1

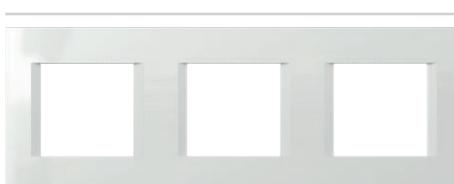

OL26PW	OL26SG
OL26IW	OL26NB
OL26ES	OL26IB
OL26SB	OL26AT
	OL26TI
	OL26SW

## OKVIR LINE 3x2M


- dekorativni okvir LINE 3x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE LINE 3x2M**
- decorative cover plate LINE 3x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1



OL28PW	OL28SG
OL28IW	OL28NB
OL28ES	OL28IB
OL28SB	OL28AT
	OL28TI
	OL28SW

## OKVIR LINE 4x2M

- dekorativni okvir LINE 4x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE LINE 4x2M**
- decorative cover plate LINE 4x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1

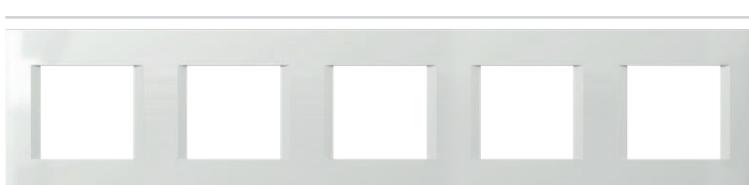

OL29PW	OL29SG
OL29IW	OL29NB
OL29ES	OL29IB
OL29SB	OL29AT
	OL29TI

## OKVIR LINE 5x2M

- dekorativni okvir LINE 5x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE LINE 5x2M**
- decorative cover plate LINE 5x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1

## COVER PLATES LINE OL



OL30PW  
OL30IW  
OL30ES  
OL30SB

OL30SG  
OL30NB  
OL30IB  
OL30AT  
OL30TI  
OL30SW

## OKVIR LINE 3M

- dekorativni okvir LINE 3M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 3M**  
- decorative cover plate LINE 3M  
- in accordance with EN 60669-1




OL40PW  
OL40IW  
OL40ES  
OL40SB

OL40SG  
OL40NB  
OL40IB  
OL40AT  
OL40TI  
OL40SW

## OKVIR LINE 4M

- dekorativni okvir LINE 4M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 4M**  
- decorative cover plate LINE 4M  
- in accordance with EN 60669-1

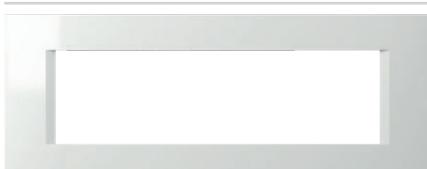

OL70PW  
OL70IW  
OL70ES  
OL70SB

OL70SG  
OL70NB  
OL70IB  
OL70AT  
OL70TI  
OL70SW

## OKVIR LINE 7M

- dekorativni okvir LINE 7M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 7M**  
- decorative cover plate LINE 7M  
- in accordance with EN 60669-1



OL10PW  
OL10IW  
OL10ES  
OL10SB

OL10SG  
OL10NB  
OL10IB  
OL10AT  
OL10TI  
OL10SW

## OKVIR LINE 1/2M

- dekorativni okvir LINE 1/2M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 1/2M**  
- decorative cover plate LINE 1/2M  
- in accordance with EN 60669-1



OL13PW  
OL13IW  
OL13ES  
OL13SB

OL13SG  
OL13NB  
OL13IB  
OL13AT  
OL13TI  
OL13SW

## OKVIR LINE 1/3M

- dekorativni okvir LINE 1/3M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 1/3M**  
- decorative cover plate LINE 1/3M  
- in accordance with EN 60669-1



OL23PW  
OL23IW  
OL23ES  
OL23SB


OL23SG  
OL23NB  
OL23IB  
OL23AT  
OL23TI  
OL23SW

## OKVIR LINE 2/3M


- dekorativni okvir LINE 2/3M  
- sukladno normi EN 60669-1  
**COVER PLATE LINE 2/3M**  
- decorative cover plate LINE 2/3M  
- in accordance with EN 60669-1

osnovni  
basic


PW bijela sjajna  
polar white

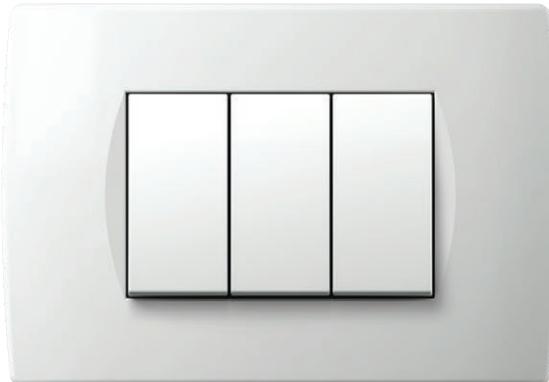


ES srebrna mat  
elox silver

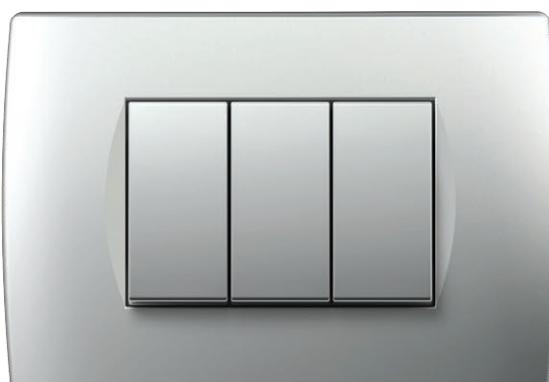

IW bež sjajna  
ivory white

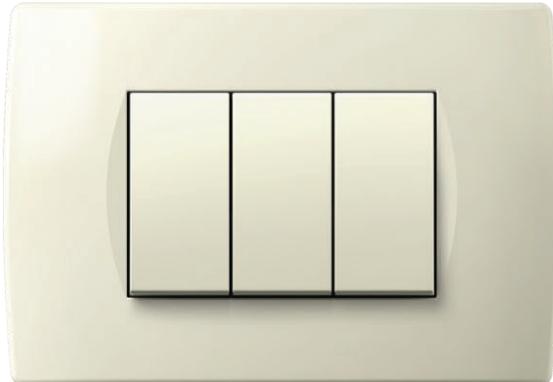


SB crna mat  
soft touch black

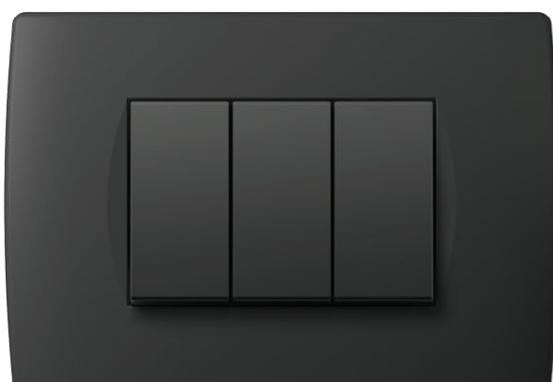

## C O V E R P L A T E S S O F T O S

dekor  
decor

SG zlatna mat  
sand gold

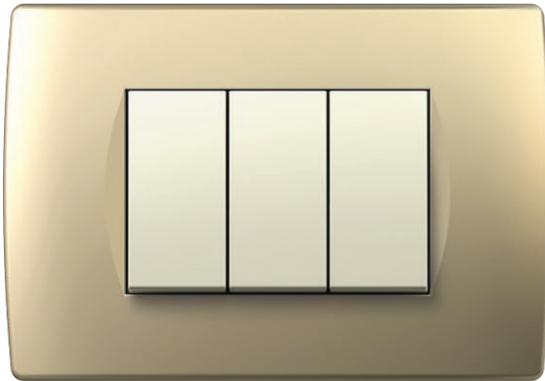


AT antracit  
anthracite



WE wenge  
wenge



NB crna sjajna  
night black

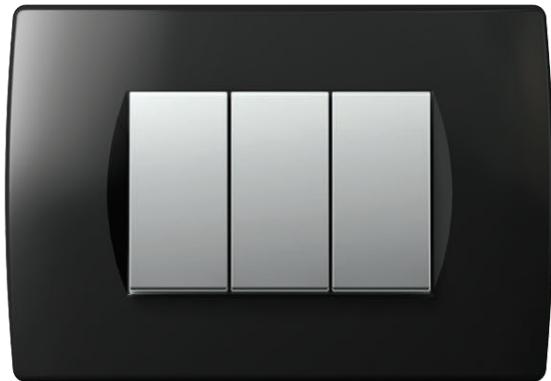


TI titan  
titanium



WW orah  
walnut



MODUL

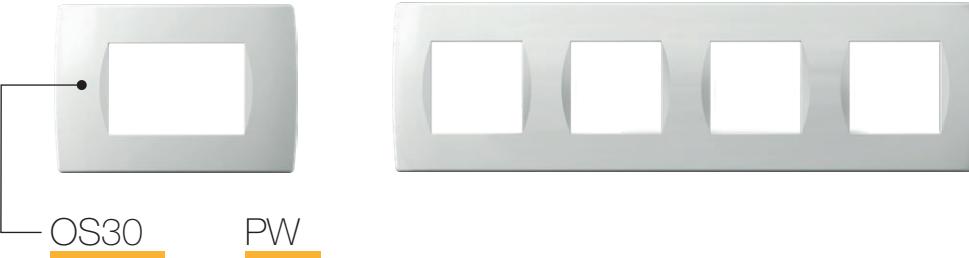

tip type	naziv description	veličina size	boja colour
OS10	OKVIR SOFT COVER PLATE SOFT	1/2M	PW bijela sjajna polar white SG zlatna mat sand gold WW orah walnut
OS13	OKVIR SOFT COVER PLATE SOFT	1/3M	IW bež sjajna ivory white NB crna sjajna night black WE wenge
OS20	OKVIR SOFT COVER PLATE SOFT	2M	ES srebrna mat elox silver AT antracit anthracite
.	.	.	SB crna mat soft touch black TI titan titanium



OS20PW	OS20SG
OS20IW	OS20NB
OS20ES	OS20AT
OS20SB	OS20TI

## OKVIR SOFT 2M

- dekorativni okvir SOFT 2M
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 2M**
- decorative cover plate SOFT 2M
  - in accordance with EN 60669-1



OS24PW	OS24SG
OS24IW	OS24NB
OS24ES	OS24AT
OS24SB	OS24TI

## OKVIR SOFT 2x2M

- dekorativni okvir SOFT 2x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 2x2M**
- decorative cover plate SOFT 2x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1



OS26PW	OS26SG
OS26IW	OS26NB
OS26ES	OS26AT
OS26SB	OS26TI

## OKVIR SOFT 3x2M

- dekorativni okvir SOFT 3x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 3x2M**
- decorative cover plate SOFT 3x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1



OS28PW	OS28SG
OS28IW	OS28NB
OS28ES	OS28AT
OS28SB	OS28TI

## OKVIR SOFT 4x2M

- dekorativni okvir SOFT 4x2M
  - vodoravna ili okomita ugradnja
  - sukladno normi EN 60669-1
- COVER PLATE SOFT 4x2M**
- decorative cover plate SOFT 4x2M
  - horizontal or vertical mounting
  - in accordance with EN 60669-1

## COVER PLATES SOFT OS



OS30PW  
OS30IW  
OS30ES  
OS30SB

OS30SG  
OS30NB  
OS30AT  
OS30TI  
OS30WW  
OS30WE

## OKVIR SOFT 3M

- dekorativni okvir SOFT 3M
- sukladno normi EN 60669-1

## COVER PLATE SOFT 3M

- decorative cover plate SOFT 3M
- in accordance with EN 60669-1



OS40PW  
OS40IW  
OS40ES  
OS40SB

OS40SG  
OS40NB  
OS40AT  
OS40TI  
OS40WW  
OS40WE

## OKVIR SOFT 4M

- dekorativni okvir SOFT 4M
- sukladno normi EN 60669-1

## COVER PLATE SOFT 4M

- decorative cover plate SOFT 4M
- in accordance with EN 60669-1



OS70PW  
OS70IW  
OS70ES  
OS70SB

OS70SG  
OS70NB  
OS70AT  
OS70TI  
OS70WW  
OS70WE

## OKVIR SOFT 7M

- dekorativni okvir SOFT 7M
- sukladno normi EN 60669-1

## COVER PLATE SOFT 7M

- decorative cover plate SOFT 7M
- in accordance with EN 60669-1



OS72PW  
OS72IW  
OS72ES  
OS72SB

OS72AT  
OS72TI

## OKVIR SOFT 2x7M

- dekorativni okvir SOFT 2x7M s natpisnom pločicom
- sukladno normi EN 60669-1

## COVER PLATE SOFT 2x7M

- decorative cover plate SOFT 2x7M with inscription plate
- in accordance with EN 60669-1



OS10PW  
OS10IW  
OS10ES  
OS10SB

OS10SG  
OS10NB  
OS10AT  
OS10TI  
OS10WW  
OS10WE

## OKVIR SOFT 1/2M

- dekorativni okvir SOFT 1/2M
- sukladno normi EN 60669-1

## COVER PLATE SOFT 1/2M

- decorative cover plate SOFT 1/2M
- in accordance with EN 60669-1



OS13PW  
OS13IW  
OS13ES  
OS13SB

OS13SG  
OS13NB  
OS13AT  
OS13TI  
OS13WW  
OS13WE

## OKVIR SOFT 1/3M

- dekorativni okvir SOFT 1/3M
- sukladno normi EN 60669-1

## COVER PLATE SOFT 1/3M

- decorative cover plate SOFT 1/3M
- in accordance with EN 60669-1



OS23PW  
OS23IW  
OS23ES  
OS23SB

OS23SG  
OS23NB  
OS23AT  
OS23TI  
OS23WW  
OS23WE

## OKVIR SOFT 2/3M

- dekorativni okvir SOFT 2/3M
- sukladno normi EN 60669-1

## COVER PLATE SOFT 2/3M

- decorative cover plate SOFT 2/3M
- in accordance with EN 60669-1



## LASERSKO GRAVIRANJE NA OKVIRIMA

- lasersko graviranje proizvoljne grafike
- izrada po narudžbi
- prikladno za okvire OL, OS

## LASER PRINT ON COVER PLATES

- *laser print of any graphics*
- *made on request*
- *suitable for cover plates OL, OS*




## UKRAŠAVANJE OKVIRA

- tekstura i boje po želji kupca
- izrada po narudžbi
- prikladno za okvire OL, OS

## COVER PLATES DECORATIONS


- *customised textures and colours*
- *made on request*
- *suitable for cover plates OL, OS*

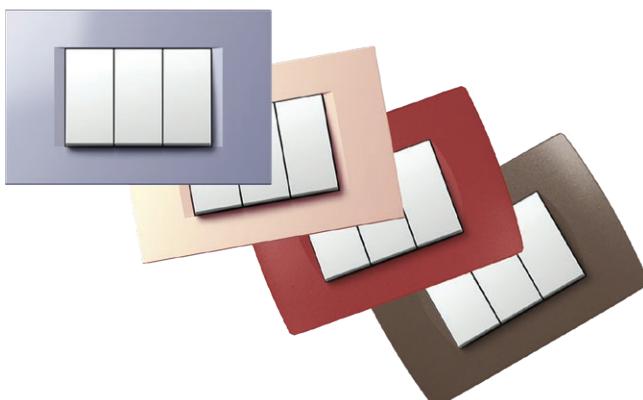

## F R A M E S

line  
A x Bsoft  
A x BPURE  
A x B

2M




80 x 80 mm

84 x 84 mm

93 x 90 mm

2x2M




151 x 80 mm

155 x 84 mm

164 x 90 mm

3x2M




222 x 80 mm

226 x 84 mm

235 x 90 mm

4x2M




293 x 80 mm

297 x 84 mm

304 x 90 mm



3M




122 x 80 mm

122 x 84 mm

134 x 90 mm

4M




149 x 80 mm

144 x 84 mm

157 x 90 mm

7M




207 x 80 mm

212 x 84 mm

224 x 90 mm


2x7M



212 x 158 mm




1/2M



80 x 80 mm

84 x 84 mm

1/3M




122 x 80 mm

122 x 84 mm

134 x 90 mm

2/3M




122 x 80 mm

122 x 84 mm


134 x 90 mm


# K O M B I N A C I J E

## E O D U L

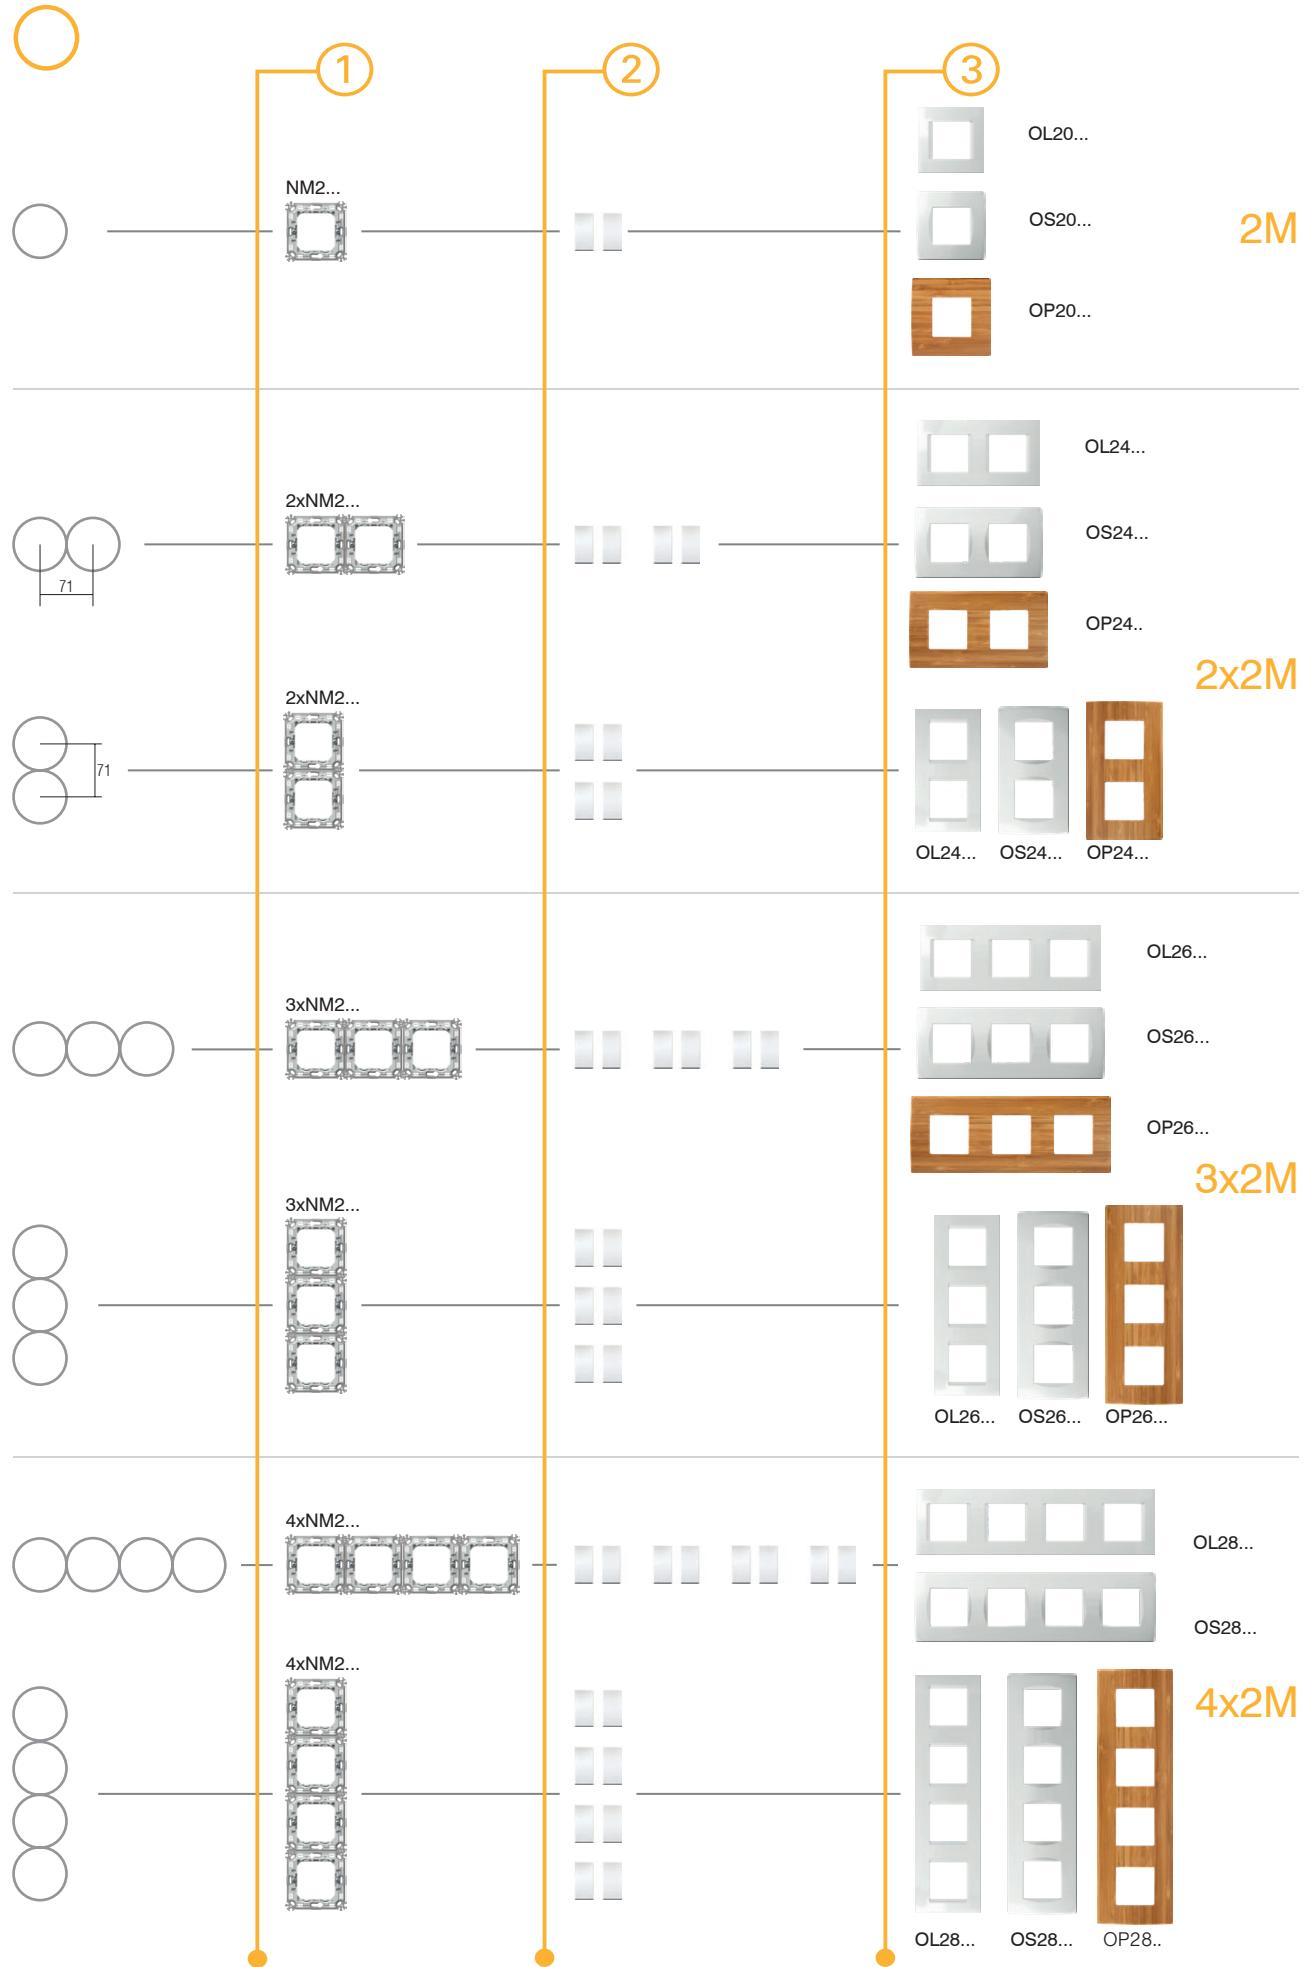

## C O M B I N A T I O N S

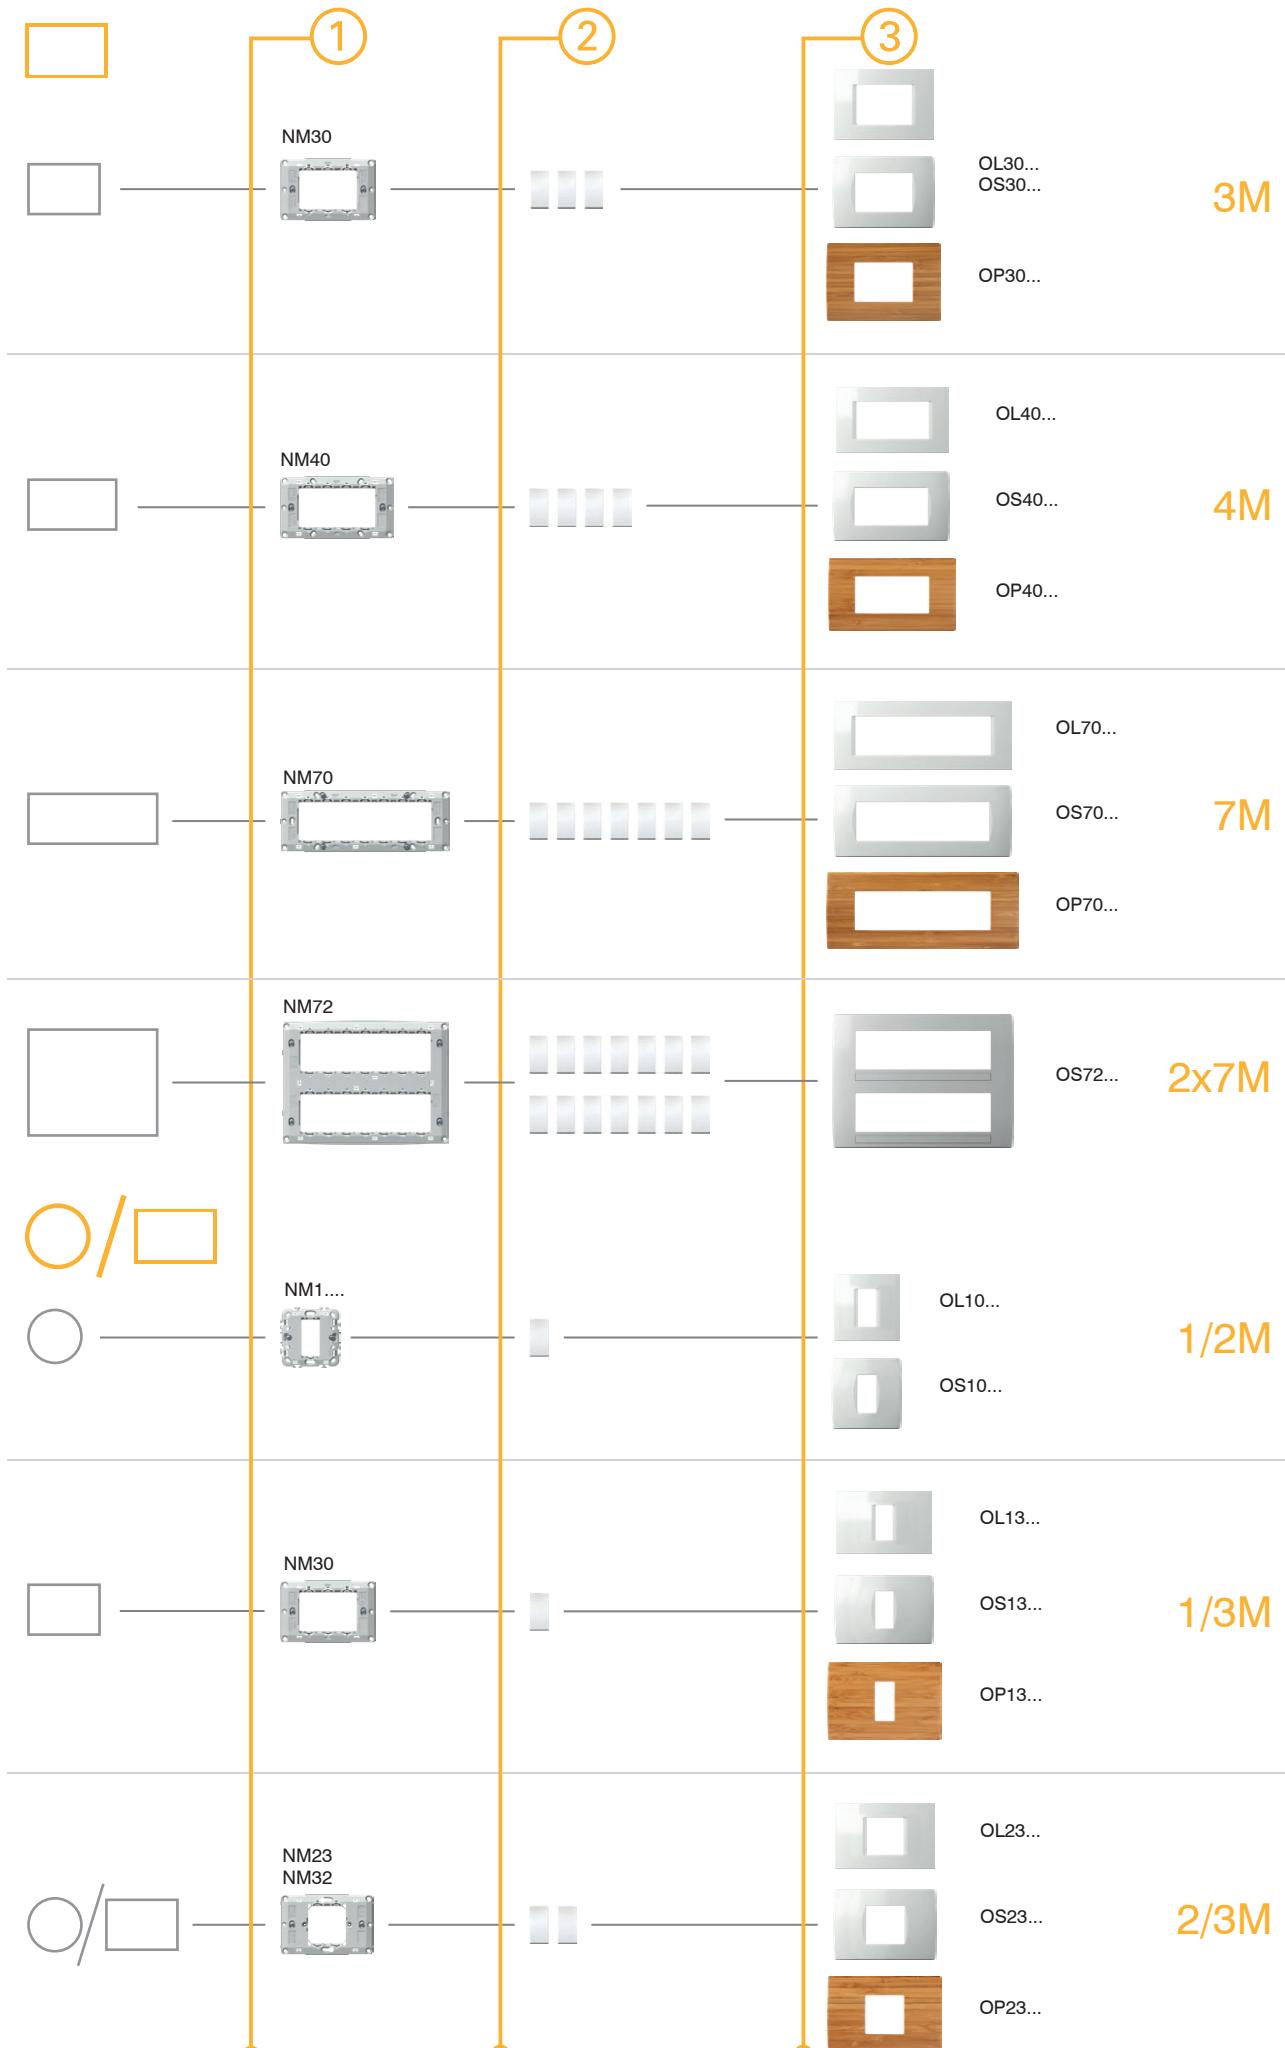



NM30

tip type	naziv description	veličina size
NM10	NOSAČ S NOŽICAMA MOUNTING FRAME WITH CLAWS	1/2M
NM11	NOSAČ BEZ VIJAKA MOUNTING FRAME WITHOUT SCREWS	1/2M
NM20	NOSAČ S NOŽICAMA MOUNTING FRAME WITH CLAWS	2M




NM20

## NOSAČ S NOŽICAMA 2M

- nosač s nožicama 2M
- za ugradnju u kutije Ø60 (DE...) s nožicama
- moguće kombinacije vodoravne ili okomite ugradnje 2x2M, 3x2M i 4x2M
- prikladno za kombiniranje s okvirima LINE i SOFT
- sukladno normi EN 60669-1

## MOUNTING FRAME WITH CLAWS 2M

- mounting frame 2M with claws
- for mounting on boxes Ø60 (DE...) with claws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE and SOFT
- in accordance with EN 60669-1




NM21

## NOSAČ BEZ VIJAKA 2M

- nosač 2M bez vijaka i bez nožica
- za ugradnju u kutije Ø60 (HE..., BE...) s vijcima
- moguće kombinacije vodoravne ili okomite ugradnje 2x2M, 3x2M i 4x2M
- prikladno za kombiniranje s okvirima LINE i SOFT
- sukladno normi EN 60669-1

## MOUNTING FRAME WITHOUT SCREWS 2M

- mounting frame 2M without screws and without claws
- for mounting on boxes Ø60 (HE..., BE...) with screws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates LINE and SOFT
- in accordance with EN 60669-1




NM24

## NOSAČ METALNI S NOŽICAMA 2M

- metalni nosač 2M s nožicama - kruta inačica
- za ugradnju u kutije Ø60 (DE...) s nožicama
- moguće kombinacije vodoravne ili okomite ugradnje 2x2M, 3x2M i 4x2M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

## MOUNTING FRAME METAL WITH CLAWS 2M

- metal mounting frame 2M with claws - stiff version
- for mounting on boxes Ø60 (DE...) with claws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1




NM25

## NOSAČ METALNI BEZ VIJAKA 2M

- metalni nosač 2M bez vijaka i bez nožica – kruta inačica
- za ugradnju u kutije Ø 60 (HE, BE...) vijcima
- moguće kombinacije vodoravne ili okomite ugradnje 2x2M, 3x2M i 4x2M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

## MOUNTING FRAME METAL WITHOUT SCREWS 2M

- metal mounting frame 2M without screws and without claws - stiff version
- for mounting in boxes Ø60 (HE..., BE...) with screws
- possible horizontal or vertical combinations 2x2M, 3x2M and 4x2M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1






NM30

**NOSAČ S VIJCIMA 3M**

- nosač 3M s vijcima
- za ugradnju u pravokutne kutije 3M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 3M**

- mounting frame 3M with screws
- for mounting on rectangular boxes 3M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1




NM40

**NOSAČ S VIJCIMA 4M**

- nosač 4M s vijcima
- za ugradnju u pravokutne kutije 4M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 4M**

- mounting frame 4M with screws
- for mounting on rectangular boxes 4M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1




NM70

**NOSAČ S VIJCIMA 7M**

- nosač 7M s vijcima
- za ugradnju u pravokutne kutije 7M
- prikladno za kombiniranje s okvirima PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 7M**

- mounting frame 7M with screws
- for mounting on rectangular boxes 7M
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1




NM72

**NOSAČ S VIJCIMA 2x7M**

- nosač 2x7M s vijcima
- za ugradnju u pravokutne kutije 2x7M
- prikladan za sastavljanje s okviriom SOFT OS72
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 2x7M**

- mounting frame 2x7M with screws
- for mounting on rectangular boxes 2x7M
- suitable for assembling with cover plate SOFT OS72
- in accordance with EN 60669-1

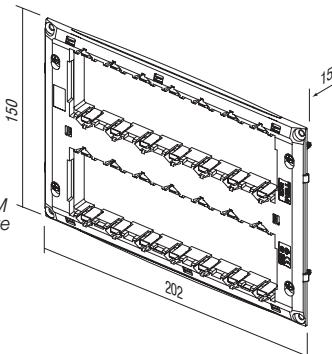





NM10

**NOSAČ S NOŽICAMA 1/2M**

- nosač 1/2M s nožicama
- za ugradnju u kutije Ø60 (DE..) s nožicama
- prikladno za kombiniranje s okvirima LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH CLAWS 1/2M**

- mounting frame 1/2M with claws
- for mounting on boxes Ø60 (DE..) with claws
- suitable for assembling with cover plates LINE and SOFT
- in accordance with EN 60669-1




NM11

**NOSAČ BEZ VIJAKA 1/2M**

- nosač 1/2M bez vijaka i bez nožica
- za ugradnju u kutije Ø60 (HE.., BE..) s vijcima
- prikladno za kombiniranje s okvirima LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITHOUT SCREWS 1/2M**

- mounting frame 1/2M without screws and without claws
- for mounting on boxes Ø60 (HE.., BE..) with screws
- suitable for assembling with cover plates LINE and SOFT
- in accordance with EN 60669-1




NM23

**NOSAČ S NOŽICAMA 2/3M**

- nosač 2/3M s nožicama
- za ugradnju u kutije Ø60 (DE..) s nožicama
- prikladno za kombiniranje s okvirima  
PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH CLAWS 2/3M**

- mounting frame 2/3M with claws
- for mounting on boxes Ø60 (DE..) with claws
- suitable for assembling with cover plates PURE, LINE and SOFT
- in accordance with EN 60669-1




NM32

**NOSAČ S VIJCIMA 2/3M**

- nosač 2/3M s vijcima
- za ugradnju u pravokutne kutije 3M
- prikladno za kombiniranje s okvirima  
PURE, LINE i SOFT
- sukladno normi EN 60669-1

**MOUNTING FRAME WITH SCREWS 2/3M**


- mounting frame 2/3M with screws
- for mounting on rectangular boxes 3M
- suitable for assembling with cover plates  
PURE, LINE and SOFT
- in accordance with EN 60669-1



M O U N T I N G   F R A M E S   N M

E O D U L

**TEM**

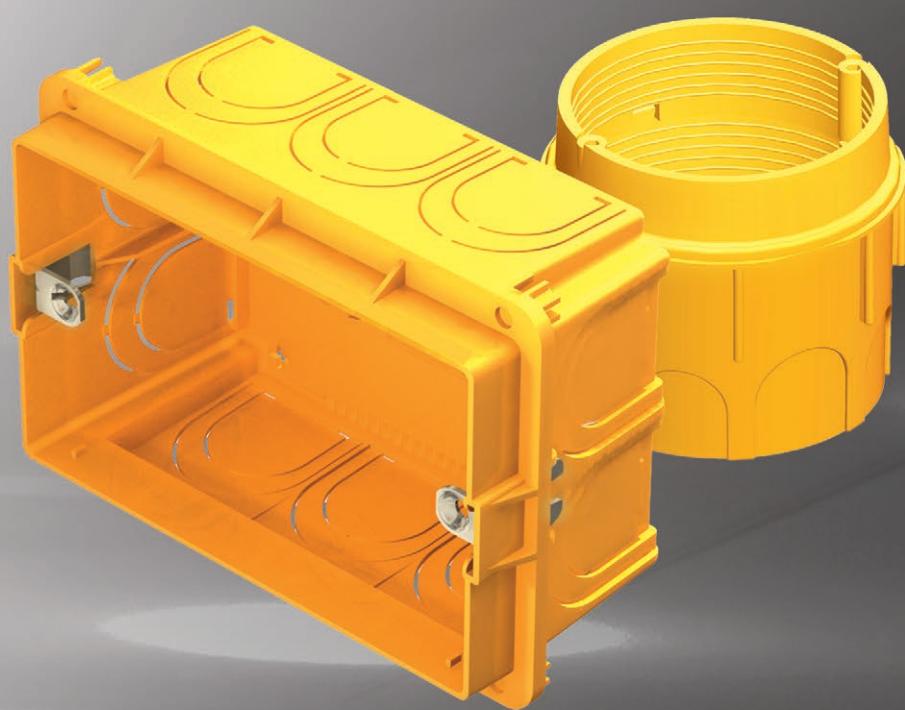

KATALOG /  
CATALOGUE

# KUTIJE



KUTIJE OKRUGLE  
ROUND BOXES



140

KUTIJE PRAVOKUTNE  
RECTANGULAR BOXES



148

KUTIJE PRIKLJUČNE  
JUNCTION BOXES



156

PRIBOR ZA OŽIČENJE  
WIRING ACCESSORIES



158



DE12



HE11



BE10

tip type	naziv description	veličina size
DE10	KUTIJA OKRUGLA ZA ZID OD OPEKE <i>ROUND BOX BRICK</i>	SM60-01
HE10	KUTIJA OKRUGLA ZA ŠUPLJE ZIDOVE <i>ROUND BOX HOLLOW WALL</i>	SM68X40
BE10	KUTIJA OKRUGLA ZA BETON <i>ROUND BOX CONCRETE</i>	
.	.	.
.	.	.
.	.	.


## KUTIJA OKRUGLA ZA ZID OD OPEKE SM60-01



DE10

- Ø60, dubina 40mm
- 650°C, 500V~
- sukladno normi IEC 60670-1
- bez halogena


*ROUND BOX BRICK SM60-01*  
 - Ø60, depth 40mm  
 - 650°C, 500V~  
 - in accordance with IEC 60670-1  
 - halogen free



DE11

- Ø60, dubina 60mm
- 650°C, 500V~
- sukladno normi IEC 60670-1
- bez halogena

*ROUND BOX BRICK DEEP SM60-06*  
 - Ø60, depth 60mm  
 - 650°C, 500V~  
 - in accordance with IEC 60670-1  
 - halogen free



## VEZNI ČLAN SM60-03



DE30

- za okomito povezivanje kutija SM60-06 ili SM60-01 na razmaku od 91 mm
- sukladno normi IEC 60670-1
- bez halogena

*COMBI-CLIP SM60-03*  
 - for vertical fitting of boxes SM60-06 or SM60-01 on distance 91 mm  
 - in accordance with IEC 60670-1  
 - halogen free




## VEZNI ČLAN SM60-04



DE31

- za vodoravno povezivanje kutija SM60-06 ili SM60-01 na razmaku od 71 mm
- sukladno normi IEC 60670-1
- bez halogena

*COMBI-CLIP SM60-04*  
 - for horizontal fitting of boxes SM60-06 or SM60-01 on distance 71mm  
 - in accordance with IEC 60670-1  
 - halogen free



# R O U N D      B O X E S


K U T I J E



DE12

**KUTIJA OKRUGLA ZA ZID OD OPEKE MD65-46**

- Ø65, dubina 46mm
  - 650°C, 500V ~
  - sukladno normi IEC 60670-1
  - bez halogena
- ROUND BOX BRICK MD65-46**
- Ø65, depth 46mm
  - 650°C, 500V ~
  - in accordance with IEC 60670-1
  - halogen free




DE13

**KUTIJA OKRUGLA ZA ZID OD OPEKE DUBOKA MD65-60**

- Ø65/60, dubina 62mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1
- bez halogena

- ROUND BOX BRICK DEEP MD65-60**
- Ø65/60, depth 62mm
  - 650°C, 500V ~
  - in accordance with IEC 60670-1
  - halogen free




DE14

**PRODUŽETAK ZA MD65-46**

- Ø65/60, dubina 17mm
- 650°C, 500V ~
- sukladno normi IEC 60670-1
- bez halogena


- ADDITIONAL PIECE FOR MD65-46**
- Ø65/60, depth 17mm
  - 650°C, 500V ~
  - in accordance with IEC 60670-1
  - halogen free



DE32

- za povezivanje kutija MD65 na razmaku od 71mm
- sukladno normi IEC 60670-1
- bez halogena


- COMBI-CLIP MD65-71**
- for fitting of boxes MD65 on distance 71mm
  - in accordance with IEC 60670-1
  - halogen free



DE33

- za povezivanje kutija MD65 na razmaku od 91mm
- sukladno normi IEC 60670-1
- bez halogena


- COMBI-CLIP MD65-91**
- for fitting of boxes MD65 on distance 91mm
  - in accordance with IEC 60670-1
  - halogen free



DE20

- zaštitni poklopac za kutiju Ø60 za DE10, DE11, DE13, DE14
- sukladno normi IEC 60670-1
- zaštita kutije tijekom žbukanja


- BOX COVER PROTECTIVE 60**
- protective cover for box Ø60 for DE10, DE11, DE13, DE14
  - in accordance with IEC 60670-1
  - box protection during plastering



DE21

- zaštitni poklopac za kutiju Ø65 za DE12
- sukladno normi IEC 60670-1
- zaštita kutije tijekom žbukanja


- BOX COVER PROTECTIVE 65**
- protective cover for box Ø65 for DE12
  - in accordance with IEC 60670-1
  - box protection during plastering




DE22

- dekorativni poklopac za kutije Ø60
- sukladno normi IEC 60670-1
- bez halogena



- BOX COVER DECORATIVE SM60**
- decorative cover for boxes Ø60
  - in accordance with IEC 60670-1
  - halogen free







upute za ugradnju /  
assembly instructions



DE10,11









razmak izmedu kutija /  
distance between boxes: 71mm



razmak izmedu kutija /  
distance between boxes: 91mm

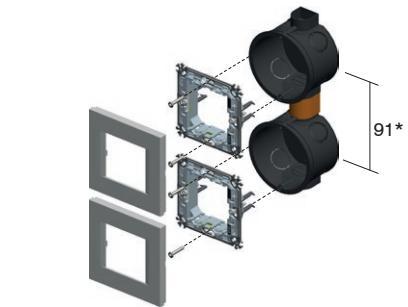


DE12,13

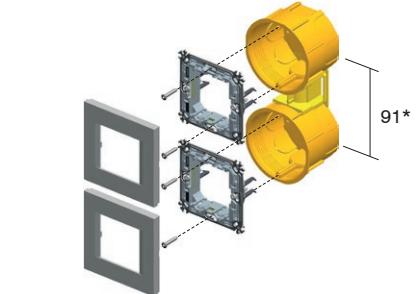

\* za okvire PURE, min. razmak izmedu  
kutija je 100 mm

\* for PURE cover plates the minimum distance between  
boxes is 100mm

## R O U N D      B O X E S



DE10,11

DE12,13

2xDE10,11 + 2xDE31

2xDE12,13 + 1xDE32

2xDE10,11



NM20

NM24

2xNM20

2xNM24

2xDE12,13 + 1xDE32



3xDE10,11 + 3xDE31



3xDE12,13 + 2xDE32



3xDE10,11



3xDE12,13 + 2xDE32



4xDE10,11 + 4xDE31



4xDE12,13 + 3xDE32



4xNM20




4xNM24




4xDE10,11



4xDE12,13 + 3xDE32



4xNM20



4xNM24



## KUTIJA OKRUGLA ZA ŠUPLJE ZIDOVE SM68x40




HE10

- Ø60, dubina 40mm
- ugradni promjer Ø68
- 850°C, 400V~
- sukladno normi IEC 60670-1
- ugradnja s nožicama
- bez halogena

## ROUND BOX HOLLOW WALL SM68x40

- Ø60, depth 40mm
- cutting hole Ø68
- 850°C, 400V~
- in accordance with IEC 60670-1
- mounting with claws
- halogen free



## KUTIJA OKRUGLA ZA ŠUPLJE ZIDOVE SM68x55




HE11

- Ø60, dubina 55mm
- ugradni promjer Ø68
- 850°C, 400V~
- sukladno normi IEC 60670-1
- ugradnja s nožicama
- bez halogena

## ROUND BOX HOLLOW WALL SM68x55

- Ø60, depth 55mm
- cutting hole Ø68
- 850°C, 400V~
- in accordance with IEC 60670-1
- mounting with claws
- halogen free



## KUTIJA OKRUGLA ZA BETON




BE10

- Ø60 mm, dubina 49 mm
- 650°C, 500V~
- sukladno normi IEC 60670-1
- bez halogena

## ROUND BOX CONCRETE

- Ø60mm, depth 49mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free



## KUTIJA OKRUGLA ZA BETON DUBOKA




BE11

- Ø60 mm, dubina 58mm
- 650°C, 500V~
- sukladno normi IEC 60670-1
- bez halogena

## ROUND BOX CONCRETE DEEP

- Ø60mm, depth 58mm
- 650°C, 500V~
- in accordance with IEC 60670-1
- halogen free



## NOSAČ KUTIJE ZA BETON




BE20

- za učvršćivanje doze dilatacijskim profilom BM82 u suprotni zid
- sukladno normi IEC 60670-1
- bez halogena

## COUNTER BOX SUPPORT CONCRETE

- to support concrete boxes with discance profile BM82 for extreme loads
- in accordance with IEC 60670-1
- halogen free



## UVODNICA ZA KUTIJU ZA BETON 16




BE21

- za učvršćivanje instalacijske cijevi
- sukladno normi IEC 60670-1
- bez halogena

## PIPE STOPPER CONCRETE BOX 16

- for firming installation pipe to box
- in accordance with IEC 60670-1
- halogen free



## R O U N D

## B O X E S

šuplji zidovi / hollow walls





beton / concrete




upute za ugradnju /  
assembly instructions


HE10,11








razmak izmedu kutija /  
distance between boxes: 71mm

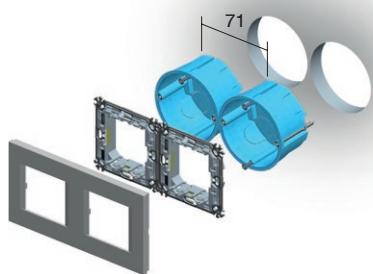

razmak izmedu kutija /  
distance between boxes: 91mm

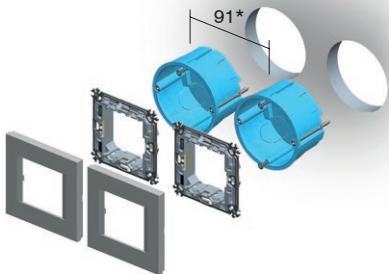

BE10

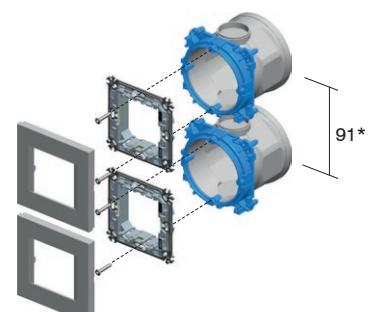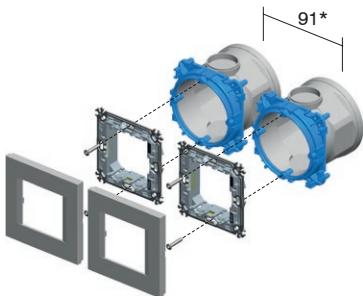

\* za okvire PURE, min. razmak izmedu kutija je 100 mm


\* for PURE cover plates the minimum distance between boxes is 100mm

K U T I J E

šuplji zidovi / hollow walls



beton / concrete



HE10,11



BE10,11



NM21



NM25



2M

HE10,11



BE10,11



1/2M

2xHE10,11



2xBE10,11



2xNM21



2xNM25



2x2M

2xHE10,11



2xNM21 2xNM25



3xHE10,11



3xBE10,11



3xNM21



3xNM25



3x2M

3xHE10,11



3xNM21 3xNM25



4xHE10,11



4xBE10,11



4xNM21



4xNM25




4x2M

4xHE10,11



4xNM21




4xNM25

## R O U N D      B O X E S




upute za ugradnju /  
assembly instructions


1

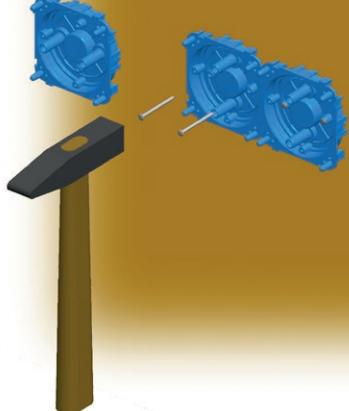

3

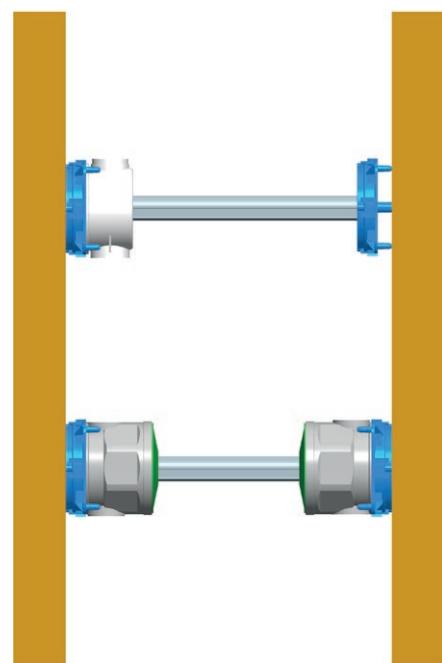

2

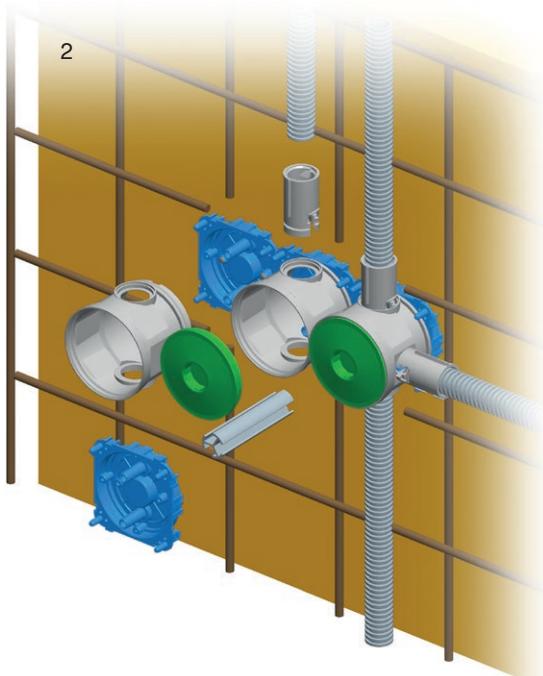

4



K U T I J E



DM30



HM30



BM30


tip type	naziv description	veličina size
DM30	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM3 <i>RECTANGULAR BOX BRICK</i>	
HM30	KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM3 <i>RECTANGULAR BOX HOLLOW WALL</i>	
BM30	KUTIJA PRAVOKUTNA ZA BETON <i>RECTANGULAR BOX CONCRETE</i>	BM3
.	.	.
.	.	.
.	.	.



DM30

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM3


- veličina 3M, dubina 49 mm
  - 650°C, 400V ~
  - sukladno normi IEC 60670-1
  - bez halogena
- RECTANGULAR BOX BRICK PM3*
- size 3M, depth 49mm
  - 650°C, 400V~
  - in accordance with IEC 60670-1
  - halogen free



DM31

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM3-65


- veličina 3M, dubina 65mm
  - 650°C, 400V ~
  - sukladno normi IEC 60670-1
  - bez halogena
- RECTANGULAR BOX BRICK PM3-65*
- size 3M, depth 65mm
  - 650°C, 400V~
  - in accordance with IEC 60670-1
  - halogen free



DM40

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM4


- veličina 4M, dubina 49 mm
  - 650°C, 400V ~
  - sukladno normi IEC 60670-1
  - bez halogena
- RECTANGULAR BOX BRICK PM4*
- size 4M, depth 49mm
  - 650°C, 400V~
  - in accordance with IEC 60670-1
  - halogen free



DM41

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM4-65

- veličina 4M, dubina 65mm
  - 650°C, 400V ~
  - sukladno normi IEC 60670-1
  - bez halogena
- RECTANGULAR BOX BRICK PM4-65*
- size 4M, depth 65mm
  - 650°C, 400V~
  - in accordance with IEC 60670-1
  - halogen free



## RECTANGULAR BOXES

## KUTIJE




DM70

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM7

- veličina 7M, dubina 49 mm
- $650^{\circ}\text{C}$ , 400V ~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX BRICK PM7

- size 7M, depth 49mm
- $650^{\circ}\text{C}$ , 400V~
- in accordance with IEC 60670-1
- halogen free




DM71

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM7-65

- veličina 7M, dubina 65mm
- $650^{\circ}\text{C}$ , 400V ~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX BRICK PM7-65

- size 7M, depth 65mm
- $650^{\circ}\text{C}$ , 400V~
- in accordance with IEC 60670-1
- halogen free




DM72

## KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM72-65

- veličina 2x7M, dubina 64mm
- $650^{\circ}\text{C}$ , 400V ~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX BRICK PM72-65

- size 2x7M, depth 64mm
- $650^{\circ}\text{C}$ , 400V~
- in accordance with IEC 60670-1
- halogen free

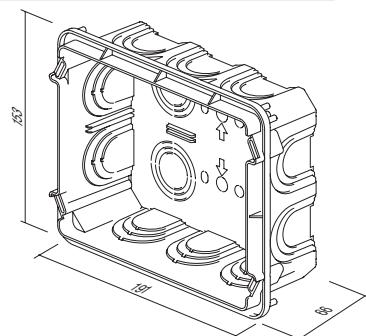




DM80

## VEZNI ČLAN KUTIJE PM

- za okomito (A) i vodoravno (B) povezivanje kutija PM3, PM4 i PM7
- prikladan za dekorativne okvire Line i Soft (nije prikladan za PURE)

## DISTANCE PIECE FOR BOX PM

- for vertical (A) and horizontal (B) fitting of boxes PM3, PM4 and PM7
- suitable for Line and Soft decorative cover plates (not for PURE)

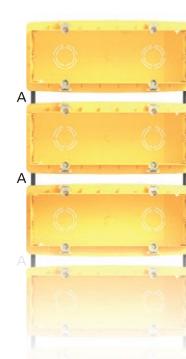

## POKLOPAC KUTIJE ZAŠTITNI PM3




DM33

- zaštitni poklopac za kutiju PM3
- sukladno normi IEC 60670-1
- bez halogena
- zaštita kutije tijekom žbukanja

*BOX COVER PROTECTIVE PM3*

- protective cover for box PM3
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



## POKLOPAC KUTIJE DEKORATIVNI PM3




DM34

- dekorativni poklopac za kutije 3M
- vijci priloženi
- sukladno normi IEC 60670-1
- bez halogena

*BOX COVER DECORATIVE PM3*

- decorative cover for boxes 3M
- screws are included
- in accordance with IEC 60670-1
- halogen free



## POKLOPAC KUTIJE ZAŠTITNI PM4




DM43

- zaštitni poklopac za kutiju PM4
- sukladno normi IEC 60670-1
- bez halogena
- zaštita kutije tijekom žbukanja

*BOX COVER PROTECTIVE PM4*

- protective cover for box PM4
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



## POKLOPAC KUTIJE DEKORATIVNI PM4




DM44


- dekorativni poklopac za kutije 4M
- vijci priloženi
- sukladno normi IEC 60670-1
- bez halogena

*BOX COVER DECORATIVE PM4*

- decorative cover for boxes 4M
- screws are included
- in accordance with IEC 60670-1
- halogen free



## POKLOPAC KUTIJE ZAŠTITNI PM7




DM73

- zaštitni poklopac za kutiju PM7
- sukladno normi IEC 60670-1
- bez halogena
- zaštita kutije tijekom žbukanja

*BOX COVER PROTECTIVE PM7*

- protective cover for box PM7
- in accordance with IEC 60670-1
- halogen free
- box protection during plastering



## POKLOPAC KUTIJE DEKORATIVNI PM7




DM74

- dekorativni poklopac za kutije 7M
- vijci priloženi
- sukladno normi IEC 60670-1
- bez halogena

*BOX COVER DECORATIVE PM7*

- decorative cover for boxes 7M
- screws are included
- in accordance with IEC 60670-1
- halogen free



## RECTANGULAR BOXES


## POKLOPAC KUTIJE DEKORATIVNI PM72

DM75

- dekorativni poklopac za kutije 2x7M
- vijci priloženi
- sukladno normi IEC 60670-1

## BOX COVER DECORATIVE PM72

- decorative cover for boxes 2x7M
- screws are included
- in accordance with IEC 60670-1

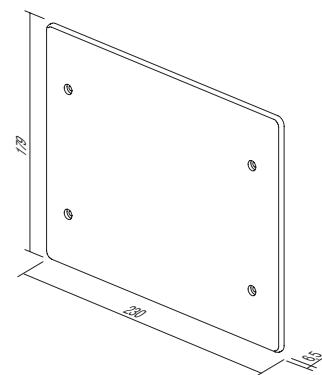

KUTIJE




HM30

## KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM3

- veličina 3M, dubina 49 mm
- ugradni promjer 2xØ68/45mm
- 850°C, 400V~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX HOLLOW WALL VM3

- size 3M, depth 49mm
- cutting hole 2xØ68/45mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM40

## KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM4

- veličina 4M, dubina 49 mm
- ugradni promjer 2xØ68/70mm
- 850°C, 400V~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX HOLLOW WALL VM4

- size 4M, depth 49mm
- cutting hole 2xØ68/70mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM70

## KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM7

- veličina 7M, dubina 49 mm
- ugradni promjer 2xØ68/120mm
- 850°C, 400V~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX HOLLOW WALL VM7

- size 7M, depth 49mm
- cutting hole 2xØ68/120mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free




HM72

## KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM72

- veličina 2x7M, dubina 63mm
- 850°C, 400V~
- sukladno normi IEC 60670-1
- bez halogena

## RECTANGULAR BOX HOLLOW WALL VM72

- size 2x7M, depth 63mm
- 850°C, 400V~
- in accordance with IEC 60670-1
- halogen free

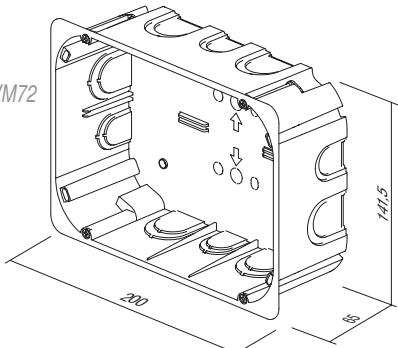

# RECTANGULAR BOXES

KUTIJE




BM30

**PRAVOKUTNA KUTIJA ZA BETON BM3**

- veličina 3M, dubina 60mm
- $650^{\circ}\text{C}$ , 400V
- sukladno normi IEC 60670-1
- bez halogena

**RECTANGULAR BOX CONCRETE BM3**

- size 3M, depth 60mm
- $650^{\circ}\text{C}$ , 400V
- in accordance with IEC 60670-1
- halogen free




BM40

**PRAVOKUTNA KUTIJA ZA BETON BM4**

- veličina 4M, dubina 60mm
- $650^{\circ}\text{C}$ , 400V
- sukladno normi IEC 60670-1
- bez halogena

**RECTANGULAR BOX CONCRETE BM4**

- size 4M, depth 60mm
- $650^{\circ}\text{C}$ , 400V
- in accordance with IEC 60670-1
- halogen free




BM70

**PRAVOKUTNA KUTIJA ZA BETON BM7**

- veličina 7M, dubina 60mm
- $650^{\circ}\text{C}$ , 400V
- sukladno normi IEC 60670-1
- bez halogena

**RECTANGULAR BOX CONCRETE BM7**

- size 7M, depth 60mm
- $650^{\circ}\text{C}$ , 400V
- in accordance with IEC 60670-1
- halogen free




BM80

**PRIČVRŠNI KOMBI-DRŽAČ BM**

- za brzo pričvršćivanje pravokutnih kutija BM na armiranu betonsku šipku
- prikladno za šipku promjera do Ø8 mm

**FIXING COMBI-CLIP BM**

- for fast fixation of BM rectangular boxes on reinforcing bar
- suitable for bar diameter up to Ø8mm




BM82

**VEZNI PROFIL ZA KUTIJE BM**

- za podupiranje kutija BM s odgovarajućom kutijom na nasuprotnom zidu
- duljina l = 1 m, promjer Ø20 mm

**DISTANCE PROFIL FOR BOXES BM**

- to support boxes BM with counter box support on opposite wall
- length l=1m, diameter Ø20mm






cigla / brick



šuplji zidovi / hollow walls




beton / concrete

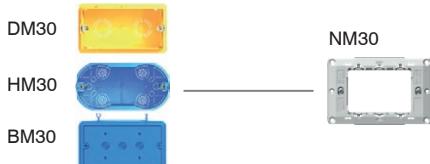


3M




4M

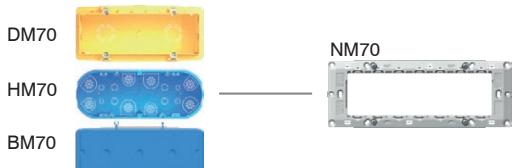

7M

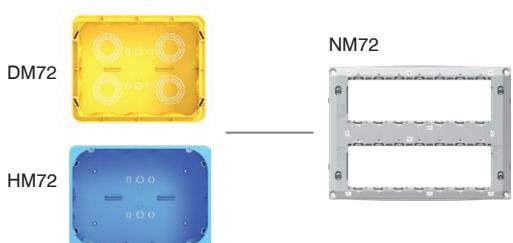


2x7M




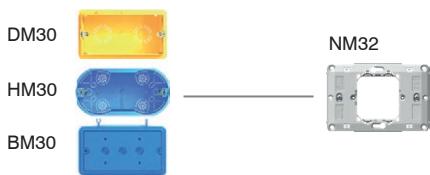


2/3M

## RECTANGULAR BOXES

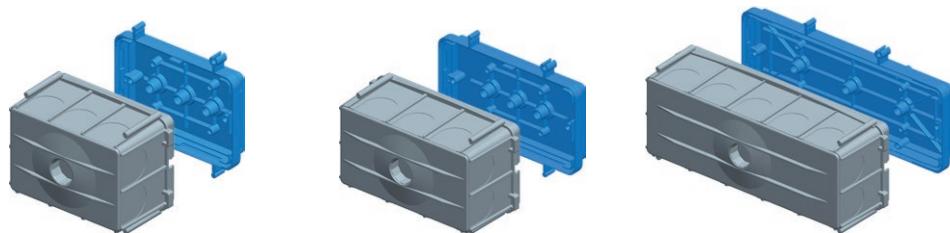

upute za ugradnju /  
assembly instructions

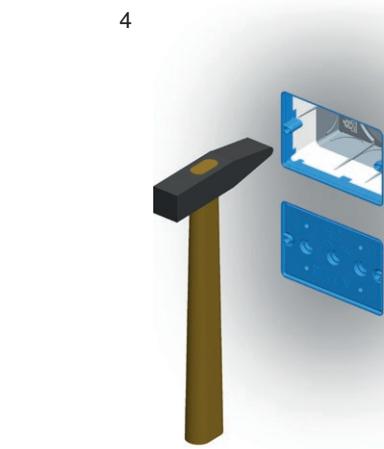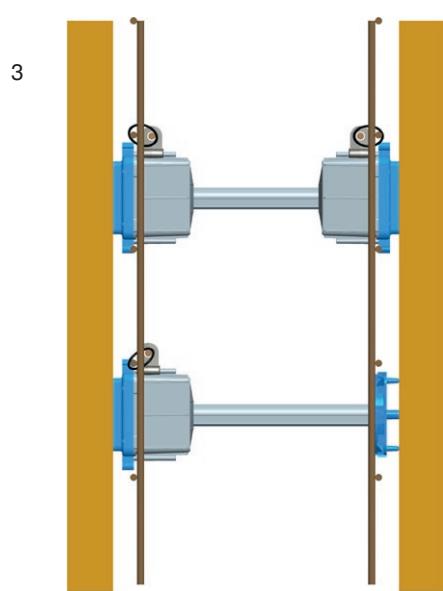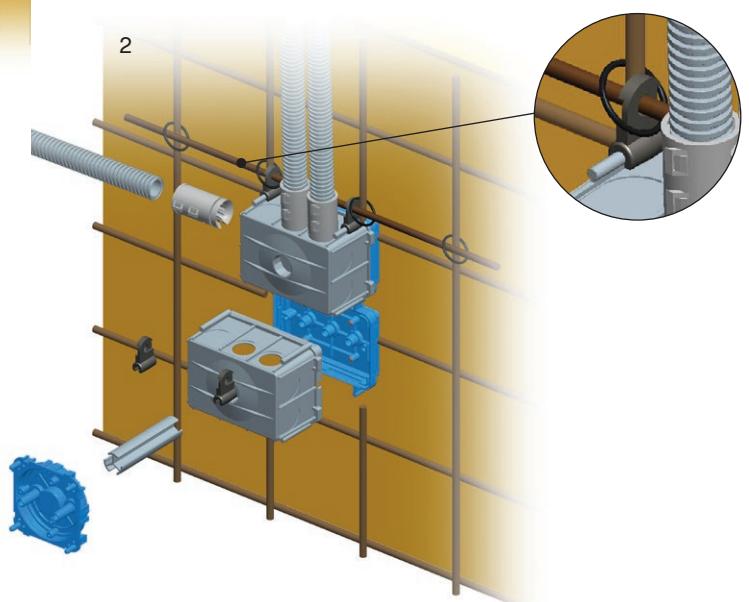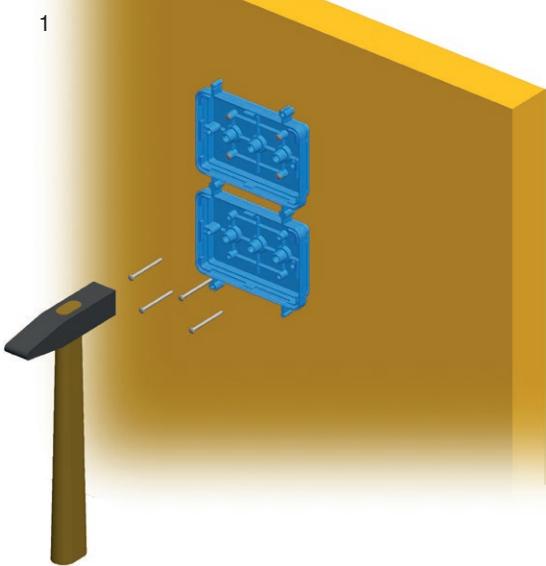

K U T - J E

# K U T I J E P R I K L J U Č N E

## K U T I J E




DW10

### KUTIJA PRIKLJUČNA OKRUGLA ZA ZID OD OPEKE DSM78

- Ø78, dubina 40mm
- $650^{\circ}\text{C}$ , 500V
- sukladno normama IEC 60670-1 i IEC 60670-22
- bez halogena

#### CONNECTION ROUND BOX BRICK DSM78

- Ø78, depth 40mm
- $650^{\circ}\text{C}$ , 500V
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free




HW10

### KUTIJA PRIKLJUČNA OKRUGLA ZA ŠUPLJE ZIDOVE SM78x45

- Ø78, dubina 45mm
- ugradni promjer Ø80
- $850^{\circ}\text{C}$ , 400V
- sukladno normama IEC 60670-1 i IEC 60670-22
- ugradnja s nožicama
- bez halogena

#### CONNECTION ROUND BOX HOLLOW WALL SM78x45

- Ø78, depth 45mm
- cutting hole Ø80
- $850^{\circ}\text{C}$ , 400V
- in accordance with IEC 60670-1 and IEC 60670-22
- mounting with claws
- halogen free




DE23

### POKLOPAC KUTIJE DEKORATIVNI SM78

- dekorativni poklopac za kutije Ø78
- sukladno normama IEC 60670-1 i IEC 60670-22
- bez halogena

#### BOX COVER DECORATIVE SM78

- decorative cover for boxes Ø78
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free




DE24

### POKLOPAC KUTIJE ZAŠTITNI 78

- zaštitni poklopac za kutije Ø78
- sukladno normama IEC 60670-1 i IEC 60670-22
- bez halogena

#### BOX COVER PROTECTIVE 78

- protective cover for box Ø78
- in accordance with IEC 60670-1 and IEC 60670-22
- halogen free




HW20

### KUTIJA PRIKLJUČNA ČETVRTASTA ZA ZID OD OPEKE SM105x105

- veličina 105x105mm, dubina 50mm
- ugradnja u rupu prema priloženoj šabloni
- $850^{\circ}\text{C}$ , 400V
- sukladno normama IEC 60670-1 i IEC 60670-22
- ugradnja s nožicama
- bez halogena


#### CONNECTION SQUARE BOX BRICK SM105x105

- size 105x105mm, depth 50mm
- cutting hole according to attached template
- $850^{\circ}\text{C}$ , 400V
- in accordance with IEC 60670-1 and IEC 60670-22
- mounting with claws
- halogen free



## J U N C T I O N     B O X E S

K U T - J E



UW10

tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
UW10	JEDNOREDNE STEZALJKE 1 ROW TERMINAL BLOCKS	2x2.5mm <sup>2</sup>	10P	<input checked="" type="checkbox"/> TS transparentna transparent
UW11	JEDNOREDNE STEZALJKE 1 ROW TERMINAL BLOCKS	2x4mm <sup>2</sup>	10P	<input checked="" type="checkbox"/> CO boja colour
UW12	JEDNOREDNE STEZALJKE 1 ROW TERMINAL BLOCKS	2x6mm <sup>2</sup>	10P	<input type="checkbox"/> WH bijela white
.	.	.	.	<input type="checkbox"/> GY siva grey
.	.	.	.	

## JEDNOREDNE STEZALJKE ZATVORENE




- 450V~; 2x2.5mm<sup>2</sup> ÷ 2x6mm<sup>2</sup>
- termoplast PC, prozirne
- broj polova: 10

## 1 ROW TERMINAL BLOCKS CLOSED

- 450V~; 2x2.5mm<sup>2</sup> ÷ 2x6mm<sup>2</sup>
- thermoplast PC, transparent
- number of poles: 10

UW10TS	(NS12)	2x2.5mm <sup>2</sup>	10P
UW11TS	(NS12)	2x4mm <sup>2</sup>	10P
UW12TS	(NS12)	2x6mm <sup>2</sup>	10P



	A	B	C	D
2x2.5 □	110	17.5	17.5	11
2x4 □	128	21	19	12.5
2x6 □	146	21.5	22	15

## JEDNOREDNE STEZALJKE




- 450V~; 2x2.5mm<sup>2</sup> ÷ 2x6mm<sup>2</sup>
- termoplast PA
- dostupne u raznim bojama
- broj polova: 12

## 1 ROW TERMINAL BLOCKS


- 450V~; 2x2.5mm<sup>2</sup> ÷ 2x6mm<sup>2</sup>
- thermoplast PA
- available in different colours
- number of poles: 12

UW15CO	(NS12)	2x2.5mm <sup>2</sup>	12P
UW16CO	(NS12)	2x4mm <sup>2</sup>	12P
UW17CO	(NS12)	2x6mm <sup>2</sup>	12P



	A	B	C	D
2x2.5 □	110	16.4	9	10
2x4 □	118.8	19	10	10
2x6 □	129.8	21.3	11	11.8


## DVOREDNE STEZALJKE PP



- 450 V~; 1 mm<sup>2</sup> ÷ 16 mm<sup>2</sup>
- termoplast polipropilen PP, bijele
- za upotrebu do 80 °C
- broj polova: 12


## 2 ROW TERMINAL BLOCKS PP

- 450V~; 1mm<sup>2</sup> ÷ 16mm<sup>2</sup>
- thermoplast polypropylene PP, white
- for temperatures up to 80°C
- number of poles: 12



	A	B	C	D	E
UW29WHPP	1.0-4.0mm <sup>2</sup>	24 A	450 V		94,9
UW30WHPP	1.5-6.0mm <sup>2</sup>	32 A	450 V		116,5
UW31WHPP	2.5-10mm <sup>2</sup>	41 A	450 V		133,8
UW32WHPP	4-16mm <sup>2</sup>	76 A	450 V		174,5
				20,7	25
				15	11


## DVOREDNE STEZALJKE PA



- 450 V~; 1 mm<sup>2</sup> ÷ 16 mm<sup>2</sup>
- termoplast poliamid PA, bijele
- za upotrebu do 110 °C
- broj polova: 12

## 2 ROW TERMINAL BLOCKS PA

- 450V~; 1mm<sup>2</sup> ÷ 16mm<sup>2</sup>
- thermoplast polyamide PA, white
- for temperatures up to 110°C
- number of poles: 12

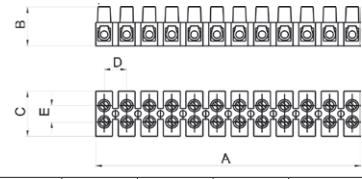

UW25WHPA	1.0-4.0mm <sup>2</sup>	24 A	450 V		93,6	13,4	16,2	8	6,4
UW26WHPA	1.5-6.0mm <sup>2</sup>	32 A	450 V		117	15	18,6	10	7,3
UW27WHPA	2.5-10mm <sup>2</sup>	41 A	450 V		132,8	17,3	22,2	11,5	10
UW28WHPA	4-16mm <sup>2</sup>	76 A	450 V		173,9	20,8	25,2	15	11

A	B	C	D	E
93,6	13,4	16,2	8	6,4
117	15	18,6	10	7,3
132,8	17,3	22,2	11,5	10
173,9	20,8	25,2	15	11

## BEZVIJČANE REDNE STEZALJKE



- 24A 450V~, termoplast PA, sive
- broj polova: 3÷8
- bezvijčani kontakti 0,5 ÷ 1,5 mm<sup>2</sup>, za tvrde žice
- sukladno normi EN 60998-1

## PLUG-IN WIRE CONNECTORS

- 24A 450V~, thermoplast PA, grey
- number of poles: 3÷8
- plug-in contacts 0.5÷1.5mm<sup>2</sup>, for rigide wires
- in accordance with EN 60998-1



UW40GY	PC153	1.5mm <sup>2</sup>	3P	3P	A	12	B	18	C
UW41GY	PC155	1.5mm <sup>2</sup>	5P	5P	5P	17	18	9	9
UW42GY	PC158	1.5mm <sup>2</sup>	8P	8P	26	18			9

A	B	C
12	18	9
17	18	9
26	18	9

## BEZVIJČANE REDNE STEZALJKE



- 24A 450V~, termoplast PA, sive
- broj polova: 3÷5
- bezvijčani kontakti 1,5 ÷ 2,5 mm<sup>2</sup>, za tvrde žice
- sukladno normi EN 60998-1

## PLUG-IN WIRE CONNECTORS

- 24A 450V~, thermoplast PA, grey
- number of poles: 3÷5
- plug-in contacts 1.5÷2.5mm<sup>2</sup>, for rigide wires
- in accordance with EN 60998-1



UW45GY	PC253	2.5mm <sup>2</sup>	3P	3P	A	14	B	19	C
UW46GY	PC254	2.5mm <sup>2</sup>	4P	4P	17	19			9
UW47GY	PC255	2.5mm <sup>2</sup>	5P	5P	21	19			9

A	B	C
14	19	9
17	19	9
21	19	9


## BEZVIJČANE REDNE STEZALJKE



- 24A 450V~, termoplast PA, sive
- broj polova: 2 (tvrdi žica) + 1 (meki žica)
- bezvijčani kontakti 1,5 ÷ 2,5mm<sup>2</sup>
- sukladno normi EN 60998-1

## PLUG-IN WIRE CONNECTOR

- 24A 450V~, thermoplast PA, grey
- number of poles: 2 (rigide wire)+1 (soft wire)
- plug-in contacts 1.5÷2.5mm<sup>2</sup>
- in accordance with EN 60998-1



UW50WH	PC302	2.5mm <sup>2</sup>	2/1P
--------	-------	--------------------	------

**TEM**



KATALOG /  
CATALOGUE

# distribucija



KUĆIŠTA CUBO IP20 AC  
BOXES CUBO IP20 AC



162

KUĆIŠTA CUBO IP55 AQ  
BOXES CUBO IP55 AQ



163

PARAPETNI KANALI ALUMINIJ MA  
TRUNKING SYSTEM ALUMINIUM MA



165

PODNE KUTIJE MT  
FLOOR BOXES MT



171

RAZDJELNICI MO  
DISTRIBUTION BOARDS MO




173




tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
AC11	NADŽBUKNA KUTIJA SA STRAŽNJIM POKLOPCEM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	1M	<input type="checkbox"/> PW bijela sjajna polar white <input type="checkbox"/> ES srebrna mat elox silver
AC21	NADŽBUKNA KUTIJA SA STRAŽNJIM POKLOPCEM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	2M	<input type="checkbox"/> IW bež sjajna ivory white
AC41	NADŽBUKNA KUTIJA SA STRAŽNJIM POKLOPCEM SURFACE MOUNT BOX WITH BACK SIDE COVER	IP20	4M	


#### KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 1M

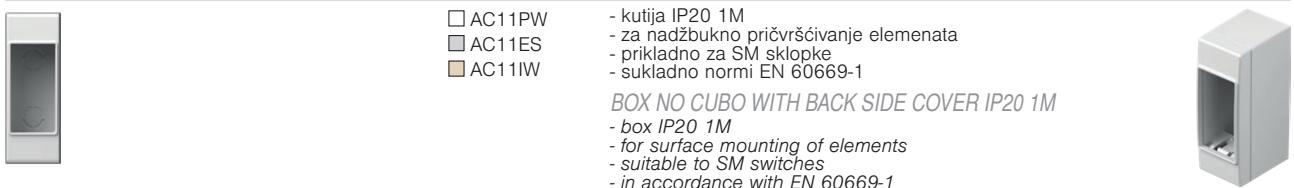


#### KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 2M

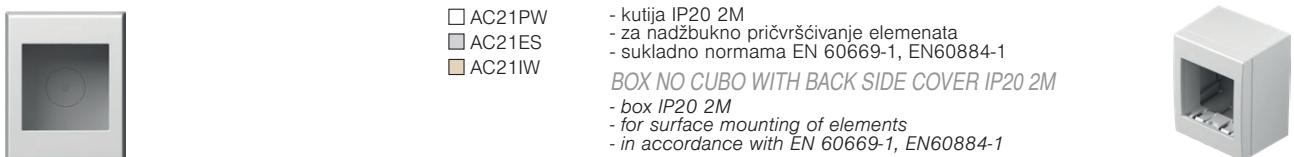

#### KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 4M

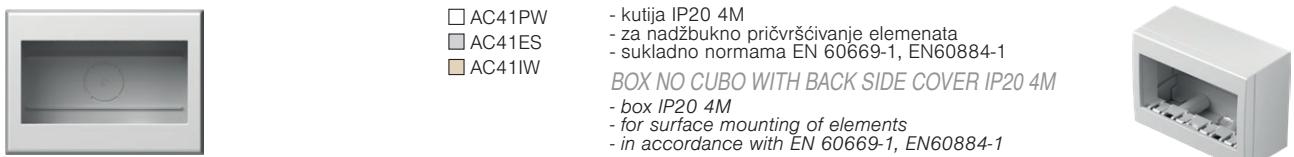

#### KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 6M

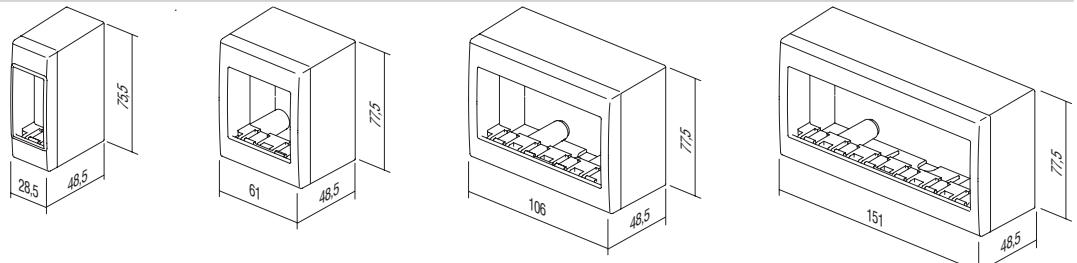

## BOXES CUBO IP55 AQ



tip type	naziv description	tehnički podaci technical data	veličina size	boja colour
AQ20	VANJSKA NADŽBUKNA KUTIJA OUTDOOR SURFACE MOUNT BOX	IP55	2M	<input type="checkbox"/> PW bijela sjajna polar white
AQ22	VANJSKA NADŽBUKNA KUTIJA OUTDOOR SURFACE MOUNT BOX	IP55	2x2M	<input checked="" type="checkbox"/> GY siva grey
AQ30	VANJSKA NADŽBUKNA KUTIJA OUTDOOR SURFACE MOUNT BOX	IP55	3M	
AQ31	VANJSKA NADŽBUKNA KUTIJA OUTDOOR SURFACE MOUNT BOX	IP55	3M	



AQ20PW  
 AQ20GY

## KUTIJA NO CUBO IP55 2M

- kutija IP55 2M  
- za nadžbukno pričvršćivanje  
- IP55 za ugradnju u vlažnom prostoru  
- sukladno normama CEI 23-48, EN 60670

## BOX NO CUBO IP55 2M

- box IP55 2M  
- for surface mounting  
- IP55 for usage in humid areas  
- in accordance with CEI 23-48, EN 60670



AQ22PW  
 AQ22GY

## KUTIJA NO CUBO IP55 2x2M

- kutija IP55 2x2M  
- za nadžbukno pričvršćivanje  
- IP55 za ugradnju u vlažnom prostoru  
- sukladno normama CEI 23-48, EN 60670

## BOX NO CUBO IP55 2x2M

- box IP55 2x2M  
- for surface mounting  
- IP55 for usage in humid areas  
- in accordance with CEI 23-48, EN 60670



AQ30PW  
 AQ30GY

## KUTIJA NO CUBO IP55 3M

- kutija IP55 3M  
- za nadžbukno pričvršćivanje  
- IP55 za ugradnju u vlažnom prostoru  
- sukladno normama CEI 23-48, EN 60670

## BOX NO CUBO IP55 3M

- box IP55 3M  
- for surface mounting  
- IP55 for usage in humid areas  
- in accordance with CEI 23-48, EN 60670



AQ31PW  
 AQ31GY

## KUTIJA PO CUBO IP55 3M

- kutija IP55 3M  
- za podžbukno pričvršćivanje  
- IP55 za ugradnju u vlažnom prostoru  
- sukladno normama CEI 23-48, EN 60670

## BOX PO CUBO IP55 3M

- box IP55 3M  
- for flush mounting  
- IP55 for usage in humid areas  
- in accordance with CEI 23-48, EN 60670










□ AQ21PW

**KUTIJA PO CUBO IP55 2M**


- kutija IP55 2M
- moguće kombinacije sa svim funkcijskim elementima Modul
- za podžbukno pričvršćivanje
- IP55 za ugradnju u vlažnom prostoru
- sukladno normama CEI 23-48, EN 60670

**BOX PO CUBO IP55 2M**

- box IP55 2M
- can be combined with all Modul functional elements
- for flush mounting
- IP55 for usage in humid areas
- in accordance with CEI 23-48, EN 60670



## TRUNKING SYSTEM ALUMINIUM

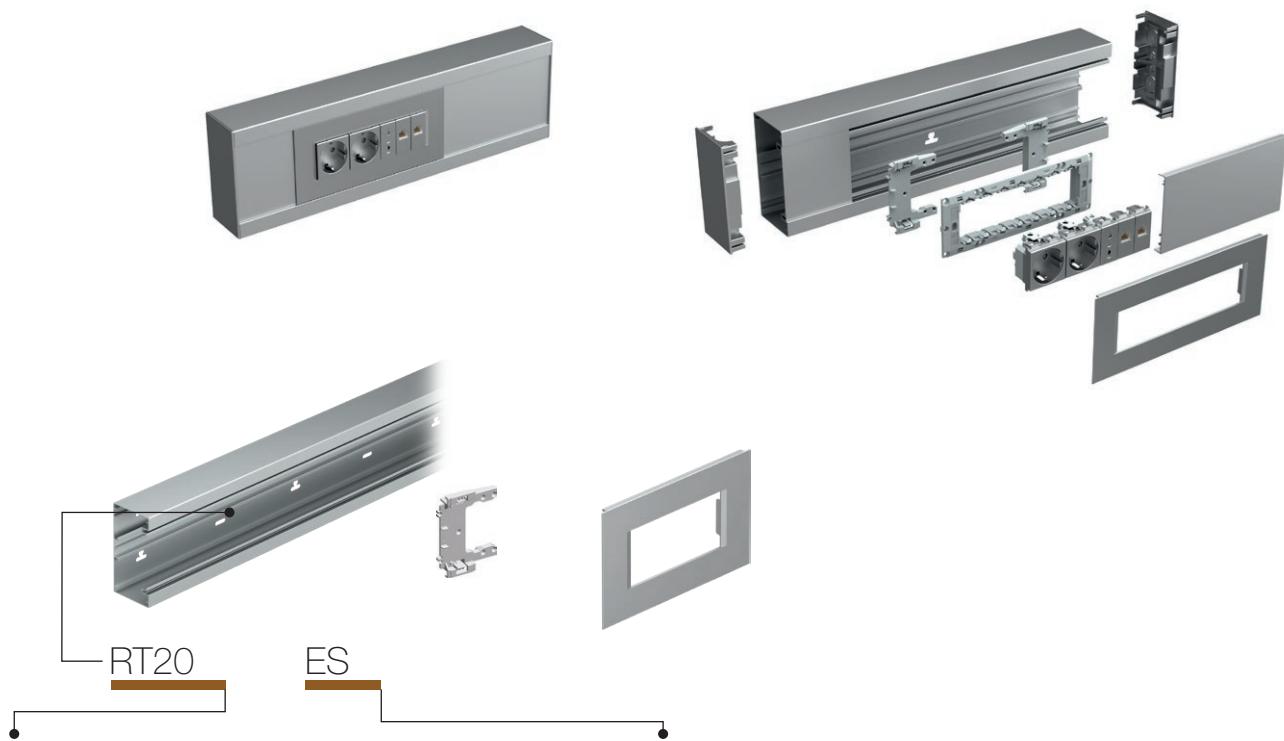

tip type	naziv description	veličina size	boja colour
RT10	ADAPTER MA 92 ADAPTER MA 92	/	<input checked="" type="checkbox"/> ES srebrna mat elox silver-mat
RT12	POKLOPAC MA 92 COVER PLATE MA 92	2/3M	<input type="checkbox"/> PW bijela mat (RAL 9016) white-mat
RT14	POKLOPAC MA 92 COVER PLATE MA 92	4M	
.	.	.	
.	.	.	

## ADAPTER MA 92



RT10

- adapter za pričvršćivanje nosača 2/3M, 4M ili 7M na kanal MA bez kutije
- za svaki su nosač potrebna dva adaptera
- sukladno normi EN 50085-1

## ADAPTER MA 92

- adapter for fixing mounting frames 2/3M, 4M or 7M on MA trunking without box
- each mounting frame needs two adapters
- in accordance with EN 50085-1




## POKLOPAC MA 92 2/3M



RT12ES  
 RT12PW

- dekorativni poklopac MA 2/3M
  - sukladno normi EN 50085-1
- COVER PLATE MA 92 2/3M*
- decorative cover plate MA 2/3M
  - in accordance with EN 50085-1




## POKLOPAC MA 92 4M



RT14ES  
 RT14PW

- dekorativni poklopac MA 4M
  - sukladno normi EN 50085-1
- COVER PLATE MA 92 4M*
- decorative cover plate MA 4M
  - in accordance with EN 50085-1




## POKLOPAC MA 92 7M



RT17ES  
 RT17PW

- dekorativni poklopac MA 7M
  - sukladno normi EN 50085-1
- COVER PLATE MA 92 7M*
- decorative cover plate MA 7M
  - in accordance with EN 50085-1






RT20ES  
 RT20PW

#### OSNOVA KANALA MA 130x65

- osnova kanala od ekstrudiranog aluminija
- visina 130 mm, duljina 2 m
- DIN tračnica 35 mm na dnu
- sukladno normi EN 50085-1

#### TRUNKING BASE MA 130x65

- trunking base from extruded aluminium
- height 130mm, lenght 2m
- DIN - rail 35mm shape on bottom
- in accordance with EN 50085-1




RT21ES  
 RT21PW

#### OSNOVA KANALA MA 165x65

- osnova kanala od ekstrudiranog aluminija
- visina 165mm, duljina 2 m
- DIN tračnica 35 mm na dnu
- sukladno normi EN 50085-1

#### TRUNKING BASE MA 165x65

- trunking base from extruded aluminium
- height 165mm, lenght 2m
- DIN - rail 35mm shape on bottom
- in accordance with EN 50085-1




RT25ES  
 RT25PW

#### POKLOPAC KANALA MA 92

- poklopac kanala od ekstrudiranog aluminija
- visina 92mm, duljina 2 m
- sukladno normi EN 50085-1

#### FRONT COVER MA 92

- front cover from extruded aluminium
- height 92mm, lenght 2m
- in accordance with EN 50085-1




RT30

#### PREGRADA MA 43

- pregrada od ekstrudiranog polimera
- dubina 43 mm, duljina 2 m
- sukladno normi EN 50085-1

#### CABLE SHELF MA 43

- cable shelf from extruded polymer
- depth 43mm, lenght 2m
- in accordance with EN 50085-1




RT31

#### PREGRADA MA 43 AL

- pregrada od ekstrudiranog aluminija
- dubina 43 mm, duljina 2 m
- sukladno normi EN 50085-1

#### CABLE SHELF MA 43 AL

- cable shelf from extruded aluminium
- depth 43mm, lenght 2m
- in accordance with EN 50085-1




RT32

#### PREGRADA MA 43 AL DVOSTRUKA

- dvostruka pregrada od ekstrudiranog aluminija
- dubina 43 mm, duljina 2 m
- sukladno normi EN 50085-1

#### CABLE SHELF MA 43 AL DOUBLE

- double cable shelf from extruded aluminium
- depth 43mm, lenght 2m
- in accordance with EN 50085-1



## TRUNKING SYSTEM ALUMINIUM




RT35ES  
 RT35PW

## ZAVRŠNI ELEMENT MA 130x65

- završni element od polimera  
- visina 130mm  
- sukladno normi EN 50085-1

## STOP END MA 130x65

- stop end element from polymer  
- height 130mm  
- in accordance with EN 50085-1



RT36ES  
 RT36PW

## ZAVRŠNI ELEMENT MA 165x65

- završni element od metala  
- visina 165mm  
- sukladno normi EN 50085-1

## STOP END MA 165x65

- stop end element from metal  
- height 165mm  
- in accordance with EN 50085-1




RT38

## SET SPOJNI ELEMENT MA 65

- spojni element od polimera  
- set sadrži 2 spojna elementa i vijke  
- sukladno normi EN 50085-1

## SET JOINING PIECE MA 65

- joining piece from polymer  
- set contains two pieces and screws  
- in accordance with EN 50085-1



RT40ES  
 RT40PW

## UNIVERZALNI KUT MA 130x65

- univerzalni kutni element  
- visina 130mm  
- sukladno normi EN 50085-1

## UNIVERSAL CORNER MA 130x65

- universal corner element  
- height 130mm  
- in accordance with EN 50085-1



RT41ES  
 RT41PW

## UNIVERZALNI KUT MA 165x65

- univerzalni kutni element  
- visina 165mm  
- sukladno normi EN 50085-1

## UNIVERSAL CORNER MA 165x65

- universal corner element  
- height 165mm  
- in accordance with EN 50085-1




RT42

## ELEMENT ZA UZEMLJENJE MA 2x A6.3

- element za uzemljenje osnove kanala i poklopca  
- sukladno normi EN 50085-1

## EARTHING PIECE MA 2x A6.3

- earthing piece for earthing of trunking base  
and front cover  
- in accordance with EN 50085-1






RT43ES  
 RT43PW

#### L-KOMAD ELEMENT MA 130x65

- univerzalni L-komad od aluminija
- visina 130 mm, duljina 400mm
- sukladno normi EN 50085-1

#### L-BEND MA 130x65

- universal L bend element from aluminium
- height 130mm, lenght 400mm
- in accordance with EN 50085-1




RT44ES  
 RT44PW

#### L-KOMAD ELEMENT MA 165x65

- univerzalni L-komad od aluminija
- visina 165mm, duljina 400mm
- za povezivanje na MA 130x65
- sukladno normi EN 50085-1

#### L-BEND MA 165x65

- universal L bend element from aluminium
- height 165mm, lenght 400mm
- connection on MA 130x65
- in accordance with EN 50085-1




RT45ES  
 RT45PW

#### T-KOMAD MA 130x65

- univerzalni T-komad od aluminija
- visina 130 mm, duljina 400mm
- sukladno normi EN 50085-1

#### T-BEND MA 130x65

- universal T bend element from aluminium
- height 130mm, lenght 400mm
- in accordance with EN 50085-1




RT46ES  
 RT46PW

#### T-KOMAD MA 165x65

- univerzalni T-komad od aluminija
- visina 165mm, duljina 400mm
- za povezivanje na MA 130x65
- sukladno normi EN 50085-1


#### T-BEND MA 165x65

- universal T bend element from aluminium
- height 165mm, lenght 400mm
- connection on MA 130x65
- in accordance with EN 50085-1



MA parapetni kanali temelje se na modularnom sustavu s kombinacijama elemenata veličine 2M, 4M ili 7M

MA trunking is based on modular system making 2M, 4M or 7M combinations of elements




Modul sadrži specijalne elemente pripremljene za brzu instalaciju

In Modul we provide special elements for quick installation



Adapter MA omogućuje točno postavljanje bez dodatnog napora

With Adapter MA exact positioning without extra effort is provided



Montaža bez kutije znači više prostora za kablove, DIN tračnica ima oblik sukladan normi EN 60715

Mounted without box means more space for cables, DIN-rail base shape EN-60715

## TRUNKING SYSTEM ALUMINIUM



## NOSAČ STUPIĆA MA JEDNOSTRUKI 130x65

- RT50ES  
 RT50PW

- nosač za pričvršćivanje kanala MA130 na podu i/ili na stropu  
- sukladno normi EN 50085-1



## FIXING PLATE MA SINGLE 130x65

- fixing plate for fixing trunking base MA130 on the floor  
and/or on the ceiling  
- in accordance with EN 50085-1



- RT51ES  
 RT51PW

## NOSAČ STUPIĆA MA DVOSTRUSKI 130x65

- nosač za pričvršćivanje dva kanala MA130 na podu  
i/ili na stropu  
- sukladno normi EN 50085-1

## FIXING PLATE MA DOUBLE 130x65

- fixing plate for fixing two trunking bases MA130 on the  
floor and/or on the ceiling  
- in accordance with EN 50085-1



## STUPIĆ MA 130x65x500

- RT52ES  
 RT52PW

- stupić MA  
- visina 500mm  
- nosač 7M ugrađen  
- sukladno normi EN 50085-1

## SERVICE POST MA 130x65x500

- service post MA  
- height 500mm  
- mounting frame 7M included  
- in accordance with EN 50085-1




## STUPIĆ MA DVOSTRUSKI 130x130x500

- RT53ES  
 RT53PW

- stupić MA dvostruki  
- visina 500mm  
- nosači 7M ugrađeni  
- sukladno normi EN 50085-1

## SERVICE POST MA DOUBLE 130x130x500

- service post MA double  
- height 500mm  
- mounting frames 7M included  
- in accordance with EN 50085-1



distribucija



Cable intersection mm <sup>2</sup>	Poprečni presjek vodiča / Cable cross-section (mm <sup>2</sup> )				
	1 vodič / 1 wire	2 vodiča / 2 wires	3 vodiča / 3 wires	4 vodiča / 4 wires	5 vodiča / 5 wires
1,5	44	111	121	144	169
2,5	49	133	157	169	211
4	58	169	183	211	256
6	68	196	225	256	307

Kapacitet parapetnog kanala / Trunk capacity				
Kanal / Trunk	MA 130x65 prazan / empty	MA 130x65 s Modul sklopkama i utičnicama / with Modul switches and sockets	MA 165x65 prazan / empty	MA 130x65 s Modul sklopkama i utičnicama / with Modul switches and sockets
kapaciteta capacity	7600 mm <sup>2</sup>	5500 mm <sup>2</sup>	9900 mm <sup>2</sup>	7800 mm <sup>2</sup>
max ø	54 mm	2x42 mm	54 mm	2x42 mm



tip type	naziv description	tehnički podaci technical data
RB30	PODNA KUTIJA <i>FLOOR BOX</i>	MT 7
RB31	SPOJNA PRIRUBNICA PODNE KUTIJE MT 7 <i>FLOOR BOX FLANGE</i>	
RB33	PODNA KUTIJA <i>FLOOR BOX</i>	MT 14
.	.	.
.	.	.
.	.	.

	RB30	RB33	RB36	RB40	RB43	RB46
a	170	260	350	170	260	350
b	260	260	260	260	260	260
X	140	230	320	140	230	320
Y	230	230	230	230	230	230

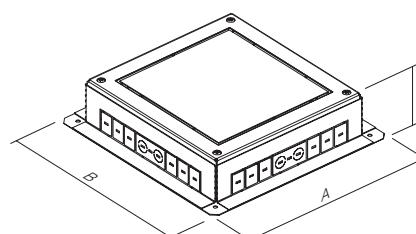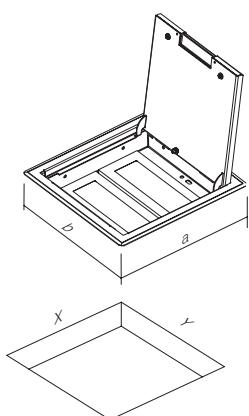

	RB31	RB34	RB37	RB41	RB44	RB47
A	250	340	430	250	340	430
B	340	340	340	340	340	340
C	95-125	95-125	95-125	125-150	125-150	125-150

## FLOOR BOXES M T

distribucija

## PODNA KUTIJA MT 7



RB30

- podna kutija MT 7
- metalna, srebrne boje RAL 9006
- nosač MODUL 7M ugrađen
- ugradne dimenzije 140x230 mm, dubina min. 95 mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX MT 7

- floor box MT 7
- metal, colour silver RAL 9006
- mounting frame MODUL 7M included
- mounting dimensions 140x230mm, depth min 95mm
- floor lining thickness up to 10mm
- in accordance with EN 50085-1 and EN 50085-2-2

## PODNA KUTIJA MT 7 H = 88mm



RB40

- podna kutija MT 7
- metalna, srebrne boje RAL 9006
- nosač MODUL 7M ugrađen
- ugradne dimenzije 140x230 mm, dubina min. 120mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX MT 7 H=88mm

- floor box MT 7
- metal, colour silver RAL 9006
- mounting frame MODUL 7M included
- mounting dimensions 140x230mm, depth min 120mm
- floor lining thickness up to 10mm
- in accordance with EN 50085-1 and EN 50085-2-2

## SPOJNA PRIRUBNICA PODNE KUTIJE MT 7



RB31

- spojna prirubnica podne kutije za poklopac MT 7
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 95-125 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX FLANGE MT 7

- floor box flange for box cover MT 7
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 95-125mm
- in accordance with EN 50085-1 and EN 50085-2-2

## SPOJNA PRIRUBNICA PODNE KUTIJE MT 7 H = 88mm



RB41

- spojna prirubnica podne kutije za poklopac MT 7 H = 88 mm
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 125-150mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX FLANGE MT 7 H=88mm

- floor box flange for box cover MT 7 H=88mm
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 125-150mm
- in accordance with EN 50085-1 and EN 50085-2-2

## PODNA KUTIJA MT 14



RB33

- podna kutija MT 14
- metalna, srebrne boje RAL 9006
- nosači MODUL 2x7M ugrađeni
- ugradne dimenzije 230x230 mm, dubina min. 95 mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX MT 14

- floor box MT 14
- metal, colour silver RAL 9006
- mounting frame MODUL 2x7M included
- mounting dimensions 230x230mm, depth min 95mm
- floor lining thickness up to 10mm
- in accordance with EN 50085-1 and EN 50085-2-2

## PODNA KUTIJA MT 14 H = 88mm



RB43

- podna kutija MT 14
- metalna, srebrne boje RAL 9006
- nosači MODUL 2x7M ugrađeni
- ugradne dimenzije 230x230 mm, dubina min. 120mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

## FLOOR BOX MT 14 H=88mm

- floor box MT 14
- metal, colour silver RAL 9006
- mounting frames MODUL 2x7M included
- mounting dimensions 230x230mm, depth min 120mm
- floor lining thickness up to 10mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB34

**SPOJNA PRIRUBNICA PODNE KUTIJE MT 14**

- spojna prirubnica podne kutije za poklopac MT 14
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 95-125 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX FLANGE MT 14**

- floor box flange for box cover MT 14
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 95-125mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB44

**SPOJNA PRIRUBNICA PODNE KUTIJE MT 14 H = 88mm**

- spojna prirubnica podne kutije za poklopac MT 14 H = 88 mm
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 125-150mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX FLANGE MT 14 H=88mm**

- floor box flange for box cover MT 14 H=88mm
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 125-150mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB36

**PODNA KUTIJA MT 21**

- podna kutija MT 21
- metalna, srebrne boje RAL 9006
- nosači MODUL 3x7M ugrađeni
- ugradne dimenzije 320x230 mm, dubina min. 95 mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX MT 21**

- floor box MT 21
- metal, colour silver RAL 9006
- mounting frames MODUL 3x7M included
- mounting dimensions 320x230mm, depth min 95mm
- floor lining thickness up to 10mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB46

**PODNA KUTIJA MT 21 H = 88mm**

- podna kutija MT 21
- metalna, srebrne boje RAL 9006
- nosači MODUL 3x7M ugrađeni
- ugradne dimenzije 320x230 mm, dubina min. 120mm
- debljina podne obloge poklopca do 10 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX MT 21 H=88mm**

- floor box MT 21
- metal, colour silver RAL 9006
- mounting frames MODUL 3x7M included
- mounting dimensions 320x230mm, depth min 120mm
- floor lining thickness up to 10mm
- in accordance with EN 50085-1 and EN 50085-2-2



RB37

**SPOJNA PRIRUBNICA PODNE KUTIJE MT 21**

- spojna prirubnica podne kutije za poklopac MT 21
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 95-125 mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX FLANGE MT 21**

- floor box flange for box cover MT 21
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 95-125mm
- in accordance with EN 50085-1 and EN 50085-2-2




RB47

**SPOJNA PRIRUBNICA PODNE KUTIJE MT 21 H = 88mm**

- spojna prirubnica podne kutije za poklopac MT 21 H = 88 mm
- metalna, galvanizirana
- za ugradnju u pod ili dvostruki pod
- prilagodljiva visina 125-150mm
- sukladno normama EN 50085-1 i EN 50085-2-2

**FLOOR BOX FLANGE MT 21 H=88mm**

- floor box flange for box cover MT 21 H=88mm
- metal, galvanized
- for installation in a floor or double floor
- adjustable height 125-150mm
- in accordance with EN 50085-1 and EN 50085-2-2

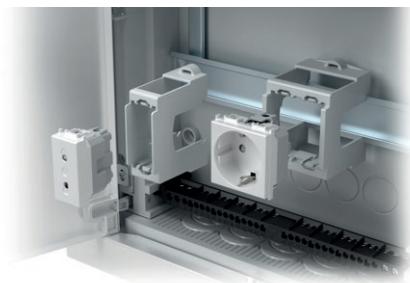

RB20


tip type	naziv description	tehnički podaci technical data
RB10	ADAPTER ZA DIN TRAČNICU <i>ADAPTER FOR DIN RAIL</i>	35mm 1M
RB11	ADAPTER ZA DIN TRAČNICU <i>ADAPTER FOR DIN RAIL</i>	35mm 2M
RB20	RAZDJELNI ORMARIĆ <i>DISTRIBUTION BOX</i>	MO 12+2



RB10

**ADAPTER ZA DIN TRAČNICU 35mm 1M**


- adapter MODUL 1M
  - za Din tračnicu 35 mm
  - sukladno normi EN 50022
- ADAPTER FOR DIN RAIL 35mm 1M*
- adapter MODUL 1M
  - for DIN rail 35mm
  - in accordance with EN 50022



RB11

**ADAPTER ZA DIN TRAČNICU 35mm 2M**

- adapter MODUL 2M
  - za Din tračnicu 35 mm
  - sukladno normi EN 50022
- ADAPTER FOR DIN RAIL 35mm 2M*
- adapter MODUL 2M
  - for DIN rail 35mm
  - in accordance with EN 50022



## RAZDJELNI ORMARIĆ MO 12 + 2

RB20




- razdjelni ormarić MO jedan red 12+2MU
- 400V~, razred II, IP40
- metalna vratašca i okvir, bijele boje RAL 9016
- priloženi konektori za vod za uzemljenje i neutralni vod
- ugradnja u zid od opeke
- sukladno normama EN 60670-1 i IEC 60670-24

**DISTRIBUTION BOX MO 12+2**

- distribution box MO single row 12+2MU
- 400V~, Class II, IP40
- metal leveling frame and door, colour white RAL 9016
- neutral and earth conductor terminals enclosed
- for brick wall mounting
- in accordance with EN 60670-1 and IEC 60670-24

RB20VO

- ugradnja u šuplje zidove
- for hollow wall mounting



## RAZDJELNI ORMARIĆ MO 24 + 4

RB21




- razdjelni ormarić MO dva reda 24+4MU
- 400V~, razred II, IP40
- metalna vratašca i okvir, bijele boje RAL 9016
- priloženi konektori za vod za uzemljenje i neutralni vod
- ugradnja u zid od opeke
- sukladno normama EN 60670-1 i IEC 60670-24

**DISTRIBUTION BOX MO 24+4**

- distribution box MO double row 24+4MU
- 400V~, Class II, IP40
- metal leveling frame and door, colour white RAL 9016
- neutral and earth conductor terminals enclosed
- for brick wall mounting
- in accordance with EN 60670-1 and IEC 60670-24

RB21VO

- ugradnja u šuplje zidove
- for hollow wall mounting



## RAZDJELNI ORMARIĆ MO 36 + 6

RB22




- razdjelni ormarić MO tri reda 36+6MU
- 400V~, razred II, IP40
- metalna vratašca i okvir, bijele boje RAL 9016
- priloženi konektori za vod za uzemljenje i neutralni vod
- ugradnja u zid od opeke
- sukladno normama EN 60670-1 i IEC 60670-24

**DISTRIBUTION BOX MO 36+6**

- distribution box MO triple row 36+6 MU
- 400V~, Class II, IP40
- metal leveling frame and door, colour white RAL 9016
- neutral and earth conductor terminals enclosed
- for brick wall mounting
- in accordance with EN 60670-1 and IEC 60670-24

RB22VO

- ugradnja u šuplje zidove
- for hollow wall mounting

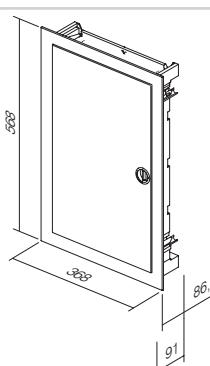

## RAZDJELNI ORMARIĆ MO 48 + 8

RB23





- razdjelni ormarić MO četiri reda 48+8MU
- 400V~, razred II, IP40
- metalna vratašca i okvir, bijele boje RAL 9016
- priloženi konektori za vod za uzemljenje i neutralni vod
- ugradnja u zid od opeke
- sukladno normama EN 60670-1 i IEC 60670-24

**DISTRIBUTION BOX MO 48+8**

- distribution box MO quad row 48+8 MU
- 400V~, Class II, IP40
- metal leveling frame and door, colour white RAL 9016
- neutral and earth conductor terminals enclosed
- for brick wall mounting
- in accordance with EN 60670-1 and IEC 60670-24

RB23VO

- ugradnja u šuplje zidove
- for hollow wall mounting

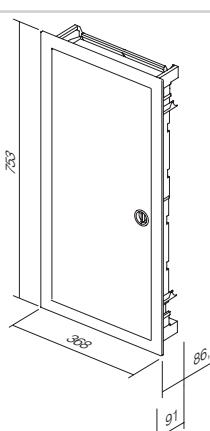

	RB20 RB20VO	RB21 RB21VO	RB22 RB22VO	RB23 RB23VO
x	314	314	314	314
y	314	414	539	724

distribucija



ekonomik®



Planned for excellence  
Style is essential



ERGO

METAL

SOFT

Neutralan, kompaktan, elegantan dizajn može se prilagoditi svakom okruženju u kojem boravite ili radite. Ne odstupa od interijera, nego se u njega harmonično uklapa.

A neutral, compact, elegant design is adjustable to every working or living area. It does not stick out from the interior, but rather harmonically fits into it.





## Planirano za savršenstvo Stil je bitan



Čista linija nježno je zaobljena – dobro osmišljena ergonomija posebno za vas.

A pure line is slightly curved - well considered ergonomics especially for you.



Možete birati između sjajnih reflektirajućih površina i suvremenoga metalnog izgleda.

You can choose between shiny reflective surfaces and modern metallic look.



Mekoća oblika pronaći će svoje mjesto, kako u modernim interijerima tako i u onim klasičnim.

The softness of the form will find its place in modern as well as in classic interiors.

HARMONY

REFLEX

UV PROTECT

Želje mogu biti vrlo različite. Stoga smo za vas pomno odabrali mogućnosti koje vam pružaju pravi odgovor. Neutralna paleta boja dodatno će ispuniti vaš ambijent – neće vas ograničavati.

Desires can be very different. Therefore we have carefully selected possibilities for you, which can offer you the right answer. A neutral palette of colours will only complement your ambient - it will not restrict it.

Press and the world will spring to life  
Colourful landscape between walls



Doživljaj refleksije pružit će vam sjajni metali od polimera u bijeloj i bež boji.

Shiny polymer materials in white and beige colours enable reflective mood.



Odabrani dekorativni metalni sloj istovremeno je i moderan i neutralan.

Selected decorative metallic coat is at the same time modern and neutral.

# Pritisnite i svijet će oživjeti Šareni krajolik između zidova



Za sve vas, koji se želite igrati pastelnim bojama, Ekonomik Colour idealno je rješenje.

For those who want to play with pastel colours Ekonomik Color represents a perfect solution.



Robusnost i velika otpornost na vanjske utjecaje (UV) osigurane su duroplastičnim materijalom (linija Colour).

Robustness and high resistance to external effects (UV) are secured by duroplastic materials (Color line).



VERTICAL

HORIZONTAL

SAVE SPACE



Pri sastavljanju sačuvajte prostor na zidu. Ako raspolazežete s malo prostora, prava je odluka „okomito“. With combining you save space on the wall. When faced with a limited space, »vertically« is the right decision.




Kombinirajte prema vlastitoj želji. Combine as you please.



Vidljivi elementi mogu se jednostavno demontirati. Bit će vam zahvalni i majstori.

Visible elements can be easily taken apart. Painters will be grateful to you.

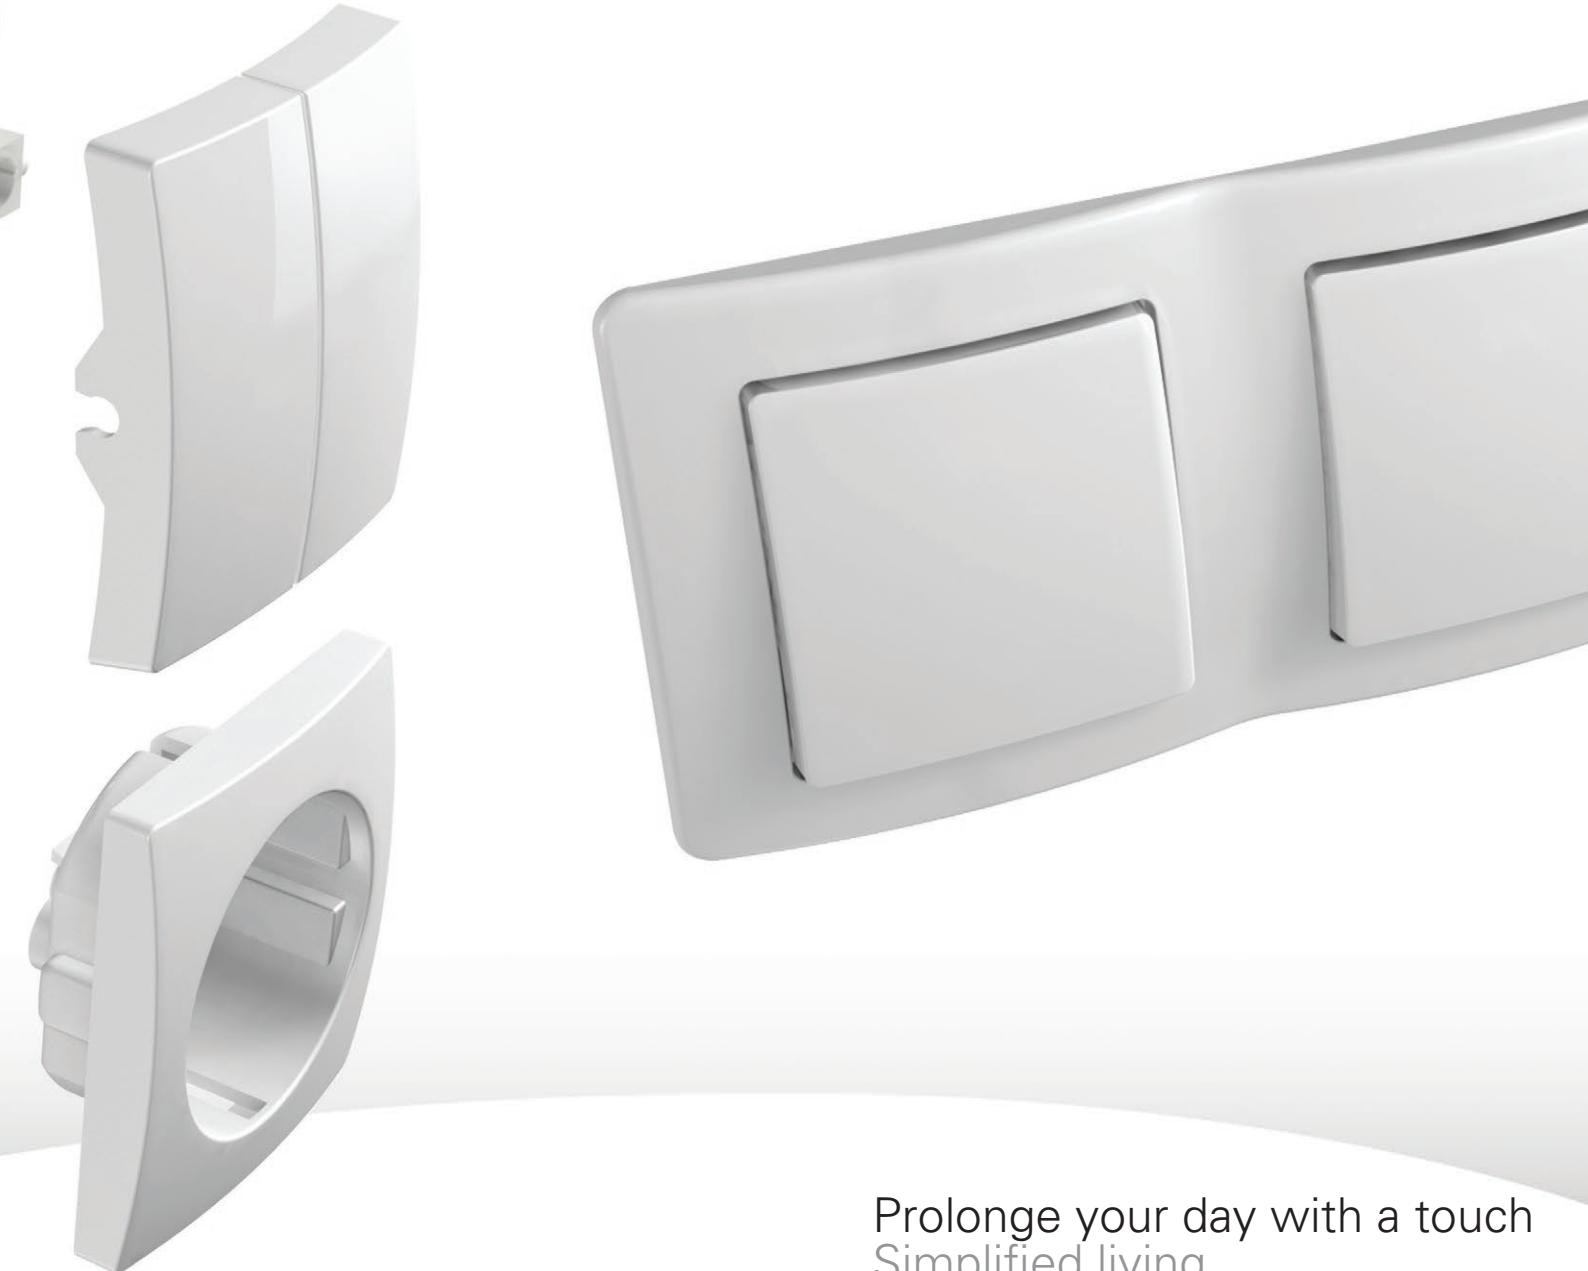


Prolonge your day with a touch  
Simplified living

## Produžite svoj dan dodirom Za jednostavniji život

Ekonomik je rješenje za sustav standardnih okruglih kutija. Pomoću njega možemo planirati kako jednostavne instalacije, novogradnje i adaptacije tako i one zahtjevnije. Sustav karakterizira spajanje bez upotrebe vijaka što će vam uštedjeti vrijeme pri ugradnji elemenata.

Ekonomik is a solution for the system of standardized round installations boxes. It can be used for simple as well as more demanding installations, new buildings and adaptations. The system is characterised by plug-in contacts which save time during installation of elements.

# Osjećajte se ugodno u sigurnom skloništu Potpuno povjerenje u dobru izgradnju

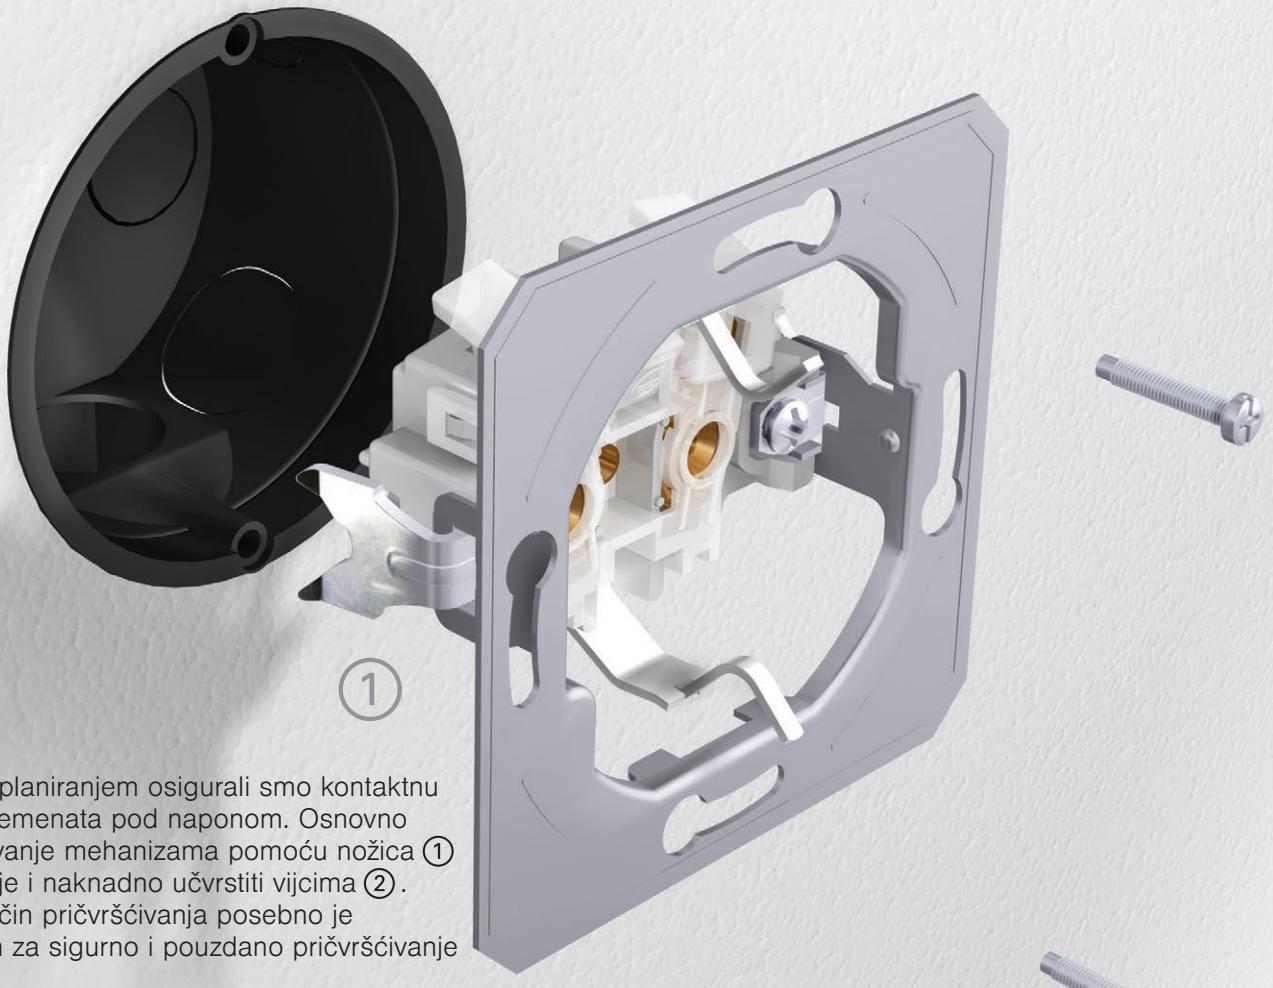

Pomnim planiranjem osigurali smo kontaktnu zaštitu elemenata pod naponom. Osnovno pričvršćivanje mehanizma pomoću nožica ① moguće je i naknadno učvrstiti vijcima ②. Takav način pričvršćivanja posebno je primjereno za sigurno i pouzdano pričvršćivanje utičnica.

By careful planning elements under voltage have been protected against touching. Basic fixing of mechanisms with fixing claws ① allows additional strengthening with screws ②. This manner is especially appropriate for safe and reliable fixing of sockets.

SIMPLE


FAST

FLEX



Dobro osmišljena konstrukcija sklopki omogućava također i jednostavno dodatno osvjetljenje.

A well-planned switch construction makes easy illumination possible also subsequently.



Spajanje bez vijaka omogućava brzo i pouzdano priključenje vodiča. Na isti se kontakt mogu pričvrstiti dva vodiča različitih presjeka.

Plug-in contacts enable quick and reliable attachment of wires. Two wires of different diameters can be attached to the same contact.

Montažne kutije olakšat će vam posao ugradnje.  
Zajamčene su odgovarajuće duljine.  
Easy-fitting installation boxes will make your work easier.  
Proper lengths are guaranteed.



Sklopke su testirane prema međunarodnim standardima koji jamče sigurnost i dug vijek trajanja.

Switches were tested according to international standards which guarantee safety and long life span.



Pouzdanost preklopa osiguravaju kontakti izrađeni od srebrne legure (AgNi).


Contacts made of silver alloy (Ag-Ni) guarantee safe switching.

## Feeling well in a safe shelter Total confidence in a good construction

SAFE

THRUST

CERTIFIED



Nožice omogućavaju dublje pričvršćivanje (i preko keramickih pločica i sl.)

Fixing claws enable deeper fixing (also through ceramic tiles, etc.)



Sve sklopke na prednjoj strani nose vidljivu oznaku.

All switches have a clear identification in the back.

**TEM**



KATALOG /  
CATALOGUE

# ekonomik



SKLOPKE SE  
SWITCHES SE



188

TIPKE TE  
BUTTONS TE



192

OSVJETLJENJE IA  
ILLUMINATION IA



193

UTIČNICE VE  
SOCKETS VE



196

KOMUNIKACIJE KE  
COMMUNICATIONS KE



199

POKLOPCI PE  
COVERS PE



204

ELEKTRONIKA EE  
ELECTRONICS EE



205

PRIBOR AE  
ACCESSORIES AE



210

OKVIRI OE  
SURROUNDS OE



212

tip type	naziv description	tehnički podaci technical data	boja colour	opcijski podaci 1 optional data 1	opcijski podaci 2 optional data 2
SE10	SKLOPKA JEDNOPOLNA SWITCH 1WAY	10AX 250V~	<input type="checkbox"/> PW bijela sjajna polar white	NT neutralna neutral	50
SE11	TIPKALO JEDNOPOLNO PUSH BUTTON 1WAY	10A 250V~	<input checked="" type="checkbox"/> IW bež sjajna ivory white		51
SE22	SKLOPKA DVOPOLNA SWITCH 2POLE	16AX 250V~	<input type="checkbox"/> ES srebrna mat elox silver	IN indikator indicator	0
.	.	.	<input type="checkbox"/> CO bijeli duroplast white thermoset		I 03
.	.	.	<input type="checkbox"/> NB crna sjajna night black		04

## SKLOPKA JEDNOPOLNA 10AX 250V ~



SE10

- 10AX 250V~, tip SE10
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>


L

o

1

## SWITCH 1WAY 10AX 250V~

- 10AX 250V~, type SE10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



## TIPKALO JEDNOPOLNO 10A 250V ~



SE11

- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>


L

o

1

## PUSH BUTTON 1WAY 10A 250V~

- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



## SKLOPKA DVOPOLNA 16AX 250V ~



SE22

- 16AX 250V~, tip SE22
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2 5mm<sup>2</sup>
- samo u kombinaciji s tipkom TE10\_NT03


L

o

1

## SWITCH 2POLE 16AX 250V~

- 16AX 250V~, type SE22
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>
- only in combination with button TE10\_NT03



## SKLOPKA SERIJSKA JEDNOPOLNA 10AX 250V ~



SE50

- 10AX 250V~, tip SE50
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>


L

o

1

## SWITCH 2GANG-1WAY 10AX 250V~

- 10AX 250V~, type SE50
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



## S W I T C H E S      S E

## TIPKALO SERIJSKO-JEDNOPOLNO 10A 250V ~





SE51

- 10A 250V~, tip SE51
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## PUSH BUTTON 2GANG-1WAY 10A 250V~

- 10A 250V~, type SE51
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



## SKLOPKA ŽALUZIJSKA 10AX 250V ~




SE52

- 10AX 250V~, tip SE52
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- s mehaničkom blokadom

## SWITCH SHUTTERS 10AX 250V~

- 10AX 250V~, type SE52
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>
- with mechanical interlock



## TIPKALO ŽALUZIJSKO 10A 250V ~





SE53

- 10A 250V~, tip SE53
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- s mehaničkom blokadom

## PUSH BUTTON SHUTTERS 10A 250V~

- 10A 250V~, type SE53
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>
- with mechanical interlock



## SKLOPKA IZMJENIČNA 10AX 250V ~





SE60

- 10AX 250V~, tip SE60
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## SWITCH 2WAY 10AX 250V~

- 10AX 250V~, type SE60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



## SKLOPKA IZMJENIČNA DVOSTRUKA 10AX 250V ~




SE63

- 10AX 250V~, tip SE63
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## SWITCH DOUBLE 2WAY 10AX 250V~

- 10AX 250V~, type SE63
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



## SKLOPKA KRIŽNA 10AX 250V ~





SE70

- 10AX 250V~, tip SE70
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## SWITCH INTERMEDIATE 10AX 250V~

- 10AX 250V~, type SE70
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>





- SE10PW  
 SE10IW  
 SE10ES  
 SE10CO  
 SE10NB

## SKLOPKA JEDNOPOLNA 10AX 250V ~

- 10AX 250V~, tip SE10
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## SWITCH 1WAY 10AX 250V~

- 10AX 250V~, type SE10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE10PWIN  
 SE10WIN  
 SE10ESIN  
 SE10COIN  
 SE10NBIN

## SKLOPKA JEDNOPOLNA 10AX 250V~ \_\_ IN

- IN indikator
- 10AX 250V~, tip SE10
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## SWITCH 1WAY 10AX 250V~ \_\_ IN

- IN indicator
- 10AX 250V~, type SE10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE11PW  
 SE11IW  
 SE11ES  
 SE11CO  
 SE11NB

## TIPKALO JEDNOPOLNO 10A 250V ~

- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## PUSH BUTTON 1WAY 10A 250V~

- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE11PWTI50  
 SE11WVTI50  
 SE11ESTI50  
 SE11COTI50  
 SE11NBTI50

## TIPKALO JEDNOPOLNO 10A 250V ~ \_\_ TI 50

- TI 50 indikator zvono + neonska tinjalica
- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## PUSH BUTTON 1WAY 10A 250V~ \_\_ TI 50

- TI 50 indicator bell+neon lamp
- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>




- SE11PWTI51  
 SE11WVTI51  
 SE11ESTI51  
 SE11COTI51  
 SE11NBTI51

## TIPKALO JEDNOPOLNO 10A 250V ~ \_\_ TI 51

- TI 51 indikator svjetlo + neonska tinjalica
- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## PUSH BUTTON 1WAY 10A 250V~ \_\_ TI 51

- TI 51 indicator light+neon lamp
- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>

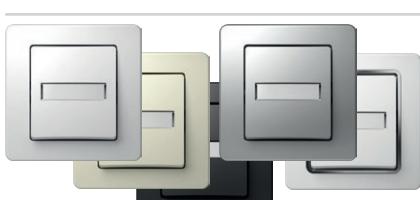

- SE11PWIL  
 SE11WIL  
 SE11ESIL  
 SE11COIL  
 SE11NBIL

## TIPKALO JEDNOPOLNO 10A 250V ~ \_\_ IL

- IL natpisna pločica
- 10A 250V~, tip SE11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>

## PUSH BUTTON 1WAY 10A 250V~ \_\_ IL

- IL inscription plate
- 10A 250V~, type SE11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE22PWIN03  
 SE22WIN03  
 SE22ESIN03  
 SE22NBIN03

## SKLOPKA DVOPOLNA 16AX 250V~ \_\_ IN 03

- IN 03 neutralna 0-1
- 16AX 250V~, tip SE22
- sukladno normi EN 60669-1
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>

## SWITCH 2POLE 16AX 250V~ \_\_ IN 03

- IN 03 neutral 0-1
- 16AX 250V~, type SE22
- in accordance with EN 60669-1
- screw contacts 1.5-2.5mm<sup>2</sup>



## S W I T C H E S   S E



- SE50PW  
 SE50IW  
 SE50ES  
 SE50CO  
 SE50NB

## SKLOPKA SERIJSKA-JEDNOPOLNA 10AX 250V ~

- 10AX 250V~, tip SE50
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2GANG-1WAY 10AX 250V~**
- 10AX 250V~, type SE50
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE51PW  
 SE51IW  
 SE51ES  
 SE51CO  
 SE51NB

## TIPKALO SERIJSKO-JEDNOPOLNO 10A 250V ~

- 10A 250V~, tip SE51
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 2GANG-1WAY 10A 250V~**
- 10A 250V~, type SE51
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE52PWNT09  
 SE52IWNT09  
 SE52ESNT09  
 SE52CONT09  
 SE52NBNT09

## SKLOPKA ŽALUZIJSKA 10AX 250V ~ \_ NT 09

- NT 09 neutralno gore-dolje
- 10AX 250V~, tip SE52
- sukladno normi EN 60669-1
- bezvijčano priručišćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- s mehaničkom blokadom



## SWITCH SHUTTERS 10AX 250V~ \_ NT 09

- NT 09 neutral up-down
- 10AX 250V~, type SE52
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>
- with mechanical interlock

## TIPKALO ŽALUZJSKO 10A 250V~ \_ NT 09



- SE53PWNT09  
 SE53IWNT09  
 SE53ESNT09  
 SE53CONT09  
 SE53NBNT09

## PUSH BUTTON SHUTTERS 10A 250V~ \_ NT 09

- NT 09 neutral up-down
- 10A 250V~, type SE53
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>
- with mechanical interlock



## SKLOPKA IZMJENIČNA 10AX 250V ~

- 10AX 250V~, tip SE60
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2WAY 10AX 250V~**
- 10AX 250V~, type SE60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE60PW  
 SE60IW  
 SE60ES  
 SE60CO  
 SE60NB

## SKLOPKA IZMJENIČNA DVOSTRUKA 10AX 250V ~

- 10AX 250V~, tip SE63
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH DOUBLE 2WAY 10AX 250V~**
- 10AX 250V~, type SE63
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>





- SE63PW  
 SE63IW  
 SE63ES  
 SE63CO  
 SE63NB

## SKLOPKA KRIŽNA 10AX 250V ~



- 10AX 250V~, tip SE70
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH INTERMEDIATE 10AX 250V~**
- 10AX 250V~, type SE70
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



- SE70PW  
 SE70IW  
 SE70ES  
 SE70CO  
 SE70NB




ekonomik

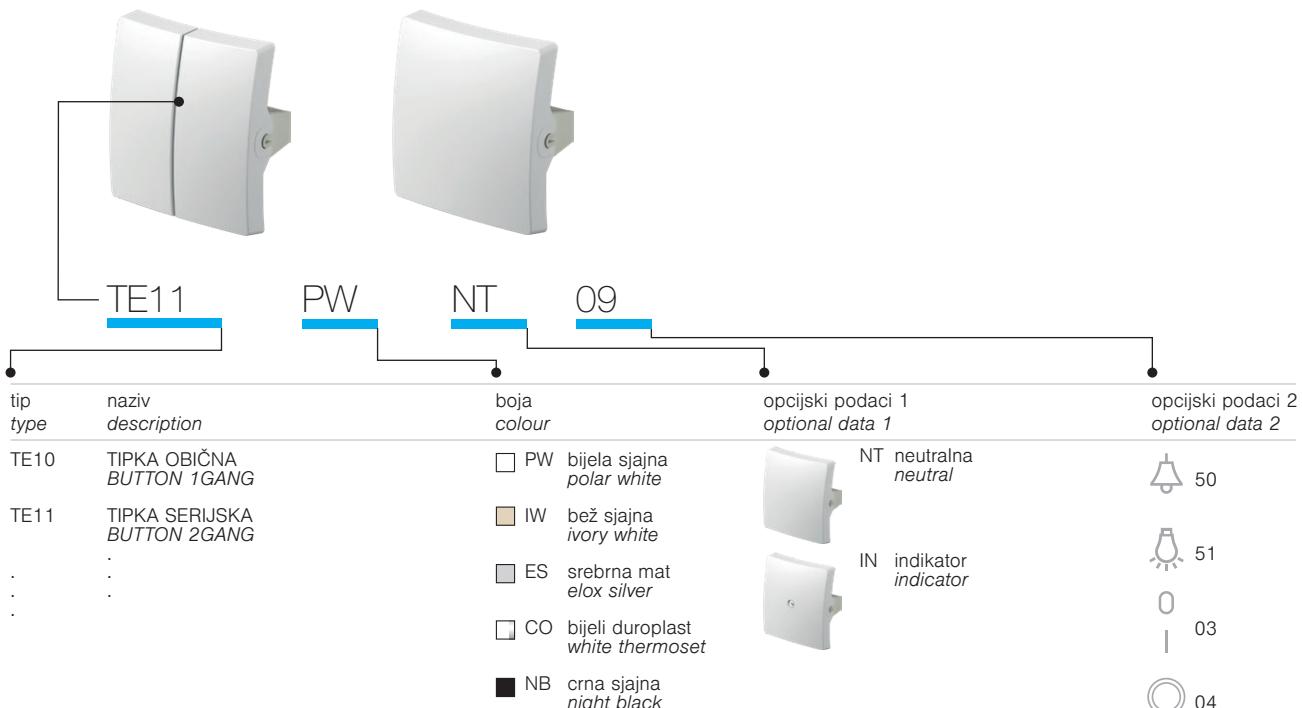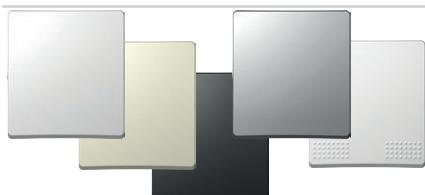**TIPKA OBIČNA**


- TE10PW
- TE10IW
- TE10ES
- TE10CO
- TE10NB

- tipka zajedno s nosačem  
**BUTTON 1GANG**  
- button together with carrier

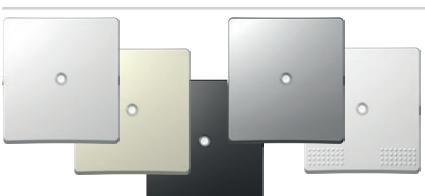**TIPKA INDIKATOR**

- TE10PWIN
- TE10WIN
- TE10ESIN
- TE10COIN
- TE10NBIN

- tipka zajedno s nosačem  
**BUTTON INDICATOR**  
- button together with carrier

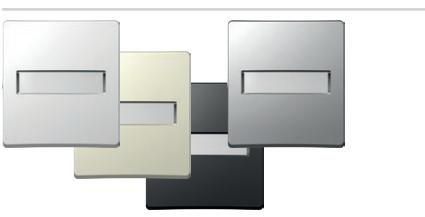**TIPKA S NATPISNOM PLOČICOM**



- TE13PWIL
- TE13IWIL
- TE13ESIL
- TE13NBIL


- tipka zajedno s nosačem, s natpisnom pločicom  
**BUTTON WITH INSCRIPTION PLATE**  
- button together with carrier, with inscription plate

**TIPKA SERIJSKA**

- TE11PW
- TE11IW
- TE11ES
- TE11CO
- TE11NB

- tipka serijska zajedno s nosačem  
**BUTTON 2GANG**  
- button 2gang together with carrier














			
IA20	WH		
tip type	naziv description	tehnički podaci technical data	boja colour
IA10	NEONSKA TINJALICA NEON LAMP	230V~ 0,34W	<input type="checkbox"/> WH bijela white
IA20	LED TINJALICA LED LAMP	230V~ 0,40W	<input checked="" type="checkbox"/> BL plava blue
IA21	LED TINJALICA LED LAMP	24V AC/DC 0,20W	<input checked="" type="checkbox"/> RD crvena red
.	.	.	<input checked="" type="checkbox"/> GR zelena green
.	.	.	<input checked="" type="checkbox"/> OR narančasta orange
<hr/>			
<b>NEONSKA TINJALICA 230V~ 0,34W</b>			
	<b>IA10OR</b> <ul style="list-style-type: none"> <li>- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke</li> <li>- u kombinaciji s tipkom s indikatorom</li> </ul> <p><b>NEON LAMP 230V~ 0,34W</b></p> <ul style="list-style-type: none"> <li>- for indication, illumination or constant illumination of switch</li> <li>- in combination with button with indicator</li> </ul>		
<hr/>			
<b>LED TINJALICA 230V AC/DC 0,40W</b>			
	<input type="checkbox"/> IA20WH <input checked="" type="checkbox"/> IA20GR <input checked="" type="checkbox"/> IA20RD <input checked="" type="checkbox"/> IA20BL <ul style="list-style-type: none"> <li>- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke</li> <li>- u kombinaciji s tipkom s indikatorom</li> </ul> <p><b>LED LAMP 230V AC/DC 0,40W</b></p> <ul style="list-style-type: none"> <li>- for indication, illumination or constant illumination of switch</li> <li>- in combination with button with indicator</li> </ul>		
<hr/>			
<b>LED TINJALICA 24V AC/DC 0,20W</b>			
	<input type="checkbox"/> IA21WH <input checked="" type="checkbox"/> IA21RD <ul style="list-style-type: none"> <li>- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke</li> <li>- u kombinaciji s tipkom s indikatorom</li> </ul> <p><b>LED LAMP 24V AC/DC 0,20W</b></p> <ul style="list-style-type: none"> <li>- for indication, illumination or constant illumination of switch</li> <li>- in combination with button with indicator</li> </ul>		
<hr/>			
<b>LED TINJALICA 12V AC/DC 0,10W</b>			
	<input type="checkbox"/> IA22WH <input checked="" type="checkbox"/> IA22RD <ul style="list-style-type: none"> <li>- za indikaciju, osvjetljenje ili stalno osvjetljenje sklopke</li> <li>- u kombinaciji s tipkom s indikatorom</li> </ul> <p><b>LED LAMP 12V AC/DC 0,10W</b></p> <ul style="list-style-type: none"> <li>- for indication, illumination or constant illumination of switch</li> <li>- in combination with button with indicator</li> </ul>		


\* Indikacija /  
Indication

Rasvjetna tijela /  
Illumination

\* Osvjetljenje stalno uključeno /  
Illumination always on

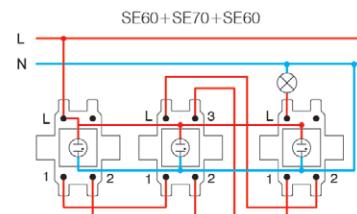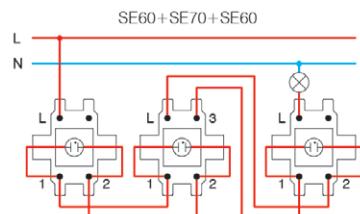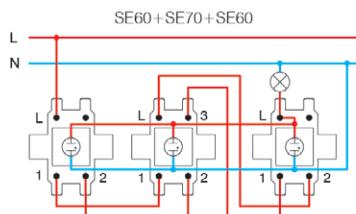

\* spojne shema kompaktne fluorescentne tinjalice (CFL, LED) /  
wiring scheme for energy saving lamps (CFL, LED)



## S O C K E T S V E


VE11	PT	XO	KS
tip type	naziv description	tehnički podaci technical data	opcijski podaci 1 optional data 1
VE10	ŠUKO UTIČNICA SOCKET SCHUKO	2P+E 16A 250V~	XO bez okvira without cover plate
VE11	ŠUKO UTIČNICA+POKLJUPAC SOCKET SCHUKO+COVER	2P+E 16A 250V~	KS utičnica s integriranim zaštitom shuttered live contacts
VE12	ŠUKO UTIČNICA SOCKET SCHUKO	2P+E 16A 250V~ BV	
.	.	.	
boja colour			
<input type="checkbox"/> PW bijela sjajna polar white	<input checked="" type="checkbox"/> PT bijela+prozirna white+transparent	<input type="checkbox"/> PP bijela+bijela white+white	
<input type="checkbox"/> IW bež sjajna ivory white	<input type="checkbox"/> IT bež+prozirna ivory+transparent	<input type="checkbox"/> II bež+bež ivory+ivory	
<input type="checkbox"/> ES srebrna mat elox silver	<input type="checkbox"/> ST srebrna+prozirna silver+transparent	<input type="checkbox"/> SS srebrna+srebrna silver+silver	
<input type="checkbox"/> CO bijeli duroplast white thermoset	<input type="checkbox"/> CT bijela+prozirna white+transparent	<input type="checkbox"/> BB crna+crna black+black	
<input type="checkbox"/> NB crna sjajna night black	<input type="checkbox"/> BT crna+prozirna black+transparent	<input type="checkbox"/> RR crvena+crvena red+red	
<input type="checkbox"/> RD crvena red	<input type="checkbox"/> RT crvena+prozirna red+transparent	<input type="checkbox"/> GG zelena+zelena green+green	
<input type="checkbox"/> GR zelena green	<input type="checkbox"/> GT zelena+prozirna green+transparent	<input type="checkbox"/> OO narančasta+narančasta orange+orange	
<input type="checkbox"/> OR narančasta orange	<input type="checkbox"/> OT narančasta+prozirna orange+transparent		



ekonomik

šuko – sukladno normi EN 60884-1, CEE7 (lista standarda III)

schuko - in accordance with EN 60884-1, CEE7 (standard sheet III)

• vijčano pričvršćivanje vodiča  
screw contacts• BV bezvijčano pričvršćivanje  
BV plug-in contacts

francuska – sukladno normi NF C 61-314 (lista standarda V)

French - in accordance with NF C 61-314 (standard sheet V)

• vijčano pričvršćivanje vodiča  
screw contacts• BV bezvijčano pričvršćivanje  
BV plug-in contacts

## UTIČNICA ŠUKO 2P + E 16A 250V ~ XO



- VE10PWXO
- VE10IWXO
- VE10ESXO
- VE10COXO
- VE10NBXO
- VE10RDXO
- VE10GRXO
- VE10ORXO

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E šuko  
 - 16A 250V~, tip VE10



## SOCKET SCHUKO 2P+E 16A 250V~ XO

- screw contacts 1.5-2.5mm<sup>2</sup>  
 - XO without surround  
 - 2P+E schuko  
 - 16A 250V~, type VE10



- VE11PTXO
- VE11ITXO
- VE11STXO
- VE11BTXO

## UTIČNICA ŠUKO + POKLOPAC 2P + E 16A 250V ~ XO

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E šuko+poklopac  
 - 16A 250V~, tip VE11



## SOCKET SCHUKO+COVER 2P+E 16A 250V~ XO

- screw contacts 1.5-2.5mm<sup>2</sup>  
 - XO without surround  
 - 2P+E schuko+cover  
 - 16A 250V~, type VE11



- VE12PWXO
- VE12IWXO
- VE12ESXO
- VE12COXO
- VE12NBXO
- VE12RDXO
- VE12GRXO
- VE12ORXO

## UTIČNICA ŠUKO 2P + E 16A 250V ~ BV XO

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E šuko  
 - 16A 250V~, tip VE12



## SOCKET SCHUKO 2P+E 16A 250V~ BV XO

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>  
 - XO without surround  
 - 2P+E schuko  
 - 16A 250V~, type VE12



- VE13PTXO
- VE13ITXO
- VE13STXO
- VE13BTXO

- VE13PPXO

## UTIČNICA ŠUKO + POKLOPAC 2P + E 16A 250V~ BV XO

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - XO bez okvira  
 - 2P+E šuko+poklopac  
 - 16A 250V~, tip VE13



## SOCKET SCHUKO+COVER 2P+E 16A 250V~ BV XO

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>  
 - XO without surround  
 - 2P+E schuko+cover  
 - 16A 250V~, type VE13



- VE10PW
- VE10IW
- VE10ES
- VE10CO
- VE10NB

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - 2P+E šuko  
 - 16A 250V~, tip VE10



## SOCKET SCHUKO 2P+E 16A 250V~

- screw contacts 1.5-2.5mm<sup>2</sup>  
 - 2P+E schuko  
 - 16A 250V~, type VE10



- VE11PT
- VE11IT
- VE11ST
- VE11CT
- VE11BT

## UTIČNICA ŠUKO + POKLOPAC 2P + E 16A 250V~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>  
 - 2P+E šuko+poklopac  
 - 16A 250V~, tip VE11



## SOCKET SCHUKO+COVER 2P+E 16A 250V~

- screw contacts 1.5-2.5mm<sup>2</sup>  
 - 2P+E schuko+cover  
 - 16A 250V~, type VE11



- VE12PW
- VE12IW
- VE12ES
- VE12CO
- VE12NB

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - 2P+E šuko  
 - 16A 250V~, tip VE12



## SOCKET SCHUKO 2P+E 16A 250V~ BV

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>  
 - 2P+E schuko  
 - 16A 250V~, type VE12



- VE13PT
- VE13IT
- VE13ST
- VE13CT
- VE13BT

## UTIČNICA ŠUKO + POKLOPAC 2P + E 16A 250V ~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>  
 - 2P+E šuko+poklopac  
 - 16A 250V~, tip VE13



## SOCKET SCHUKO+COVER 2P+E 16A 250V~ BV

- BV plug-in contacts 1.5-2.5mm<sup>2</sup>  
 - 2P+E schuko+cover  
 - 16A 250V~, type VE13

## S O C K E T S   V E



- VE40PWXO  
 VE40IWXO  
 VE40ESXO  
 VE40COXO  
 VE40NBXO  
 VE40RDXO  
 VE40GRXO  
 VE40ORXO

## UTIČNICA FRANCUSKA 2P + E 16A 250V ~ \_ XO

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- XO bez okvira
- 2P+E francuska
- 16A 250V~, tip VE40



- VE41PTXO  
 VE41ITXO  
 VE41STXO  
 VE41PTXO  
 VE41BTXO  
 VE41PPXO

## UTIČNICA FRANCUSKA + POKLOPAC 2P + E 16A 250V~ \_ XO

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- XO bez okvira
- 2P+E francuska+poklopac
- 16A 250V~, tip VE41



- VE42PWXO  
 VE42IWXO  
 VE42ESXO  
 VE42COXO  
 VE42NBXO  
 VE42RDXO  
 VE42GRXO  
 VE42ORXO

## UTIČNICA FRANCUSKA 2P + E 16A 250V~ BV \_ XO

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- XO bez okvira
- utičnica sa zaštitnim kontaktom francuska
- 16A 250V~, tip VE42



- VE43PTXO  
 VE43ITXO  
 VE43STXO  
 VE43PTXO  
 VE43BTXO  
 VE43PPXO

## UTIČNICA FRANCUSKA + POKLOPAC 2P + E 16A 250V~ BV \_ XO

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- XO bez okvira
- 2P+E francuska+poklopac
- 16A 250V~, tip VE43



- VE40PW  
 VE40IW  
 VE40ES  
 VE40CO  
 VE40NB

## UTIČNICA FRANCUSKA 2P + E 16A 250V ~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- 2P+E francuska
- 16A 250V~, tip VE40



- VE41PT  
 VE41IT  
 VE41ST  
 VE41CT  
 VE41BT

## UTIČNICA FRANCUSKA + POKLOPAC 2P + E 16A 250V~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- 2P+E francuska+poklopac
- 16A 250V~, tip VE41



- VE42PW  
 VE42IW  
 VE42ES  
 VE42CO  
 VE42NB

## UTIČNICA FRANCUSKA 2P + E 16A 250V ~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- utičnica sa zaštitnim kontaktom francuska
- 16A 250V~, tip VE42



- VE43PT  
 VE43IT  
 VE43ST  
 VE43CT  
 VE43BT

## UTIČNICA FRANCUSKA + POKLOPAC 2P + E 16A 250V ~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2P+E francuska+poklopac
- 16A 250V~, tip VE43



ekonomik



## UTIČNICA ŠUKO DVOSTRUKA 2P + E 16A 250V~

- VE16PWKS
- 
- VE16ESKS
- VE16NBKS

- 2P+E šuko dvostruka  
- 16A 250V~, tip VE16  
- sukladno normama IEC 60884-1, CEE7  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- KS zaštita od dodira kontaktata

## SOCKET SCHUKO DOUBLE 2P+E 16A 250V~

- 2P+E schuko double  
- 16A 250V~, type VE16  
- in accordance with IEC 60884-1, CEE7  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- KS shuttered live contacts



## UTIČNICA FRANCUSKA DVOSTRUKA 2P + E 16A 250V~

- VE46PWKS
- 
- VE46ESKS
- VE46NBKS

- 2P + E francuska dvostruka  
- 16A 250V~, tip VE46  
- sukladno normama IEC 60884-1, CEE7; NF C 61-314, CSN 33 2318; PN-E 93201  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>  
- KS zaštita od dodira kontaktata

## SOCKET FRENCH DOUBLE 2P+E 16A 250V~

- 2P+E French double  
- 16A 250V~, type VE46  
- in accordance with IEC 60884-1, CEE7; NF C 61-314, CSN 33 2318; PN-E 93201  
- screw contacts 1.5-2.5 mm<sup>2</sup>  
- KS shuttered live contacts




## UTIČNICA 2P 16A 250V ~

- VE30PW
- 
- VE30ES
- VE30NB

- 2P bez voda za uzemljjenje  
- 16A 250V~  
- sukladno normama EN 60884-1, CEE7 (lista standarda I)  
- vijčano pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>

## SOCKET 2P 16A 250V~

- 2P without earthing contact  
- 16A 250V~  
- in accordance with EN 60884-1, CEE7 (standard sheet I)  
- screw contacts 1.5-2.5mm<sup>2</sup>

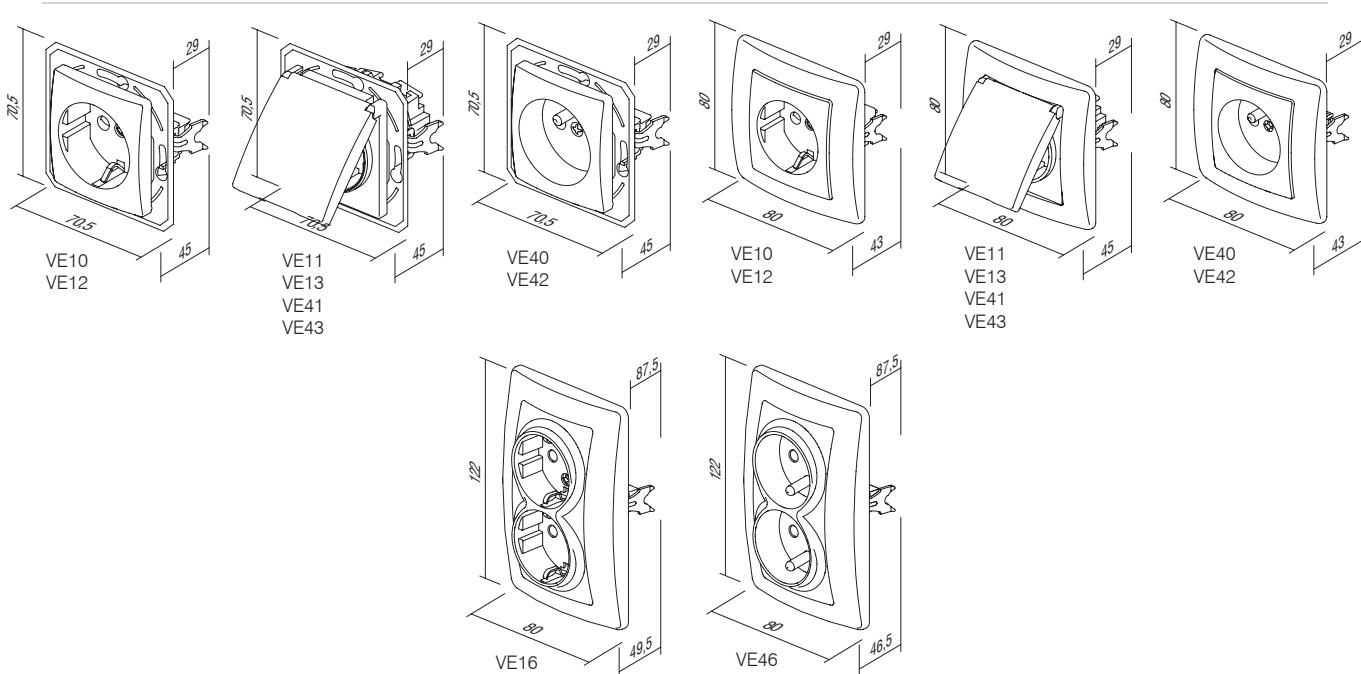



tip type	naziv description	tehnički podaci technical data	boja colour
KE11	UTIČNICA TV-R ZAVRŠNA SOCKET TV-R END-LINE	1dB	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
KE12	UTIČNICA TV-R PROLAZNA SOCKET TV-R THROUGHPASS	10dB	<input checked="" type="checkbox"/> IW bež sjajna <i>ivory white</i>
KE16	UTIČNICA SAT-TV-R ZAVRŠNA SOCKET SAT-TV-R END-LINE	3dB	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	<input type="checkbox"/> CO bijeli duropolast <i>white thermoset</i>
.	.	.	<input type="checkbox"/> NB crna sjajna <i>night black</i>



KE11


1 dB ← → 1,5 dB

**UTIČNICA TV-R ZAVRŠNA 1dB**

- TV-R završna
- propušta frekvenciju u rasponu 5÷862MHz
- prigušenje: R-1.5dB, TV-1dB
- sukladno normi EN 50083-1
- vijčano pričvršćivanje

**SOCKET TV-R END-LINE 1dB**

- TV-R end-line
- frequency range 5÷862MHz
- reduction: R-1.5dB, TV-1dB
- in accordance with EN 50083-1
- screw contacts




KE12

10 dB ← → 10 dB  
2 dB**UTIČNICA TV-R PROLAZNA 10dB**

- TV-R prolazna
- propušta frekvenciju u rasponu 5÷862MHz
- prigušenje: R-10dB, TV-10dB, prolaz-2dB
- sukladno normi EN 50083-1
- vijčano pričvršćivanje

**SOCKET TV-R THROUGHPASS 10dB**

- TV-R troughpass
- frequency range 5÷862MHz
- reduction: R-10dB, TV-10dB, trough-2dB
- in accordance with EN 50083-1
- screw contacts




KE16

3 dB  
1,5 dB ← → 1 dB**UTIČNICA SAT-TV-R ZAVRŠNA 3dB**

- SAT-TV-R završna
- propušta frekvenciju u rasponu 5÷2400MHz
- prigušenje: R-1dB, TV-1.5dB, SAT-3dB
- za ugradnju u okruglu kutiju Ø60 s nožicama ili vijcima
- sukladno normi EN 50083-1
- vijčano pričvršćivanje

**SOCKET SAT-TV-R END-LINE 3dB**

- SAT-TV-R end-line
- frequency range 5÷2400MHz
- reduction: R-1dB, TV-1.5dB, SAT-3dB
- for mounting in round box Ø60 with claws or screws
- in accordance with EN 50083-1
- screw contacts




KE36

- KS keystone standard pričvršćivanja
- RJ11 6/4
- sukladno normi IEC 60603-7

**SOCKET TEL KS RJ11 6/4**

- KS keystone fixing standard
- RJ11 6/4
- in accordance with IEC 60603-7






KE37

**UTIČNICA CAT5e KS RJ45 8/8**


- KS keystone standard pričvršćivanja
  - CAT5e, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT5e KS RJ45 8/8**
- KS keystone fixing standard
  - CAT5e, RJ45 8/8
  - in accordance with IEC 60603-7



KE40

**UTIČNICA CAT6s KS RJ45 8/8 SLIM**


- KS keystone standard pričvršćivanja
  - CAT6s, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT6s KS RJ45 8/8 SLIM**
- KS keystone fixing standard
  - CAT6s, RJ45 8/8
  - in accordance with IEC 60603-7



KE38

**UTIČNICA TEL KS DVOSTRUKA 2x RJ11 6/4**


- KS keystone standard pričvršćivanja
  - 2x RJ11 6/4
  - sukladno normi IEC 60603-7
- SOCKET TEL KS DOUBLE 2x RJ11 6/4**
- KS keystone fixing standard
  - 2x RJ11 6/4
  - in accordance with IEC 60603-7



KE39

**UTIČNICA CAT5e KS DVOSTRUKA 2x RJ45 8/8**


- KS keystone standard pričvršćivanja
  - 2x CAT5e, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT5e KS DOUBLE 2x RJ45 8/8**
- KS keystone fixing standard
  - 2x CAT5e, RJ45 8/8
  - in accordance with IEC 60603-7



KE41

**UTIČNICA CAT6s KS DVOSTRUKA 2x RJ45 8/8 SLIM**

- KS keystone standard pričvršćivanja
  - 2x CAT6s, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT6s KS DOUBLE 2x RJ45 8/8 SLIM**
- KS keystone fixing standard
  - 2x CAT6s, RJ45 8/8
  - in accordance with IEC 60603-7




KE45

**ADAPTER KS JEDNOSTRUKI**

- KS keystone standard priključivanja - jednostruki
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- nije ugrađen komunikacijski modul

**ADAPTER KS SINGLE**

- KS keystone fixing standard - single
- AMP, Avaya, Brandrex, FMT, Mfico, Tyco, ...
- communication module not included






KE46

**ADAPTER KS DVOSTRUKI**

- KS keystone standard priključivanja - dvostruki  
- AMP, Tyco, ...  
- nije ugrađen komunikacijski modul

**ADAPTER KS DOUBLE**

- KS keystone fixing standard - double  
- AMP, Tyco, ...  
- communication module not included




KE47

**ADAPTER PD DVOSTRUKI**

- standard pričvršćivanja PD Panduit Mini-COM – dvostruki  
- nije ugrađen komunikacijski modul

**ADAPTER PD DOUBLE**

- PD Panduit Mini-COM fixing standard - double  
- communication module not included



## UTIČNICA TV OSNOVNA 0dB



- KE10PW  
 KE10IW  
 KE10ES  
 KE10CO  
 KE10NB

- TV osnovna  
- prigušenje 0dB  
- stražnji konektor – F standard

## SOCKET TV BASIC 0dB

- TV basic  
- reduction 0dB  
- back connector – F standard



## UTIČNICA TV-R ZAVRŠNA 1dB



- KE11PW  
 KE11IW  
 KE11ES  
 KE11CO  
 KE11NB

- TV-R završna  
- propušta frekvenciju u rasponu 5÷862 MHz  
- prigušenje: R-1.5dB, TV-1dB  
- sukladno normi EN 50083-1  
- vijčano pričvršćivanje

## SOCKET TV-R END-LINE 1dB

- TV-R end-line  
- frequency range 5÷862 MHz  
- reduction: R-1.5dB, TV-1dB  
- in accordance with EN 50083-1  
- screw contact



## UTIČNICA TV-R PROLAZNA 10dB



- KE12PW  
 KE12IW  
 KE12ES  
 KE12CO  
 KE12NB

- TV-R prolazna  
- propušta frekvenciju u rasponu 5÷862 MHz  
- prigušenje: R-10dB, TV-10dB, prolaz-2dB  
- sukladno normi EN 50083-1  
- vijčano pričvršćivanje

## SOCKET TV-R TROUGHPASS 10dB

- TV-R troughpass  
- frequency range 5÷862 MHz  
- reduction: R-10dB, TV-10dB, trough-2dB  
- in accordance with EN 50083-1  
- screw contacts



## UTIČNICA SAT-TV-R ZAVRŠNA 3dB



- KE16PW  
 KE16IW  
 KE16ES  
 KE16CO  
 KE16NB

- SAT-TV-R završna  
- propušta frekvenciju u rasponu 5÷2400 MHz  
- prigušenje: R-1dB, TV-1.5dB, SAT-3dB  
- sukladno normi EN 50083-1  
- vijčano pričvršćivanje

## SOCKET SAT-TV-R END-LINE 3dB

- SAT-TV-R end-line  
- frequency range 5÷2400 MHz  
- reduction: R-1dB, TV-1.5dB, SAT-3dB  
- in accordance with EN 50083-1  
- screw contacts



## UTIČNICA AUDIO 2xRCA



- KE22PW  
 KE22IW  
 KE22ES  
 KE22CO  
 KE22NB

- audio 2xRCA  
- pričvršćivanje vodiča lemljenjem

## SOCKET AUDIO 2xRCA

- audio 2xRCA  
- soldering connection of cable



## UTIČNICA AUDIO ZVUČNICI



- KE23PW  
 KE23IW  
 KE23ES  
 KE23CO  
 KE23NB


- audio 2x Ø4 mm  
- pričvršćivanje vodiča za zvučnike umetanjem ili banana utikačem Ø4 mm  
- lemljenje spojeva kabela na stražnjoj strani

## SOCKET AUDIO LOUDSPEAKERS

- audio 2x Ø4mm  
- to accommodate speaker wire, banana plug Ø4mm or spades  
- soldering connection of cable at the back side



## UTIČNICA TEL KS RJ11 6/4

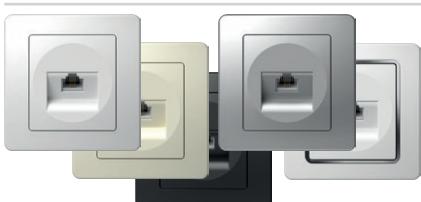

- KE36PW  
 KE36IW  
 KE36ES  
 KE36CO  
 KE36NB

- KS keystone standard pričvršćivanja  
- RJ11 6/4  
- sukladno normi IEC 60603-7

## SOCKET TEL KS RJ11 6/4

- KS keystone fixing standard  
- RJ11 6/4  
- in accordance with IEC 60603-7





- KE37PW
- KE37IW
- KE37ES
- KE37CO
- KE37NB

#### UTIČNICA CAT5e KS RJ45 8/8

- KS keystone standard pričvršćivanja
  - CAT5e, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT5e KS RJ45 8/8**
- KS keystone fixing standard
  - CAT5e, RJ45 8/8
  - in accordance with IEC 60603-7



- KE40PW
- KE40IW
- KE40ES
- KE40CO
- KE40NB

#### UTIČNICA CAT6s KS RJ45 8/8 SLIM

- KS keystone standard pričvršćivanja
  - CAT6s, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT6s KS RJ45 8/8 SLIM**
- KS keystone fixing standard
  - CAT6s, RJ45 8/8
  - in accordance with IEC 60603-7



- KE38PW
- KE38IW
- KE38ES
- KE38CO
- KE38NB

#### UTIČNICA TEL KS DVOSTRUKA 2x RJ11 6/4

- KS keystone standard pričvršćivanja
  - 2x RJ11, 6/4
  - sukladno normi IEC 60603-7
- SOCKET TEL KS DOUBLE 2x RJ11 6/4**
- KS keystone fixing standard
  - 2x RJ11, 6/4
  - in accordance with IEC 60603-7



- KE39PW
- KE39IW
- KE39ES
- KE39CO
- KE39NB

#### UTIČNICA CAT5e KS DVOSTRUKA 2x RJ45 8/8

- KS keystone standard pričvršćivanja
  - 2x CAT5e, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT5e KS DOUBLE 2x RJ45 8/8**
- KS keystone fixing standard
  - 2x CAT5e, RJ45 8/8
  - in accordance with IEC 60603-7



- KE41PW
- KE41IW
- KE41ES
- KE41CO
- KE41NB

#### UTIČNICA CAT6s KS DVOSTRUKA 2x RJ45 8/8 SLIM


- KS keystone standard pričvršćivanja
  - 2x CAT6s, RJ45 8/8
  - sukladno normi IEC 60603-7
- SOCKET CAT6s KS DOUBLE 2x RJ45 8/8 SLIM**
- KS keystone fixing standard
  - 2x CAT6s, RJ45 8/8
  - in accordance with IEC 60603-7




- KE35PW
- KE35IW
- KE35ES
- KE35CO
- KE35NB

#### UTIČNICA TEL LT RJ11 6/4

- TEL LT vijak
  - vijčano pričvršćivanje
  - RJ11 6/4
  - sukladno normi IEC 60603-7
- SOCKET TEL LT RJ11 6/4**
- TEL LT screw
  - screw contacts
  - RJ11 6/4
  - in accordance with IEC 60603-7

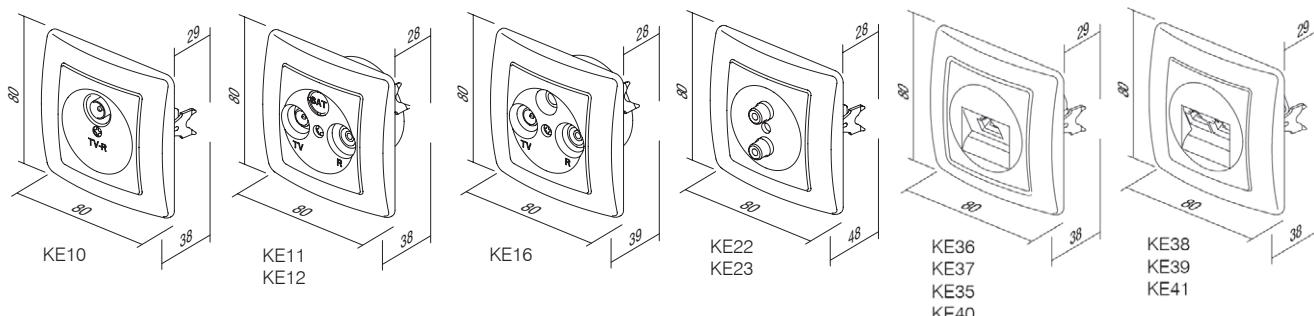

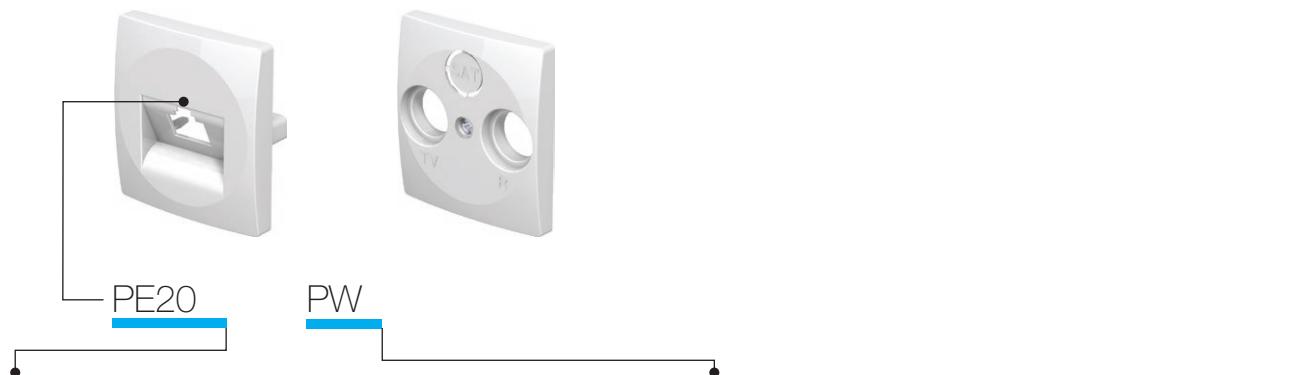

tip type	naziv description	tehnički podaci technical data	boja colour
PE10	POKLOPAC TV-R COVER TV-R	2P/3P	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
PE20	POKLOPAC KS JEDNOSTRUKI COVER KS SINGLE		<input type="checkbox"/> IW bež sjajna <i>ivory white</i>
PE21	POKLOPAC KS DVOSTRUKI COVER KS DOUBLE		<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	<input type="checkbox"/> CO bijeli duropolast <i>white thermoset</i>
.	.	.	<input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>

#### POKLOPAC TV-R 2P/3P




- PE10PW
- PE10IW
- PE10ES
- PE10CO
- PE10NB

- poklopac TV-R, 2P ili 3P s vijkom  
*COVER TV-R 2P/3P*  
- TV-R cover, 2P or 3P with screw



#### POKLOPAC KS JEDNOSTRUKI




- PE20PW
- PE20IW
- PE20ES
- PE20CO
- PE20NB

- KS poklopac jednostrukim  
*COVER KS SINGLE*  
- KS cover single



#### POKLOPAC KS DVOSTRUKI



- PE21PW
- PE21IW
- PE21ES
- PE21NB

- KS poklopac dvostruki  
*COVER KS DOUBLE*  
- KS cover double



#### POKLOPAC TAE/TDO



- PE30PW
- PE30IW
- PE30ES
- PE30NB

- TAE ili TDO poklopac s vijkom  
*COVER TAE/TDO*  
- TAE or TDO cover with screw









#### POKLOPAC IR SKLOPKA



- PE32PW
- PE32IW
- PE32ES
- PE32NB

- poklopac IR sklopka  
*COVER IR SWITCH*  
- cover IR switch



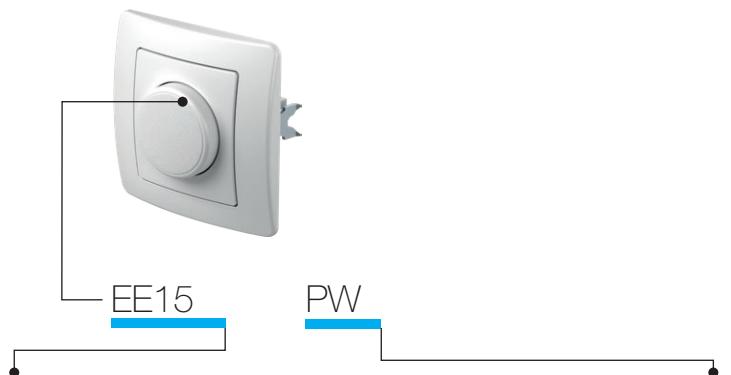

tip type	naziv description	tehnički podaci technical data	boja colour
EE15	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI <i>DIMMER ROTATIVE 2WAY</i>	RL 400W	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
EE16	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI <i>DIMMER ROTATIVE 2WAY</i>	RLC 400W	<input checked="" type="checkbox"/> IW bež sjajna <i>ivory white</i>
EE19	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI <i>DIMMER ROTATIVE 2WAY</i>	LED 100W	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	.	<input type="checkbox"/> CO bijeli duroplast <i>white thermoset</i>
.	.	.	<input type="checkbox"/> NB crna sjajna <i>night black</i>



EE15

**REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RL 400W**

- rotacijski s izmjeničnom sklopkom
- opterećenje RL, 40W – 400W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- unutarnji promjer tipke Ø6 mm
- priložen zamjenjivi osigurač

**DIMMER ROTATIVE 2WAY RL 400W**

- rotation control with 2-way switch
- load RL, 40W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V~ 50Hz
- button inner diameter Ø6mm
- replaceable fuse included



EE16

**REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RLC 400W**

- rotacijski s izmjeničnom sklopkom
- opterećenje RLC, 20W – 400W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- unutarnji promjer tipke Ø6 mm
- napajanje 230V ~ 50Hz
- elektronski osigurač

**DIMMER ROTATIVE 2WAY RLC 400W**

- rotation control with 2-way switch
- load RLC, 20W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V 50Hz
- button inner diameter Ø6mm
- electronic fuse



EE19

## REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI LED 100W

- rotacijski s izmjeničnom sklopkom
- opterećenje: LED, 0-100W (maks. 10 LED)  
GLS, 10-250W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- priložen zamjenjivi osigurač
- unutarnji promjer tipke Ø6 mm

## DIMMER ROTATIVE 2WAY LED 100W

- rotation control with 2-way switch
- load: LED, 0-100W (max. 10 LEDs)  
GLS, 10-250W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V~ 50Hz
- replaceable fuse included
- button inner diameter Ø6mm

## IR SKLOPKA 5A 230V~



- EE32A1  
 EE32A2

- IR infracrvena sklopka
- napajanje: 230V~ ± 10% 50Hz
- relej: 5A / 250V~ izlaz za ograničeni strujni tok s velikim otporom za prolaz kroz ništicu („zero crossing“)
- zaštitna razina: IP40
- presjek žica na kontaktnom terminalu: 0,75 - 2,5 mm<sup>2</sup>
- kut prepoznavanja: do 110° pri 20 °C
- raspon prepoznavanja: približno 8m pri 20 °C
- prilagodljivost trajanja: od približno 5 s do 12 min
- prilagodljivost osvjetljenja: od približno 5 do 200 LUX
- temperatura radnog okruženja: od 0 °C do +40 °C
- nije prikladno za ugradnju u kutije duboke 45 mm
- samo za unutrašnju uporabu

## IR SWITCH 5A 230V~

- IR infrared switch
- supply voltage: 230V~ ±10 % 50Hz
- relay: 5A / 250V~ output for limited current with high resistance for zero crossing
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm<sup>2</sup>
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes
- only for indoor usage

## REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RL 400W



- EE15PW  
 EE15IW  
 EE15ES  
 EE15CO  
 EE15NB

- rotacijski s izmjeničnom sklopkom
- opterećenje RL, 40W – 400W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- priložen zamjenjivi osigurač



## DIMMER ROTATIVE 2WAY RL 400W

- rotation control with 2-way switch
- load RL, 40W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V~ 50Hz
- replaceable fuse included



- EE16PW
- EE16IW
- EE16ES
- EE16CO
- EE16NB

#### REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RLC 400W

- rotacijski s izmjeničnom sklopkom
- opterećenje RLC, 20W - 400W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- elektronski osigurač



#### DIMMER ROTATIVE 2WAY RLC 400W

- rotation control with 2-way switch
- load RLC, 20W - 400W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V ~ 50Hz
- electronic fuse



- EE19PW
- EE19IW
- EE19ES
- EE19CO
- EE19NB

#### REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI LED 100W

- rotacijski s izmjeničnom sklopkom
- opterećenje: LED, 0-100W (maks. 10 LED)  
GLS, 10-250W
- moguća je kombinacija s izmjeničnom sklopkom
- povezivanje više regulatora osvjetljenja nije dopušteno
- sukladno normama EN 60669-1 i EN 60669-2-1
- bezvijčani kontakti 1,5mm<sup>2</sup>
- napajanje 230V ~ 50Hz
- priložen zamjenjivi osigurač



#### DIMMER ROTATIVE 2WAY LED 100W

- rotation control with 2-way switch
- load: LED, 0-100W (max. 10 LEDs)  
GLS, 10-250W
- 2-way switch combination is possible
- more dimmers combination is not allowed
- in accordance with EN 60669-1 and EN 60669-2-1
- plug-in contacts 1.5mm<sup>2</sup>
- supply 230V ~ 50Hz
- replaceable fuse included



- EE32PW
- EE32IW
- EE32ES
- EE32CO
- EE32NB

#### IR SKLOPKA 5A 230V~


- IR infracrvena sklopka
- napajanje: 230V~ ± 10% 50Hz
- relej: 5A / 250V~ izlaz za ograničeni strujni tok s velikim otporom za prolaz kroz ništicu („zero crossing“)
- zaštitna razina: IP40
- presjek žica na kontaktnom terminalu: 0,75 - 2,5 mm<sup>2</sup>
- kut prepoznavanja: do 110° pri 20 °C
- raspon prepoznavanja: približno 8m pri 20 °C
- prilagodljivost trajanja: od približno 5 s do 12 min
- prilagodljivost osvjetljenja: od približno 5 do 200 LUX
- temperatura radnog okruženja: od 0 °C do +40 °C
- nije prikladno za ugradnju u kutije duboke 45 mm
- samo za unutrašnju uporabu




#### IR SWITCH 5A 230V~

- IR infrared switch
- supply voltage: 230V~ ±10 % 50Hz
- relay: 5A / 250V~ output for limited current with high resistance for zero crossing
- protection rating: IP40
- cross-section of wires at the contact terminal: 0.75 - 2.5 mm<sup>2</sup>
- detection angle: up to 110° at 20°C
- detection area: approx. 8 m at 20°C
- adjustability of duration: from approx. 5 s to 12 min
- adjustability of brightness: from approx. 5 to 200 LUX
- operating temperature: from 0°C to +40°C
- not suitable for installation in 45 mm deep boxes
- only for indoor usage


EE15, EE16, EE19




EE15, EE16, EE19

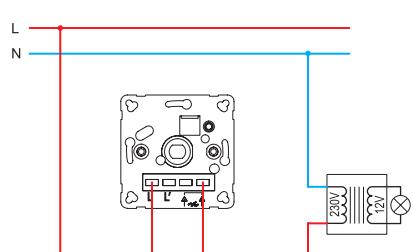


EE16, EE19

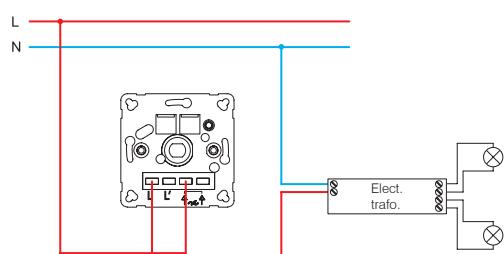


EE15, EE16, EE19

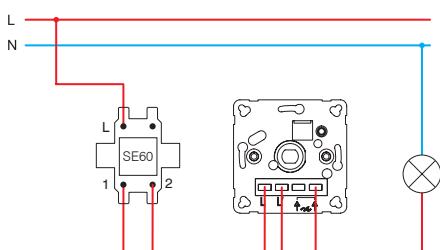


EE15, EE16, EE19

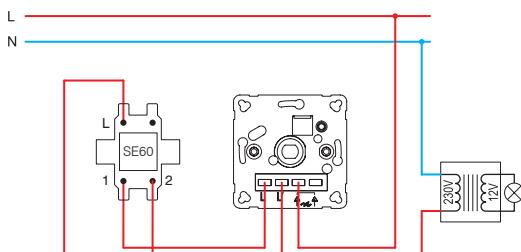

EE16, EE19

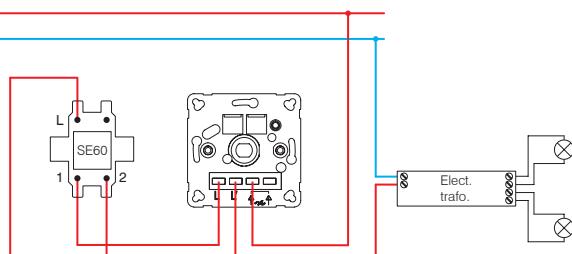


EE15 (40-400W)



1 - žarulja sa žarnom niti /  
incandescent lamp

2 - halogena žarulja /  
halogen lamp


EE16 (20-400W)

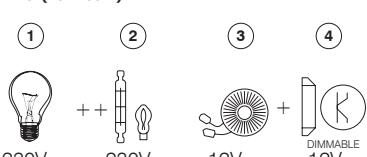




3 - klasični transformator /  
classical transformer

4 - elektronički transformator s regulatorom osvjetljenja /  
dimmable electronic transformer


EE19 (GLS 10-250W ; LED 0-100W)

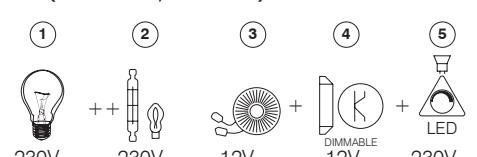

5 - LED tinjajica s regulacijom osvjetljenja /  
dimmable LED lamp



## P O K L O P C I   P E

		
tip type	naziv description	boja colour
PE41	POKLOPAC REGULATORA OSVJETLJENJA <i>COVER DIMMER</i>	<input type="checkbox"/> PW bijela sjajna <i>polar white</i> <input type="checkbox"/> IW bež sjajna <i>ivory white</i> <input type="checkbox"/> ES srebrna mat <i>elox silver</i> <input type="checkbox"/> CO bijeli duroplost <i>white thermoset</i> <input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>




- PE41PW
- PE41IW
- PE41ES
- PE41CO
- PE41NB


## POKLOPAC REGULATORA OSVJETLJENJA Ø6

- poklopac regulatora osvjetljenja Ø6 mm
- za EE15, EE16, EE19
- COVER DIMMER Ø6***
- *cover dimmer Ø6mm*
- *for EE15, EE16, EE19*



ekonomik



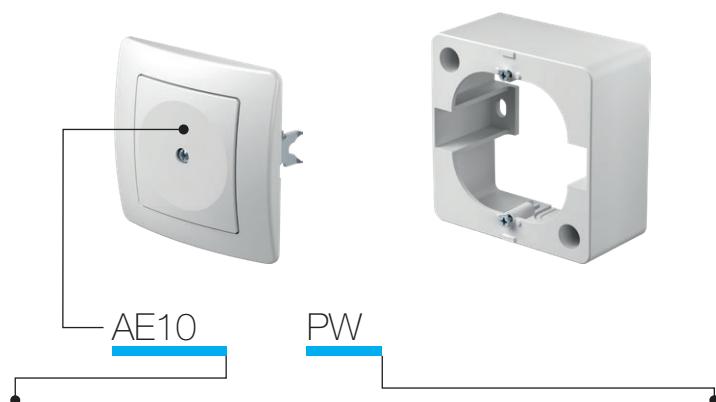

tip type	naziv description	boja colour
AE10	SLIJEPI ELEMENT <i>BLANK</i>	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
AE20	PRIKLJUČNA KUTIJA 3P + N + E 5X4mm <sup>2</sup> <i>CONNECTION BOX 3P+N+E 5x4mm<sup>2</sup></i>	<input type="checkbox"/> IW bež sjajna <i>ivory white</i>
AE30	NADŽBUKNA KUTIJA <i>SURFACE MOUNT BOX</i>	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
.	.	<input type="checkbox"/> CO bijeli duroplast <i>white thermoset</i>
.	.	<input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>

#### SLIJEPI ELEMENT



- AE10PW
- AE10IW
- AE10ES
- AE10CO
- AE10NB

- za pokrivanje praznog prostora

#### BLANK

- *for filling up empty spaces*



#### PRIKLJUČNA KUTIJA 5-POLNA 3P + N + E 5x4mm<sup>2</sup>



- AE20PW
- AE20IW

- priključna kutija 3P+N+E

- 16A 400V

- sukladno normi VDE 0606-1:2000

- vijčano pričvršćivanje vodiča presjeka 1,5-4mm<sup>2</sup>

#### CONNECTION BOX 5POLE 3P+N+E 5x4mm<sup>2</sup>

- 3P+N+E connection box


- 16A 400V

- in accordance with VDE 0606-1:2000

- screw contacts 1.5-4mm<sup>2</sup>



#### NADŽBUKNA KUTIJA 1



- AE30PW
- AE30IW


- nadžbukna kutija

#### SURFACE MOUNT BOX 1

- surface mounting box



#### NADŽBUKNA KUTIJA ZA DVOSTRUKU UTIČNICU EKONOMIK




- AE31PW

- nadžbukna kutija

#### SURFACE MOUNT BOX FOR EKONOMIK DOUBLE SOCKET

- surface mounting box



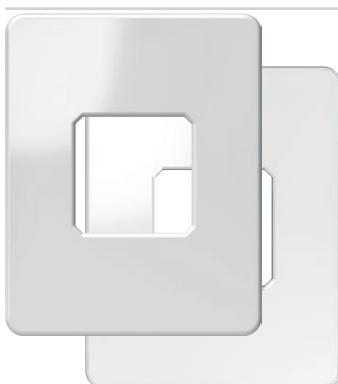


AE50PW  
 AE50TS

#### ZIDNI ŠTITNIK

- štiti površinu oko utičnice ili sklopke

#### WALL PROTECTION

- protects surface around socket or switch

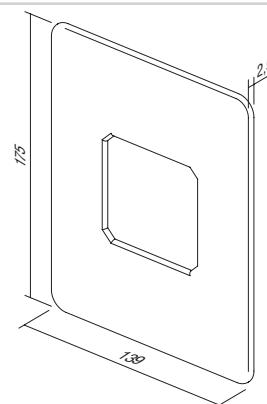



AE51PW  
 AE51IW



#### ZAŠTITA ZA DJECU KS





- KS dodatna zaštita za djecu od dodira kontakta

#### CHILD PROTECTION KS

- KS additional child protection insert - shuttered live contacts

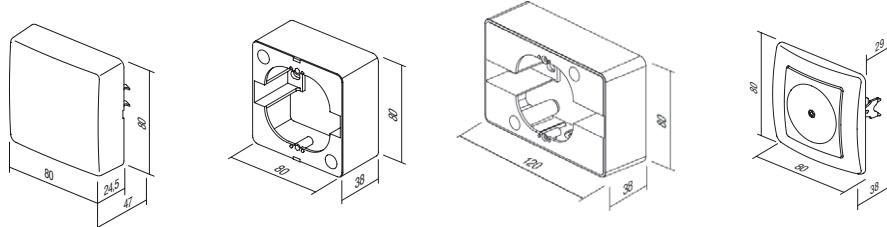

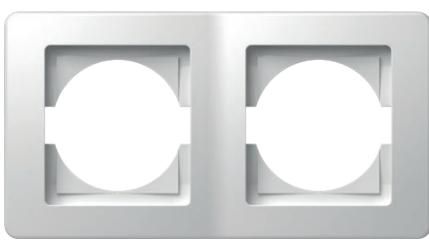	
OE10	PW
tip type	naziv description
OE10	OKVIR EKONOMIK 1 <i>SURROUND EKONOMIK 1</i>
OE20	OKVIR EKONOMIK 2 VODORAVNI <i>SURROUND EKONOMIK 2 HORIZONTAL</i>
OE30	OKVIR EKONOMIK 3 VODORAVNI <i>SURROUND EKONOMIK 3 HORIZONTAL</i>
.	.
.	.
	boja colour
	<input type="checkbox"/> PW bijela sjajna <i>polar white</i>
	<input type="checkbox"/> IW bež sjajna <i>ivory white</i>
	<input type="checkbox"/> ES srebrna mat <i>elox silver</i>
	<input type="checkbox"/> CO bijeli duroplast <i>white thermoset</i>
	<input checked="" type="checkbox"/> NB crna sjajna <i>night black</i>

	<b>OKVIR EKONOMIK 1</b> <input type="checkbox"/> OE10PW <input type="checkbox"/> OE10IW <input type="checkbox"/> OE10ES <input type="checkbox"/> OE10CO <input checked="" type="checkbox"/> OE10NB <p>- dekorativni pojedinačni okvir  - sukladno normi EN 60669-1  <b>SURROUND EKONOMIK 1</b>  - decorative surround 1-gang  - in accordance with EN 60669-1</p>	
	<b>OKVIR EKONOMIK 2 VODORAVNI</b> <input type="checkbox"/> OE20PW <input type="checkbox"/> OE20IW <input type="checkbox"/> OE20ES <input type="checkbox"/> OE20CO <input checked="" type="checkbox"/> OE20NB <p>- dekorativni dvostruki okvir vodoravni  - sukladno normi EN 60669-1  <b>SURROUND EKONOMIK 2 HORIZONTAL</b>  - decorative surround 2-gang horizontal  - in accordance with EN 60669-1</p>	
	<b>OKVIR EKONOMIK 2 OKOMITI</b> <input type="checkbox"/> OE21PW <input type="checkbox"/> OE21IW <input type="checkbox"/> OE21ES <input type="checkbox"/> OE21CO <input checked="" type="checkbox"/> OE21NB <p>- dekorativni dvostruki okvir okomiti  - sukladno normi EN 60669-1  <b>SURROUND EKONOMIK 2 VERTICAL</b>  - decorative surround 2-gang vertical  - in accordance with EN 60669-1</p>	
	<b>OKVIR EKONOMIK 3 VODORAVNI</b> <input type="checkbox"/> OE30PW <input type="checkbox"/> OE30IW <input type="checkbox"/> OE30ES <input type="checkbox"/> OE30CO <input checked="" type="checkbox"/> OE30NB <p>- dekorativni trostruki okvir vodoravni  - sukladno normi EN 60669-1  <b>SURROUND EKONOMIK 3 HORIZONTAL</b>  - decorative surround 3-gang horizontal  - in accordance with EN 60669-1</p>	




- OE31PW
- OE31IW
- OE31ES
- OE31CO
- OE31NB

#### OKVIR EKONOMIK 3 OKOMITI

- dekorativni trostruki okvir okomiti
- sukladno normi EN 60669-1

#### SURROUND EKONOMIK 3 VERTICAL

- decorative surround 3-gang vertical
- in accordance with EN 60669-1




- OE40PW
- OE40IW
- OE40ES
- OE40NB

#### OKVIR EKONOMIK 4 VODORAVNI

- dekorativni četverostruki okvir vodoravni
- sukladno normi EN 60669-1

#### SURROUND EKONOMIK 4 HORIZONTAL

- decorative surround 4-gang horizontal
- in accordance with EN 60669-1




- OE41PW
- OE41IW
- OE41ES
- OE41NB

#### OKVIR EKONOMIK 4 OKOMITI

- dekorativni četverostruki okvir okomiti
- sukladno normi EN 60669-1

#### SURROUND EKONOMIK 4 VERTICAL

- decorative surround 4-gang vertical
- in accordance with EN 60669-1




- OE50PW
- OE50IW
- OE50ES
- OE50NB

#### OKVIR EKONOMIK 5 VODORAVNI

- dekorativni peterostruki horizontalni okvir
- sukladno normi EN 60669-1

#### SURROUND EKONOMIK 5 HORIZONTAL

- decorative surround 5-gang horizontal
- in accordance with EN 60669-1

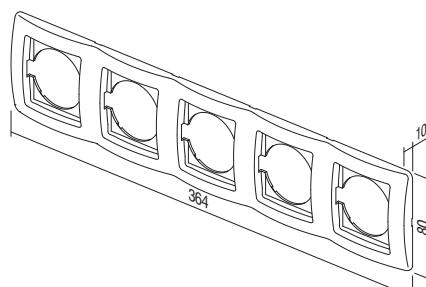

Ekonomik

DEKORATIVNI UMETCI U BOJI /  
COLOR DECORATIVE FRAMES



OE90GR	ZELENI / GREEN	OE90YL	ŽUTI / YELLOW	OE90MB	MET. PLAVI / MET. BLUE
OE90BL	PLAVI / BLUE	OE90WH	BIJELI / WHITE	OE90BZ	BRONČANI / BRONZE
OE90VO	LJUBIČASTI / VIOLET	OE90GY	SIVI / GREY	OE90CR	SREBRNI / SILVER
OE90PI	RUŽIČASTI / PINK	OE90BK	CRNI / BLACK	OE90GO	ZLATNI / GOLD
OE90RD	CRVENI / RED				





**TEM**



KATALOG / CATALOGUE

**fontana**

---

**SKLOPKE SF**  
**SWITCHES SF**

218

---

**UTIČNICE VF**  
**SOCKETS VF**

220

---


**SETOVI CF**  
**SETS CF**

221

---

**PRIBOR AF**  
**ACCESSORIES AF**

223

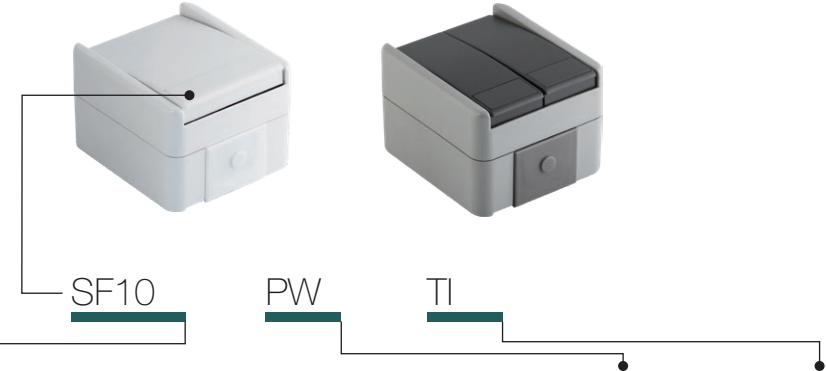

tip type	naziv description	tehnički podaci technical data	boja colour	opcijiski podaci 1 optional data 1
SF10	SKLOPKA JEDNOPOLNA SWITCH 1WAY	IP44 10AX 250V~	<input type="checkbox"/> PW bijela mat(RAL 9016) <input checked="" type="checkbox"/> GY mat siva	TI neonska tinjalica + indikator neon lamp+indication
SF11	TIPKALO JEDNOPOLNO PUSH BUTTON 1WAY	IP44 10A 250V~	<input checked="" type="checkbox"/> GY mat siva <input type="checkbox"/> PW bijela mat	grey-mat
SF20	SKLOPKA DVOPOLNA SWITCH 2POLE	IP44 10AX 250V~		
.	.	.		
.	.	.		

**SKLOPKA JEDNOPOLNA IP44 10AX 250V ~**

SF10PW  
 SF10GY

- 10AX 250V~, tip SF10
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 1WAY IP44 10AX 250V~**
- 10AX 250V~, type SF10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>

**SKLOPKA JEDNOPOLNA IP44 10AX 250V ~ \_ TI**

SF10PWTI  
 SF10GYTI

- TI indikator + neonska tinjalica
- 10AX 250V~, tip SF10
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 1WAY IP44 10AX 250V~ \_ TI**
- TI indicator+neon lamp
- 10AX 250V~, type SF10
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>

**TIPKALO JEDNOPOLNO IP44 10A 250V~ \_ TI**

SF11PWTI  
 SF11GYTI

- TI indikator + neonska tinjalica
- 10A 250V~, tip SF11
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 1WAY IP44 10A 250V~ \_ TI**
- TI indicator+neon lamp
- 10A 250V~, type SF11
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>

**SKLOPKA DVOPOLNA IP44 10AX 250V ~**

SF20PWTI  
 SF20GYTI

- 10AX 250V~, tip SF20
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2POLE IP44 10AX 250V~**
- 10AX 250V~, type SF20
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>





SF50PW  
 SF50GY

#### SKLOPKA SERIJSKA JEDNOPOLNA IP44 10AX 250V ~

- 10AX 250V~, tip SF50
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2GANG-1WAY IP44 10AX 250V~**
- 10AX 250V~, type SF50
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



SF51PW  
 SF51GY

#### TIPKALO SERIJSKO JEDNOPOLNO IP44 10A 250V ~

- 10A 250V~, tip SF51
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- PUSH BUTTON 2GANG-1WAY IP44 10A 250V~**
- 10A 250V~, type SF51
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



SF60PW  
 SF60GY

#### SKLOPKA IZMJENIČNA IP44 10AX 250V ~

- 10AX 250V~, tip SF60
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2WAY IP44 10AX 250V~**
- 10AX 250V~, type SF60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



SF60PWTI  
 SF60GYTI

#### SKLOPKA IZMJENIČNA IP44 10AX 250V ~ \_ TI

- TI indikator + neonska tinjalica
- 10AX 250V~, tip SF60
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2WAY IP44 10AX 250V~ \_ TI**
- TI indicator+neon lamp
- 10AX 250V~, type SF60
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



SF63PW  
 SF63GY

#### SKLOPKA IZMJENIČNA DVOSTRUKA IP44 10AX 250V ~


- 10AX 250V~, tip SF63
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH 2WAY DOUBLE IP44 10AX 250V~**
- 10AX 250V~, type SF63
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>



SF70PW  
 SF70GY

#### SKLOPKA KRIŽNA IP44 10AX 250V ~

- 10AX 250V~, tip SF70
- sukladno normi EN 60669-1
- bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- SWITCH INTERMEDIATE IP44 10AX 250V~**
- 10AX 250V~, type SF70
- in accordance with EN 60669-1
- plug-in contacts 1.5-2.5mm<sup>2</sup>

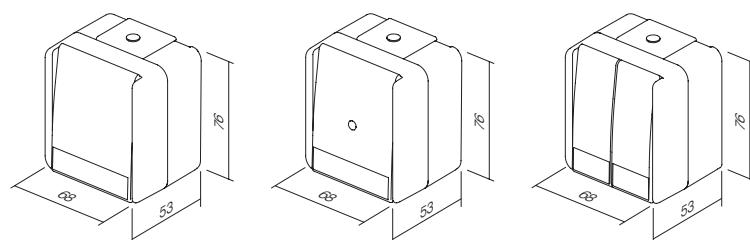



VF10      PW

tip type	naziv description	tehnički podaci technical data	boja colour
VF10	ŠUKO UTIČNICA+POKLOPAC SOCKET SCHUKO+COVER	IP44 2P+E 16A 250V~	<input type="checkbox"/> PW bijela mat (RAL 9016) <i>white-mat</i> <input checked="" type="checkbox"/> GY mat siva <i>grey-mat</i>



#### UTIČNICA ŠUKO + POKLOPAC IP44 2P+E 16A 250V ~

VF10PW  
 VF10GY


- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
  - 2P+E šuko+poklopac
  - 16A 250V~, tip VF10
  - sukladno normama EN 60884-1, CEE7
- SOCKET SCHUKO+COVER IP44 2P+E 16A 250V~**
- screw contacts 1.5-2.5mm<sup>2</sup>
  - 2P+E schuko+cover
  - 16A 250V~, type VF10
  - in accordance with EN 60884-1, CEE7



#### UTIČNICA ŠUKO + POKLOPAC IP44 2P+E 16A 250V ~ BV

VF12PW  
 VF12GY

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
  - 2P+E šuko+poklopac
  - 16A 250V~, tip VF12
  - sukladno normama EN 60884-1, CEE7
- SOCKET SCHUKO+COVER IP44 2P+E 16A 250V~ BV**
- BV plug-in contacts 1.5-2.5mm<sup>2</sup>
  - 2P+E schuko+cover
  - 16A 250V~, type VF12
  - in accordance with EN 60884-1, CEE7



SF10  
SF60

tip type	naziv description	tehnički podaci technical data	boja colour
CF10	SET ŠUKO UTIČNICA DVOSTRUKIH VODORAVNE SOCKET SET SCHUKO DOUBLE HORIZ	2x 2P+E 16A 250V~ IP44 <input type="checkbox"/> PW	bijela mat (RAL 9016) white-mat
CF11	SET ŠUKO UTIČNICA DVOSTRUKIH OKOMITE SOCKET SET SCHUKO DOUBLE VERT	2x 2P+E 16A 250V~ IP44 <input checked="" type="checkbox"/> GY	mat siva grey-mat
CF12	ŠUKO UTIČNICA + SKLOPKA IZMJENIČNI VODORAVNI SOCKET SCH+SWITCH 2WAY HORIZ	16A + 10A 250V~ IP44	.
.	.	.	.



CF10PW  
 CF10GY

#### SET ŠUKO UTIČNICA, DVOSTRUKI, VODORAVNI IP44 2x 2P+E 16A 250V ~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- 2x 2P+E šuko + poklopac vodoravni
- 16A 250V~, tip CF10
- sukladno normama EN 60884-1, CEE7

**SOCKET SET SCHUKO DOUBLE HORIZONTAL IP44 2x 2P+E 16A 250V~**

- screw contacts 1.5-2.5mm<sup>2</sup>
- 2x 2P+E schuko+cover horizontal
- 16A 250V~, type CF10
- in accordance with EN 60884-1, CEE7



#### SET ŠUKO UTIČNICA DVOSTRUKI, OKOMITI IP44 2x 2P+E 16A 250V ~

- vijčano pričvršćivanje vodiča presjeka 1,5-2,5 mm<sup>2</sup>
- 2x 2P+E šuko + poklopac, okomiti set
- 16A 250V~, tip CF11
- sukladno normama EN 60884-1, CEE7

**SOCKET SET SCHUKO DOUBLE VERTICAL IP44 2x 2P+E 16A 250V~**

- screw contacts 1.5-2.5mm<sup>2</sup>
- 2x 2P+E schuko+cover vertical
- 16A 250V~, type CF11
- in accordance with EN 60884-1, CEE7



CF11PW  
 CF11GY



#### SET ŠUKO UTIČNICA + SKLOPKA IZMJENIČNA, VODORAVNI IP44 16A + 10AX 250V ~

- vijčano (priključnica), bezvijčano (sklopka) pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- 2P+E šuko+poklopac + sklopka izmjenična vodoravna
- 16A + 10AX 250V~, tip CF12
- sukladno normama EN 60884-1, CEE7, EN 60669-1

**SOCKET SCH+SWITCH SET 2WAY HORIZONTAL IP44 16A + 10AX 250V~**

- screw (socket), plug-in (switch)  
contacts 1.5-2.5mm<sup>2</sup>
- 2P+E schuko+cover + switch 2-way horizontal
- 16A + 10AX 250V~, type CF12
- in accordance with EN 60884-1, CEE7, EN 60669-1



CF12PW  
 CF12GY





CF13PW  
 CF13GY

#### SET ŠUKO UTIČNICA + SKLOPKA IZMJENIČNA, OKOMITI, IP44 16A + 10AX 250V~

- vijčano (priključnica), bezvijčano (sklopka)
- pričvršćivanje vodiča presjeka 1,5-2,5mm<sup>2</sup>
- 2P+E šuko+potklopac + sklopka izmjenična okomita
- 16A + 10AX 250V~, tip CF13
- sukladno normama EN 60884-1, CEE7, EN 60669-1



CF14PW  
 CF14GY

#### SET ŠUKO UTIČNICA DVOSTRUKI, VODORAVNI, IP44 2X 2P+E 16A 250V~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2x 2P+E šuko + potklopac vodoravni
- 16A 250V~, tip CF14
- sukladno normama EN 60884-1, CEE7



CF15PW  
 CF15GY

#### SET ŠUKO UTIČNICA DVOSTRUKI, OKOMITI, IP44 2X 2P+E 16A 250V~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2x 2P+E šuko + potklopac, okomiti set
- 16A 250V~, tip CF15
- sukladno normama EN 60884-1, CEE7



CF16PW  
 CF16GY

#### SET UTIČNICA + SKLOPKA IZMJENIČNA, VODORAVNI, IP44 16A + 10AX 250V~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2P+E šuko+potklopac + sklopka izmjenična vodoravna
- 16A + 10AX 250V~, tip CF16
- sukladno normama EN 60884-1, CEE7, EN 60669-1



CF17PW  
 CF17GY

#### SET UTIČNICA + SKLOPKA IZMJENIČNA, OKOMITI, IP44 16A + 10AX 250V~ BV

- BV bezvijčani kontakti 1,5-2,5mm<sup>2</sup>
- 2P+E šuko+potklopac + sklopka izmjenična okomita
- 16A + 10AX 250V~, tip CF17
- sukladno normama EN 60884-1, CEE7, EN 60669-1



P R I B O R A F  
A C C E S S O R I E S


			
AF10	PW		
tip type	naziv description	tehnički podaci technical data	boja colour
AF10	RAZDJELNI ORMARIĆ <i>DISTRIBUTION BOX</i>	IP44 RN01	<input type="checkbox"/> PW bijela mat (RAL 9016) <i>white-mat</i>
AF20	RAZDJELNI ORMARIĆ <i>DISTRIBUTION BOX</i>	IP55 ND01	<input checked="" type="checkbox"/> GY mat siva <i>grey-mat</i>



RAZDJELNI ORMARIĆ IP44 RN01

AF10PW  
 AF10GY



- nadžbukni razdjelni ormarić IP44
  - 16A 400V ~
  - sukladno normi IEC/EN 60670-1, IEC/EN 60670-22
- DISTRIBUTION BOX IP44 RN01**
- surface mounting distribution box IP44
  - 16A 400V~
  - In accordance with IEC/EN 60670-1, IEC/EN 60670-22




RAZDJELNI ORMARIĆ IP55 ND01

AF20PW  
 AF20GY


- nadžbukna priključna kutija IP55
  - brtve uključene
  - sukladno normi IEC/EN 60670-1, IEC/EN 60670-22
- DISTRIBUTION BOX IP55 ND01**
- surface mounting connection box IP55
  - glands included
  - In accordance with IEC/EN 60670-1, IEC/EN 60670-22




CF10  
CF14

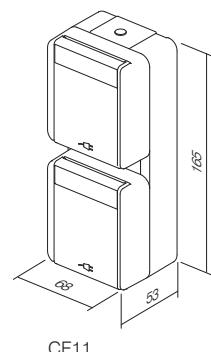

CF11  
CF15



CF12  
CF16

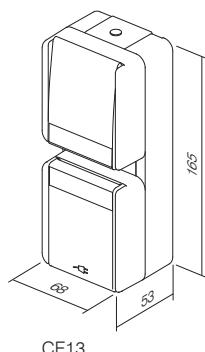

CF13  
CF17

# MODUL —

šifra	opis proizvoda	stranica	šifra	opis proizvoda	stranica
<b>SKLOPKA SM</b>			<b>KOMUNIKACIJE KM</b>		
SM10	SKLOPKA JEDNOPOLNA 16AX 250V~ 1M	68	KM10--	UTIČNICA TV OSNOVNA 0dB 1M	82
SM11	TIPKALO JEDNOPOLNO 16A 250V~ 1M	68	KM20--	UTIČNICA TV OSNOVNA 0dB 2M	82
SM12	SKLOPKA JEDNOPOLNA 20A 250V~ 1M	68	KM11--	UTIČNICA TV ZAVRSNA 1dB 1M	82
SM20	SKLOPKA DVOPOLNA 16AX 250V~ 1M	68	KM12--	UTIČNICA TV PROLAZNA 10dB 1M	82
SM40	SKLOPKA ŽALUZIJSKA 1-0-2 16AX 250V~ 1M	69	KM15--	UTIČNICA SAT OSNOVNA 0dB 1M	83
SM41	TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M	69	KM24--	UTIČNICA SAT OSNOVNA 0dB 2M	83
SM60	SKLOPKA IZMJENIČNA 16AX 250V~ 1M	69	KM16--	UTIČNICA SAT ZAVRŠNA 1dB 1M	83
SM61	TIPKALO IZMJENIČNO 16A 250V~ 1M	69	KM19--	UTIČNICA R OSNOVNA 0dB 1M	83
SM70	SKLOPKA KRIŽNA 16AX 250V~ 1M	69	KM29--	UTIČNICA R OSNOVNA 0dB 2M	83
SM10--IN	SKLOPKA JEDNOPOLNA 16AX 250V~ 1M IN	70	KM25--	UTIČNICA SAT-TV ZAVRŠNA 1dB 2M	83
SM11--	TIPKALO JEDNOPOLNO 16A 250V~ 1M	70	KM22--	UTIČNICA AUDIO 2xRCA 1M	84
SM11--IN01	TIPKALO JEDNOPOLNO 16A 250V~ 1M IN 01	70	KM23--	UTIČNICA AUDIO ZVUČNICI 1M	84
SM11--IN02	TIPKALO JEDNOPOLNO 16A 250V~ 1M IN 02	71	KM26--	UTIČNICA AUDIO ZVUČNICI 2M	84
SM20--NT03	SKLOPKA DVOPOLNA 16AX 250V~ 1M NT 03	71	KM30--	UTIČNICA TEL LT RJ11 6/4 1M	85
SM20--IN	SKLOPKA DVOPOLNA 16AX 250V~ 1M IN	71	KM31--	UTIČNICA TEL BT SEC 6/6 1M	85
SM40--NT10	SKLOPKA ŽALUZIJSKA 1-0-2 16AX 250V~ 1M NT 10	71	KM36--	UTIČNICA TEL KS RJ11 6/4 1M	85
SM41--NT10	TIPKALO ŽALUZIJSKO 1-0-2 16A 250V~ 1M NT 10	71	KM37--	UTIČNICA CAT5e KS RJ45 8/8 1M	85
SM60--	SKLOPKA IZMJENIČNA 16AX 250V~ 1M	71	KM35--	ADAPTER KS 1M	85
SM61--	TIPKALO IZMJENIČNO 16A 250V~ 1M	72	KM38--	ADAPTER KS SA ZAŠTITOM OD PRAŠINE 1M	85
SM62--CD	TIPKALO IZMJENIČNO S UZICOM 16A 250V~ 1M CD	72	KM39--	UTIČNICA CAT6 SCH KS RJ45 8/8 1M	86
SM70--	SKLOPKA KRIŽNA 16AX 250V~ 1M	72	KM50--	ADAPTER KS UNIVERZALNI 1M	86
<b>TIPKE TM</b>			KM40--	ADAPTER PD 1M	86
TM11--	TIPKA 1M	73	KM43--	ADAPTER PD SA ZAŠTITOM OD PRAŠINE 1M	86
TM11--IN	TIPKA 1M INDIKATOR	73	KM46--	ADAPTER R&M 1M	86
TM12--	TIPKA 2M	73	KM52--	ADAPTER R&M CAT6A 1M	86
TM12--IN	TIPKA 2M INDIKATOR	73	KM47--	ADAPTER R&M SA ZAŠTITOM OD PRAŠINE 1M	87
TM13--IL	TIPKA 2M S NATPISNOM PLOČICOM	74	KM53--	ADAPTER R&M CAT6A SA ZAŠTITOM OD PRAŠINE 1M	87
TM15--	TIPKA 1M DVOPOLNA	74	KM45--	ADAPTER LK 1M	88
TM21--	SLJEPI ELEMENT 1M	74	KA26	ADAPTER NEXSANS/SCHRACK 2M	88
TM22--	SLJEPI ELEMENT 2M	74	KM48--	ADAPTER AT&T SYSTIMAX SA ZAŠTITOM OD PRAŠINE 1M	88
TM31--	UVODNICA 1M	74	KM51--	UTIČNICA USB TIP A 1M	88
<b>OSVETLJENJE IA</b>			<b>DODACI KOMUNIKACIJA KA</b>		
IA10--	NEONSKA TINJALICA 230V~ 0,34W	76	KA10	KONEKTOR KS CAT3 RJ11 6/4	89
IA20--	LED TINJALICA 230V~ AC/DC 0,40W	76	KA11	KONEKTOR KS CAT5e RJ45 8/8	89
IA21--	LED TINJALICA 24V AC/DC 0,20W	76	KA12	KONEKTOR KS CAT5eS RJ45 8/8	89
IA22--	LED TINJALICA 12V AC/DC 0,10W	76	KA15	KONEKTOR KS CAT6 SCHRACK RJ45 8/8	89
IA50	RC SKLOP 250V	76	KA16	KONEKTOR KS CAT6S SCHRACK RJ45 8/8	89
<b>UTIČNICE VM</b>			KA17	KONEKTOR KS CAT6a SCHRACK RJ45 8/8	89
VM10--	UTIČNICA ŠUKO+KS 2P+E 16A 250V~ 2M	78	KA18	KONEKTOR TANKI KS CAT6S SCHRACK RJ45 8/8	90
VM11--	UTIČNICA ŠUKO+KS+POKLOPAC 2P+E 16A 250V~ 2M	78	KA27	KONEKTOR KS HDMI	90
VM20--	UTIČNICA EURO+KS 2P 10A 250V~ 1M	79	KA28	KABEL KS HDMI	90
VM40--	UTIČNICA FRANCUSKA+KS 2P+E 16A 250V~ 2M	79	<b>ELEKTRONIKA EM</b>		
VM41--	UTIČNICA FRANCUSKA+KS+POKLOPAC 2P+E 16A 250V~ 2M	79	EM10--	REGULATOR OSVETLJENJA ROTACIJSKI R 300W 1M	91
VM30--	UTIČNICA TALIJANSKA P17/11+KS 2P+E 16A 250V~ 1M	79	EM12--	REGULATOR OSVETLJENJA ROTACIJSKI IZMJENIČNI RL 300W 1M	91
VM31--	UTIČNICA ŠUKO TALIJANSKA P17/11+KS 2P+E 16A 250V~ 2M	79	EM13--	REGULATOR OSVETLJENJA ROTACIJSKI IZMJENIČNI LED 60W 1M	92
VM32--	UTIČNICA ŠUKO TALIJANSKA P30+KS 2P+E 16A 250V~ 2M	80	EM14--	REGULATOR OSVETLJENJA ROTACIJSKI IZMJENIČNI LED 180W 1M	92
VM33--	UTIČNICA TALIJANSKA P11+KS 2P+E 10A 250V~ 1M	80	EM15--	REGULATOR OSVETLJENJA ROTACIJSKI R 250W 1M	92
VM21--	UTIČNICA EURO/AMERIČKA+KS 2P 16A 250V~ 1M	80	EM23	UGRADBENI ZATAMNJIVAČ R (250 W), (RC, RL 200VA)	93
VM51--	UTIČNICA BRITANSKA BS546+KS 2P+E 15A 250V~ 2M	80	EM18	UGRADBENI ZATAMNJIVAČ LED 250 W	93
VM52--	UTIČNICA BRITANSKA BS 1363+KS 2P+E 13A 250V~ 2M	80	EM19	UGRADBENI ZATAMNJIVAČ DC LED 96 W	93
VM80	PRENAPONSKA ZAŠTITA MPE MINI 275V/50Hz	80	EM25--	SKLOPKA/REGULATOR OSVETLJENJA UNIVEZALNI RLC 0-300W 2M	95
			EM26--	UPRAVLJAČKA JEDINICA - TIPKALO 2M	97
			EM27	FREKVENCUSKI FILTAR	97
			EM25PPOL20	SET SKLOPKA/REGULATOR OSVERLJENJA UNIVERZALNI RLC 0-300W 2M PP OL20	97
			EM31--	IR SKLOPKA 5A 250V~ 1M	98
			EM32--	IR SKLOPKA 5A 250V~ 2M	98
			EM37--	TERMOSTAT OSNOVNI 6A 230V~2M	100
			NM39	NOSAČ S VJCIMAZA TERMOSTATE FANTINI COSMI 3M	101
			EM40--	ŠTEDNA KARTIČNA SKLOPKA 3A 250V~ 3M	101
			EM47	KARTICA ISO	101
			EM44--	ŠTEDNA KARTIČNA SKLOPKA RF HF 13,56MHz 3M	102
			EM49	ŠTEDNA KONTROLNA JEDINICA 2x16A 250V~	102
			EM45	RAZDCAJAČ SPL-1	102
			EM60--	UTIČNICA ZA BRIJAČI APARAT 230V~/120V~ 3M	103
			EM66--	JEDINICA NAPAJANJA 5V 2,1A 1M	103
			EM65--	USB PUNJAČ 5V 1A 2M	103
			EM67--	JEDINICA NAPAJANJA 5V 2,4A 1M	104
			EM55	LED SVJETILJKA ZA SLUČAJ NUŽDE 250V~ 0,9W, NiCd 3h 7M	104
			EM57	LED SVJETILJKA ZA SLUČAJ NUŽDE 230V~ 50 Hz 0,5W, NiMH 2h 2M	104
			EM50--	LED SVJETILJKA JEDNOBOJNA 250V~ 0,8W 2M	105
			EM51--	LED SVJETILJKA DVODOBJNA 250V~ 2x0,4W 2M	105
			EM52--	LED SVJETILJKA 3D DVODOBJNA 250V~ 2x0,4W 2M	105
			EM71--	PREKIDAČ NA OTISK PRSTA BIOPASS 2M	106
			EM80--	SKLOPKA BESKONTAKTNA 10A 240V~	107
			EM81--	SKLOPKA BESKONTAKTNA, UPRAVLJAČKA JEDINICA	107
			EM90--	ZVONO 8VA 230V~ 1M	108
			EM91--	ZVONO 8VA 12V 1M	108
			EM92--	ZVONO 8VA 230V~ 1M	108
			EM93--	ZVONO 8VA 12V 1M	108
			EM95--	REGULATOR GLASNOĆE ZA 100V AUDIO LINIJU 35W 2M	109
			EM96--	REGULATOR GLASNOĆE 4-8 Ω 35W 2M	109

K U T I J E —		
šifra	opis proizvoda	stranica
<b>SETOVI CM</b>		
CM10--	SET UTIČNICA 2x ŠUKO 2P+E 16A 250V~ 4M	110
CM11--	SET UTIČNICA 3x ŠUKO 2P+E 16A 250V~ 7M	110
CM15	SET SPOJNIH VODOVA 3x1,5mm <sup>2</sup> 1M	111
CM16	SET SPOJNIH VODOVA 3x2,5mm <sup>2</sup> 2M	111
CM17	SET VIJAKA 3,5x20	111
CM18	SET VIJAKA 3,5x35	111
CM19	SET VIJAKA 3,5x50	111
CM22--	SET ZA SKLOPKE IP44 2M	111
CM23--	SET ZA UTIČNICU IP44 2M	111
CM25--OL	KUPAONSKI SET 3x20AX 250V~ 4M	111
CM25--OS	KUPAONSKI SET 3x20AX 250V~ 4M	111
NM41	NOSAČI ZA KUPAONSKI SET 4M	112
OL41--	OKVIR LINE ZA KUPAONSKI SET	112
OS41--	OKVIR SOFT ZA KUPAONSKI SET	112
<b>ANTIBAKTERIJSKI PROGRAM AW</b>		
TM11AW	TIPKA 1M	115
TM11AWIN	TIPKA 1M INDIKATOR	115
TM12AW	TIPKA 2M	115
TM12AWIN	TIPKA 2M INDIKATOR	115
TM21AW	SLJEPI ELEMENT 1M	115
TM22AW	SLJEPI ELEMENT 2M	115
VM10AW	UTIČNICA ŠUKO + KS 2P+E 16A 250V~ 2M	116
VM11AW	VTIČNICA ŠUKO + KS + POKLOPAC 2P+E 16A 250V~ 2M	116
VM20AW	UTIČNICA EURO + KS 2P 10A 250V~ 1M	116
KM11AW	UTIČNICA TV ZAVRŠNA 1dB 1M	116
KM35AW	ADAPTER KS 1M	116
OS20AW	OKVIR SOFT 2M	117
OS24AW	OKVIR SOFT 2x2M	117
OS26AW	OKVIR SOFT 3x2M	117
OS30AW	OKVIR SOFT 3M	117
OS40AW	OKVIR SOFT 4M	117
OS70AW	OKVIR SOFT 7M	117
<b>OKVIRI PURE OP</b>		
OP20--	OKVIR PURE 2M	120
OP24--	OKVIR PURE 2x2M	120
OP26--	OKVIR PURE 3x2M	120
OP28--	OKVIR PURE 4x2M	120
OP30--	OKVIR PURE 3M	121
OP40--	OKVIR PURE 4M	121
OP70--	OKVIR PURE 7M	121
OP13--	OKVIR PURE 1/3M	121
OP23--	OKVIR PURE 2/3M	121
<b>OKVIRI LINE OL</b>		
OL20--	OKVIR LINE 2M	124
OL24--	OKVIR LINE 2x2M	124
OL26--	OKVIR LINE 3x2M	124
OL28--	OKVIR LINE 4x2M	124
OL29--	OKVIR LINE 5x2M	124
OL30--	OKVIR LINE 3M	125
OL40--	OKVIR LINE 4M	125
OL70--	OKVIR LINE 7M	125
OL10--	OKVIR LINE 1/2M	125
OL13--	OKVIR LINE 1/3M	125
OL23--	OKVIR LINE 2/3M	125
<b>OKVIRI SOFT OS</b>		
OS20--	OKVIR SOFT 2M	128
OS24--	OKVIR SOFT 2x2M	128
OS26--	OKVIR SOFT 3x2M	128
OS28--	OKVIR SOFT 4x2M	128
OS30--	OKVIR SOFT 3M	129
OS40--	OKVIR SOFT 4M	129
OS70--	OKVIR SOFT 7M	129
OS72--	OKVIR SOFT 2x7M	129
OS10--	OKVIR SOFT 1/2M	129
OS13--	OKVIR SOFT 1/3M	129
OS23--	OKVIR SOFT 2/3M	129
<b>NOSAČI MM</b>		
NM20	NOSAČ S NOŽICAMA 2M	134
NM21	NOSAČ BEZ VIJAKA 2M	134
NM24	NOSAČ METALNI S NOŽICAMA 2M	134
NM25	NOSAČ METALNI BEZ VIJAKA 2M	134
NM30	NOSAČ S VIJCIMA 3M	135
NM40	NOSAČ S VIJCIMA 4M	135
NM70	NOSAČ S VIJCIMA 7M	135
NM72	NOSAČ S VIJCIMA 2x7M	135
NM10	NOSAČ S NOŽICAMA 1/2M	136
NM11	NOSAČ BEZ VIJAKA 1/2M	136
NM23	NOSAČ S NOŽICAMA 2/3M	136
NM32	NOSAČ S VIJCIMA 2/3M	136
<b>KUTIJE OKRUGLE</b>		
DE10	KUTIJA OKRUGLA ZA ZID OD OPEKE SM60-01	140
DE11	KUTIJA OKRUGLA ZA ZID OD OPEKE DUBOKA SM60-06	140
DE30	VEZNI ČLAN SM60-03	140
DE31	VEZNI ČLAN SM60-04	140
DE12	KUTIJA OKRUGLA ZA ZID OD OPEKE MD65-46	141
DE13	KUTIJA OKRUGLA ZA ZID OD OPEKE DUBOKA MD65-60	141
DE14	PRODUŽETAK ZA MD65-46	141
DE32	VEZNI ČLAN MD65-71	141
DE33	VEZNI ČLAN MD65-91	141
DE20	POKLOPAC KUTIJE ZAŠTITNI 60	141
DE21	POKLOPAC KUTIJE ZAŠTITNI 65	141
DE22	POKLOPAC KUTIJE DEKORATIVNI SM60	141
HE10	KUTIJA OKRUGLA ZA ŠUPLJE ZIDOVE SM68x40	144
HE11	KUTIJA OKRUGLA ZA ŠUPLJE ZIDOVE SM68x55	144
BE10	KUTIJA OKRUGLA ZA BETON 60-49	144
BE11	KUTIJA OKRUGLA ZA BETON DUBOKA 60-77	144
BE20	NOSAČ KUTIJE ZA BETON	144
BE21	UVODNICA ZA KUTIJO ZA BETON 16	144
<b>PRAVOKUTNE KUTIJE</b>		
DM30	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM3	148
DM31	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM3-65	148
DM40	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM4	148
DM41	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM4-65	148
DM70	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM7	149
DM71	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM7-65	149
DM72	KUTIJA PRAVOKUTNA ZA ZID OD OPEKE PM7-65	149
DM80	VEZNI ČLAN KUTIJE PM	149
DM33	POKLOPAC KUTIJE ZAŠTITNI PM3	150
DM34	POKLOPAC KUTIJE DEKORATIVNI PM3	150
DM43	POKLOPAC KUTIJE ZAŠTITNI PM4	150
DM44	POKLOPAC KUTIJE DEKORATIVNI PM4	150
DM73	POKLOPAC KUTIJE ZAŠTITNI PM7	150
DM74	POKLOPAC KUTIJE DEKORATIVNI PM7	150
DM75	POKLOPAC KUTIJE DEKORATIVNI PM72	151
HM30	KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM3	152
HM40	KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM4	152
HM70	KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM7	152
HM72	KUTIJA PRAVOKUTNA ZA ŠUPLJE ZIDOVE VM72	152
BM30	PRAVOKUTNA KUTIJA ZA BETON BM3	153
BM40	PRAVOKUTNA KUTIJA ZA BETON BM4	153
BM70	PRAVOKUTNA KUTIJA ZA BETON BM7	153
BM80	PRIČVRSTNI KOMBI-DRŽAČ BM	153
BM82	VEZNI PROFIL ZA KUTIJE	153
<b>PRIKLJUČNE KUTIJE</b>		
DW10	KUTIJA PRIKLJUČNA OKRUGLA ZA ZID OD OPEKE DSM78	156
HW10	KUTIJA PRIKLJUČNA OKRUGLA ZA ŠUPLJE ZIDOVE SM78x45	156
DE23	POKLOPAC KUTIJE DEKORATIVNI SM78	156
DE24	POKLOPAC KUTIJE ZAŠTITNI 78	156
HW20	KUTIJA PRIKLJUČNA ČETVRTASTA ZA ZID OD OPEKE SM105x105	156
<b>PRIBOR ZA OŽIĆENJE</b>		
UW10--	JEDNOREDNE STEZALJKE ZATVORENE PC 2x2,5mm <sup>2</sup> 10P	158
UW11--	JEDNOREDNE STEZALJKE ZATVORENE PC 2x4,0mm <sup>2</sup> 10P	158
UW12--	JEDNOREDNE STEZALJKE ZATVORENE PC 2x6,0mm <sup>2</sup> 10P	158
UW15--	JEDNOREDNE STEZALJKE PA 2x2,5mm <sup>2</sup> 12P	158
UW16--	JEDNOREDNE STEZALJKE PA 2x4mm <sup>2</sup> 12P	158
UW17--	JEDNOREDNE STEZALJKE PA 2x6mm <sup>2</sup> 12P	158
UW29--	DVOREDNE STEZALJKE PP 1,0-4,0mm <sup>2</sup> 12P	158
UW30--	DVOREDNE STEZALJKE PP 1,5-6,0mm <sup>2</sup> 12P	158
UW31--	DVOREDNE STEZALJKE PP 2,5-10,0mm <sup>2</sup> 12P	158
UW32--	DVOREDNE STEZALJKE PP 4,0-16,0mm <sup>2</sup> 12P	158
UW25--	DVOREDNE STEZALJKE PA 1,0-4,0mm <sup>2</sup> 12P	159
UW26--	DVOREDNE STEZALJKE PA 1,5-6,0mm <sup>2</sup> 12P	159
UW27--	DVOREDNE STEZALJKE PA 2,5-10,0mm <sup>2</sup> 12P	159
UW28--	DVOREDNE STEZALJKE PA 4,0-16,0mm <sup>2</sup> 12P	159
UW40--	BEZVUČANE REDNE STEZALJKE PA 1,5mm <sup>2</sup> 3P	159
UW41--	BEZVUČANE REDNE STEZALJKE PA 1,5mm <sup>2</sup> 5P	159
UW42--	BEZVUČANE REDNE STEZALJKE PA 1,5mm <sup>2</sup> 8P	159
UW45--	BEZVUČANE REDNE STEZALJKE PA 2,5mm <sup>2</sup> 3P	159
UW46--	BEZVUČANE REDNE STEZALJKE PA 2,5mm <sup>2</sup> 4P	159
UW47--	BEZVUČANE REDNE STEZALJKE PA 2,5mm <sup>2</sup> 5P	159
UW50--	BEZVUČANE REDNE STEZALJKE PA 2,5mm <sup>2</sup> 2/1P	159

## distribucija —

šifra	opis proizvoda	stranica
<b>KUĆIŠTA CUBO IP20 AC</b>		
AC11--	KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 1M	162
AC21--	KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 2M	162
AC41--	KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 4M	162
AC61--	KUTIJA NO CUBO SA STRAŽNJIM POKLOPCEM IP20 6M	162
<b>KUĆIŠTA CUBO IP55 AQ</b>		
AQ20--	KUĆIŠTE NO CUBO IP55 2M	163
AQ22--	KUĆIŠTE NO CUBO IP55 2x2M	163
AQ30--	KUĆIŠTE NO CUBO IP55 3M	163
AQ31--	KUĆIŠTE PO CUBO IP55 3M	163
AQ21--	KUTIJA PO CUBO IP55 2M	164
<b>PARAPETNI KANALI ALUMINIJSKI MA</b>		
RT10	ADAPTER MA 92	165
RT12--	POKLOPAC MA 92 2/3M	165
RT14--	POKLOPAC MA 92 4M	165
RT17--	POKLOPAC MA 92 7M	165
RT20--	OSNOVA KANALA MA 130x65	166
RT21--	OSNOVA KANALA MA 165x65	166
RT25--	POKLOPAC KANALA MA 92	166
RT30	PREGRADA MA 43	166
RT31	PREGRADA MA 43 AL	166
RT32	PREGRADA MA 43 AL DVOSTRUKA	166
RT35--	ZAVRŠNI ELEMENT MA 130x65	167
RT36--	ZAVRŠNI ELEMENT MA 165x65	167
RT38	RAVNI VEZNI ELEMENT MA 65	167
RT40--	UNIVERZALNI KUT MA 130x65	167
RT41--	UNIVERZALNI KUT MA 165x65	167
RT42	ELEMENT ZA UZEMLJENJE MA 2x A6,3	167
RT43--	L-KOMAD ELEMENT MA 130x65	168
RT44--	L-KOMAD ELEMENT MA 165x65	168
RT45--	T-KOMAD MA 130x65	168
RT46--	T-KOMAD MA 165x65	168
RT50--	NOSAČ STUPIĆA MA JEDNOSTRUKE 130x65	169
RT51--	NOSAČ STUPIĆA MA DVOSTRUKE 130x65	169
RT52--	STUPIĆ MA 130x65x500	169
RT53--	STUPIĆ MA DVOSTRUKE 130x130x500	169
<b>PODNE KUTIJE MT</b>		
RB30	PODNA KUTIJA MT 7 H=53mm	171
RB40	PODNA KUTIJA MT 7 H=88mm	171
RB31	SPOJNA PRIRUBNICA PODNE KUTIJE MT 7 H=53mm	171
RB41	SPOJNA PRIRUBNICA PODNE KUTIJE MT 7 H=88mm	171
RB33	PODNA KUTIJA MT 14 H=53mm	171
RB43	PODNA KUTIJA MT 14 H=88mm	171
RB34	SPOJNA PRIRUBNICA PODNE KUTIJE MT 14 H=53mm	172
RB44	SPOJNA PRIRUBNICA PODNE KUTIJE MT 14 H=88mm	172
RB36	PODNA KUTIJA MT 21 H=53mm	172
RB46	PODNA KUTIJA MT 21 H=88mm	172
RB37	SPOJNA PRIRUBNICA PODNE KUTIJE MT 21 H=53mm	172
RB47	SPOJNA PRIRUBNICA PODNE KUTIJE MT 21 H=88mm	172
<b>RAZVODNI ORMARI MO</b>		
RB10	ADAPTER ZA DIN-TRAČNICU 35mm 1M	173
RB11	ADAPTER ZA DIN-TRAČNICU 35mm 2M	173
RB20	RAZDJELNI ORMARIĆ MO 12+2	174
RB21	RAZDJELNI ORMARIĆ MO 24+4	174
RB22	RAZDJELNI ORMARIĆ MO 36+6	174
RB23	RAZDJELNI ORMARIĆ MO 48+8	174

## ekonomik —

šifra	opis proizvoda	stranica
<b>PREKIDAČI SE</b>		
SE10	SKLOPKA JEDNOPOLNA 10AX 250V~	188
SE11	TIPKALO JEDNOPOLNO 10A 250V~	188
SE22	SKLOPKA DVOPOLNA 16AX 250V~	188
SE50	SKLOPKA SERIJSKA JEDNOPOLNA 10AX 250V~	188
SE51	TIPKALO SERIJSKO JEDNOPOLNO 10A 250V~	189
SE52	SKLOPKA ŽALUZIJSKA 10AX 250V~	189
SE53	TIPKALO ŽALUZIJSKO 10A 250V~	189
SE60	SKLOPKA IZMJENIČNA 10AX 250V~	189
SE63	SKLOPKA IZMJENIČNA DVOSTRUKA 10AX 250V~	189
SE70	SKLOPKA KRIŽNA 10AX 250V~	189
SE10--	SKLOPKA JEDNOPOLNA 10AX 250V~	190
SE10--IN	SKLOPKA JEDNOPOLNA 10AX 250V~ IN	190
SE11--	TIPKALO JEDNOPOLNO 10A 250V~	190
SE11--T150	TIPKALO JEDNOPOLNO 10A 250V~ TI 50	190
SE11--T151	TIPKALO JEDNOPOLNO 10A 250V~ TI 51	190
SE11--IL	TIPKALO JEDNOPOLNO 10A 250V~ IL	190
SE22--IN03	SKLOPKA DVOPOLNA 10AX 250V~ IN 03	190
SE50--	SKLOPKA SERIJSKA JEDNOPOLNA 10AX 250V~	191
SE51--	TIPKALO SERIJSKO JEDNOPOLNO 10A 250V~	191
SE52--NT09	SKLOPKA ŽALUZIJSKA 10AX 250V~ NT 09	191
SE53--NT09	TIPKALO ŽALUZIJSKO 10A 250V~ NT 09	191
SE60--	SKLOPKA IZMJENIČNA 10AX 250V~	191
SE63--	SKLOPKA IZMJENIČNA DVOSTRUKA 10AX 250V~	191
SE70--	SKLOPKA KRIŽNA 10AX 250V~	191
<b>TIPKE TE</b>		
TE10--	TIPKA OBICNA	192
TE10--IN	TIPKA INDIKATOR	192
TE13--IL	TIPKA S NATPISNOM PLOCICOM	192
TE11--	TIPKA SERIJSKA	192
<b>INDIKACIJA IA</b>		
IA10--	NEONSKA TINJALICA 230V~ 0,34W	193
IA20--	LED TINJALICA 230V~ AC/DC 0,40W	193
IA21--	LED TINJALICA 24V AC/DC 0,20W	193
IA22--	LED TINJALICA 12V AC/DC 0,10W	193
<b>UTIČNICE VE</b>		
VE10--X0	UTIČNICA ŠUKO 2P+E 16A 250V~ X0	196
VE11--X0	UTIČNICA ŠUKO+POKLOPAC 2P+E 16A 250V~ X0	196
VE12--X0	UTIČNICA ŠUKO 2P+E 16A 250V~ BV X0	196
VE13--X0	UTIČNICA ŠUKO+POKLOPAC 2P+E 16A 250V~ BV X0	196
VE10--	UTIČNICA ŠUKO 2P+E 16A 250V~	196
VE11--	UTIČNICA ŠUKO+POKLOPAC 2P+E 16A 250V~	196
VE12--	UTIČNICA ŠUKO 2P+E 16A 250V~ BV	196
VE13--	UTIČNICA ŠUKO+POKLOPAC 2P+E 16A 250V~ BV	196
VE40--X0	UTIČNICA FRANCUSKA 2P+E 16A 250V~ X0	197
VE41--X0	UTIČNICA FRANCUSKA+POKLOPAC 2P+E 16A 250V~ X0	197
VE42--X0	UTIČNICA FRANCUSKA 2P+E 16A 250V~ BV X0	197
VE43--X0	UTIČNICA FRANCUSKA+POKLOPAC 2P+E 16A 250V~ BV X0	197
VE40--	UTIČNICA FRANCUSKA 2P+E 16A 250V~	197
VE41--	UTIČNICA FRANCUSKA+POKLOPAC 2P+E 16A 250V~	197
VE42--	UTIČNICA FRANCUSKA 2P+E 16A 250V~ BV	197
VE43--	UTIČNICA FRANCUSKA+POKLOPAC 2P+E 16A 250V~ BV	197
VE16--	UTIČNICA ŠUKO DVOSTRUKA 2P+E 16A 250V~	198
VE46--	UTIČNICA FRANCUSKA DVOSTRUKA 2P+E 16A 250V~	198
VE30--	UTIČNICA 2P 16A 250V~	198
<b>KOMUNIKACIJE KE</b>		
KE11	UTIČNICA TV-R ZAVRŠNA 1dB	199
KE12	UTIČNICA TV-R PROLAZNA 10dB	199
KE16	UTIČNICA SAT-TV-R ZAVRŠNA 3dB	199
KE36	UTIČNICA TEL KS RJ11 6/4	199
KE37	UTIČNICA CAT5e KS RJ45 8/8	200
KE40	UTIČNICA CAT6s KS RJ45 8/8 SLIM	200
KE38	UTIČNICA TEL KS DVOSTRUKA 2x RJ11 6/4	200
KE39	UTIČNICA CAT5e KS DVOSTRUKA 2x RJ45 8/8	200
KE41	UTIČNICA CAT6s KS DVOSTRUKA 2x RJ45 8/8 SLIM	200
KE45	ADAPTER KS JEDNOSTRUKI	200
KE46	ADAPTER KS DVOSTRUKI	201
KE47	ADAPTER PD DVOSTRUKI	201
KE10--	UTIČNICA TV OSNOVNA 0dB	202
KE11--	UTIČNICA TV-R ZAVRŠNA 1dB	202
KE12--	UTIČNICA TV-R PROLAZNA 10dB	202
KE16--	UTIČNICA SAT-TV-R ZAVRŠNA 3dB	202
KE22--	UTIČNICA AUDIO 2xRCA	202
KE23--	UTIČNICA AUDIO ZVUČNICI	202
KE36--	UTIČNICA TEL KS RJ11 6/4	202
KE37--	UTIČNICA CAT5e KS RJ45 8/8	203
KE40--	UTIČNICA CAT6s KS RJ45 8/8 SLIM	203
KE38--	UTIČNICA TEL KS DVOSTRUKA 2x RJ11 6/4	203
KE39--	UTIČNICA CAT5e KS DVOSTRUKA 2x RJ45 8/8	203
KE41--	UTIČNICA CAT6s KS DVOSTRUKA 2x RJ45 8/8 SLIM	203
KE35--	UTIČNICA TEL LT RJ11 6/4	203

šifra	opis proizvoda	stranica
<b>POKLOPCI ZA KOMUNIKACIJE PA</b>		
PE10--	POKLOPAC TV-R 2P/3P	204
PE20--	POKLOPAC KS JEDNOSTRUKI	204
PE21--	POKLOPAC KS DVOSTRUKI	204
PE30--	POKLOPAC TAE/TDO	204
PE32--	POKLOPAC IR SKLOPKA	204
<b>ELEKTRONIKA EE</b>		
EE15	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RL 400W	205
EE16	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RLC 400W	205
EE19	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI LED 100W	206
EE15--	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RL 400W	206
EE16--	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI RLC 400W	207
EE19--	REGULATOR OSVJETLJENJA ROTACIJSKI IZMJENIČNI LED 100W	207
EE32--	IR SKLOPKA 5A 230V~	207
<b>POKLOPCI ELEKTRONIKE PE</b>		
PE41--	POKLOPAC REGULATOR OSVJETLJENJA Ø6	209
<b>PRIBOR AE</b>		
AE10--	SLIJEPI ELEMENT	210
AE20--	PRIKLJUČNA KUTIJA 5-POLNA 3P+N+E 5x4mm <sup>2</sup>	210
AE30--	NADŽBUKNA KUTIJA 1	210
AE31--	NADŽBUKNA KUTIJA ZA DVOSTRUKE UTIČNICE EKONOMIK	210
AE50--	ZIDNI ŠTITNIK	211
AE51--	ZAŠTITA ZA DJECU KS	211
<b>OKVIRI OE</b>		
OE10--	OKVIR EKONOMIK 1	212
OE20--	OKVIR EKONOMIK 2 VODORAVNI	212
OE21--	OKVIR EKONOMIK 2 OKOMITI	212
OE30--	OKVIR EKONOMIK 3 VODORAVNI	212
OE31--	OKVIR EKONOMIK 3 OKOMITI	213
OE40--	OKVIR EKONOMIK 4 VODORAVNI	213
OE41--	OKVIR EKONOMIK 4 OKOMITI	213
OE50--	OKVIR EKONOMIK 5 VODORAVNI	213
OE90--	DEKORATIVNI UMETCI U BOJI	214
<b>fontana</b>		
šifra	opis proizvoda	stranica
<b>SKLOPKE SF</b>		
SF10--	SKLOPKA JEDNOPOLNA IP44 10AX 250V~	218
SF10-TI	SKLOPKA JEDNOPOLNA IP44 10AX 250V~ TI	218
SF11-TI	TIPKALO JEDNOPOLNO IP44 10A 250V~ TI	218
SF20--	SKLOPKA DVOPOLNA IP44 10AX 250V~	218
SF50--	SKLOPKA SERIJSKA IP44 10AX 250V~	219
SF51--	TIPKALO SERIJSKO IP44 10A 250V~	219
SF60--	SKLOPKA IZMJENIČNA IP44 10AX 250V~	219
SF60-TI	SKLOPKA IZMJENIČNA IP44 10AX 250V~ TI	219
SF63--	SKLOPKA IZMJENIČNA DVOSTRUKA IP44 10AX 250V~	219
SF70--	SKLOPKA KRIŽNA IP44 10AX 250V~	219
<b>UTIČNICE VF</b>		
VF10--	UTIČNICA ŠUKO+POKLOPAC IP44 2P+E 16A 250V~	220
VF12--	UTIČNICA ŠUKO+POKLOPAC IP44 2P+E 16A 250V~ BV	220
<b>SETOVI CF</b>		
CF10--	SET ŠUKO UTIČNICA DVOSTRUKE VODORAVNI IP44 2x2P+E 16A 250V~	221
CF11--	SET ŠUKO UTIČNICA DVOSTRUKE OKOMITI IP44 2x2P+E 16A 250V~	221
CF12--	SET ŠUKO UTIČNICA + SKLOPKA IZMJENIČNA VODORAVNI IP44 16A + 10AX 250V~	221
CF13--	SET ŠUKO UTIČNICA + SKLOPKA IZMJENIČNA OKOMITI IP44 16A + 10AX 250V~	222
CF14--	SET ŠUKO UTIČNICA DVOSTRUKE VODORAVNI IP44 2x2P+E 16A 250V~BV	222
CF15--	SET ŠUKO UTIČNICA DVOSTRUKE OKOMITI IP44 2x2P+E 16A 250V~BV	222
CF16--	SET UTIČNICA + SKLOPKA IZMJENIČNA VODORAVNI IP44 16A + 10AX 250V~BV	222
CF17--	SET UTIČNICA SKLOPKA IZMJENIČNA OKOMITI IP44 16A + 10AX 250V~BV	222
<b>PRIBOR AF</b>		
AF10--	RAZDJELNI ORMARIĆ IP44 RN01	223
AF20--	RAZDJELNI ORMARIĆ IP55 ND01	223





**TEM**

TEM ČATEŽ d.o.o.  
Čatež 13, 8212 VELIKA LOKA  
SLOVENIJA  
[tem@tem.si](mailto:tem@tem.si)  
[www.tem.si](http://www.tem.si)  
T +386(0)7 348 99 00



[www.tem.si](http://www.tem.si)